

Hui Dong Jia Xing Long Plastic Factory Ltd. EMC REPORT

Prepared For :	Hui Dong Jia Xing Long Plastic Factory Ltd. Jiaotian Taiyuan Industrial Zone, Pingshan Town, Huidong County
Product Name:	XG201143,XG201142,XT140756A1,XW201141,SW200939B1, SG201145A1
Trade Mark:	--
Main Test Model :	AA*3BD100,C*3BD130,C*3BD70,AA*3BD50,AA*2BD70
Additional Model	--
Prepared By :	TST Testing Technology(Dongguan) Co., Ltd. 2F Yinhe Building Hetian Road,Houjie Town, Dongguan, Guangdong, China
Test Date:	Apr.22,2021 To Apr.29,2021
Date of Report :	Apr.29,2021
Report No.:	TST202104Q2972-2ER



TABLE OF CONTENTS

TEST REPORT DECLARATION.....	5
1. TEST RESULTS SUMMARY.....	6
2. GENERAL INFORMATION.....	7
2.1. Report information.....	7
2.2. Measurement Uncertainty.....	7
3. PRODUCT DESCRIPTION.....	8
3.1. EUT Description.....	8
3.2. Block Diagram of EUT Configuration.....	8
3.3. Operating Condition of EUT.....	8
3.4. Test Conditions.....	8
3.5. Modifications.....	8
3.6. Abbreviations.....	9
3.7. Performance Criterion.....	9
4. TEST EQUIPMENT USED.....	10
4.1. For Conducted Emission Test.....	10
4.2. For Magnetic Test (In Shielding Room).....	10
4.3. For Radiated Emission Measurement.....	10
4.4. For Harmonic / Flicker Test.....	10
4.5. For Electrostatic Discharge Immunity Test.....	10
4.6. For RF Strength Susceptibility Test.....	11
4.7. For Electrical Fast Transient/Burst Immunity Test.....	11
4.8. For Surge Test.....	11
4.9. For Injected Currents Susceptibility Test.....	11
4.10. For Magnetic Field Immunity Test.....	11
4.11. For Voltage Dips and Interruptions Test.....	11
5. POWER LINE CONDUCTED EMISSION TEST.....	12
5.1. Block Diagram of Test Setup.....	12
5.2. Test Standard.....	12
5.3. Power Line Conducted Emission Limit.....	12
5.4. EUT Configuration on Test.....	12
5.5. Operating Condition of EUT.....	13
5.6. Test Procedure.....	13
5.7. Test Result.....	13
6. MAGNETIC TEST.....	14
6.1. Block Diagram of Test Setup.....	14
6.2. Test Standard.....	14
6.3. Magnetic Field Emission Limits.....	14
6.4. EUT Configuration on Test.....	14
6.5. Operating Condition of EUT.....	14
6.6. Test Procedure.....	15
6.7. Test Results.....	15
7. RADIATED EMISSION TEST.....	16
7.1. Open Site Setup Diagram.....	16
7.2. Test Standard.....	16
7.3. Radiated Emission Limit.....	16
7.4. EUT Configuration on Test.....	16



7.5. Operating Condition of EUT.....	17
7.6. Test Procedure.....	17
7.7. Test Results.....	17
8. HARMONIC CURRENT EMISSION TEST.....	18
8.1. Block Diagram of Test Setup.....	18
8.2. Test Standard.....	18
8.3. Operating Condition of EUT.....	18
8.4. Test Procedure.....	18
8.5. Test Results.....	18
9. VOLTAGE FLUCTUATIONS & FLICKER TEST.....	19
9.1. Block Diagram of Test Setup.....	19
9.2. Test Standard.....	19
9.3. Operating Condition of EUT.....	19
9.4. Test Data.....	19
9.5. Test Results.....	19
10. ELECTROSTATIC DISCHARGE TEST.....	20
10.1. Block Diagram of ESD Test Setup.....	20
10.2. Test Standard.....	20
10.3. Severity Levels and Performance Criterion.....	20
10.4. EUT Configuration on Test.....	20
10.5. Operating Condition of EUT.....	21
10.6. Test Procedure.....	21
10.7. Test Results.....	21
11. RF FIELD STRENGTH SUSCEPTIBILITY TEST.....	23
11.1. R/S Test Setup.....	23
11.2. Test Standard.....	23
11.3. Severity Levels and Performance Criterion.....	23
11.4. EUT Configuration on Test.....	24
11.5. Operating Condition of EUT.....	24
11.6. Test Procedure.....	24
11.7. Test Results.....	24
12. ELECTRICAL FAST TRANSIENT/BURST TEST.....	26
12.1. EFT Test Setup.....	26
12.2. Test Standard.....	26
12.3. Severity Levels and Performance Criterion.....	26
12.4. EUT Configuration on Test.....	26
12.5. Operating Condition of EUT.....	26
12.6. Test Procedure.....	27
12.7. Test Results.....	27
13. SURGE TEST.....	29
13.1. Surge Test Setup.....	29
13.2. Test Standard.....	29
13.3. Severity Levels and Performance Criterion.....	29
13.4. EUT Configuration on Test.....	29
13.5. Operating Condition of EUT.....	29
13.6. Test Procedure.....	30
13.7. Test Results.....	30
14. INJECTED CURRENTS SUSCEPTIBILITY TEST.....	32
14.1. Block Diagram of Test AC Mains Setup.....	32
14.2. Test Standard.....	32



14.3. Severity Levels and Performance Criterion.....	32
14.4. EUT Configuration on Test.....	32
14.5. Operating Condition of EUT.....	32
14.6. Test Procedure.....	33
14.7. Test Results.....	33
15. MAGNETIC FIELD IMMUNITY TEST.....	35
15.1. Block Diagram of Test Setup.....	35
15.2. Test Standard.....	35
15.3. Severity Levels and Performance Criterion.....	35
15.4. EUT Configuration on Test.....	35
15.5. Operating Condition of EUT.....	36
15.6. Test Procedure.....	36
15.7. Test Results.....	36
16. VOLTAGE DIPS AND INTERRUPTIONS TEST.....	38
16.1. Voltage Dips and Interruptions Test Setup.....	38
16.2. Test Standard.....	38
16.3. Severity Levels and Performance Criterion.....	38
16.4. EUT Configuration on Test.....	38
16.5. Operating Condition of EUT.....	38
16.6. Test Procedure.....	39
16.7. Test Result.....	39
APPENDIX I.....	41
APPENDIX II.....	44
APPENDIX IV.....	49



TEST REPORT DECLARATION

Applicant	:	Hui Dong Jia Xing Long Plastic Factory Ltd.
Address	:	Jiaotian Taiyuan Industrial Zone, Pingshan Town, Huidong County
EUT Description	:	XG201143,XG201142,XT140756A1,XW201141,SW200939B1,SG
Model Number	:	AA*3BD100,C*3BD130,C*3BD70,AA*3BD50,AA*2BD70

Test Standards:

EN IEC 55015:2019+A11:2020
EN IEC 61000-3-2:2019
EN 61000-3-3:2013+A1:2019
EN 61547:2009 (EN 61000-4-2:2009, EN 61000-4-3:2006+A2:2010,
EN 61000-4-4:2012, EN 61000-4-5:2014+A1:2017, EN IEC 61000-4-6:2019,
EN 61000-4-8:2010, EN IEC 61000-4-11:2020)


The EUT described above is tested by TST Technology Co., Ltd. EMC Laboratory to determine the maximum emissions from the EUT and ensure the EUT to be compliance with the immunity requirements of the EUT. TST Technology Co., Ltd. EMC Laboratory is assumed full responsibility for the accuracy of the test results. Also, this report shows that the EUT technically complies with the 2014/30/EU directive and its amendment requirements.

The test report is valid for above tested sample only and shall not be reproduced in part without written approval of the laboratory.

Tested by:


Test Engineer

Reviewer :


Supervisor

Approved & Authorized Signer :



Andy/Manager

原创力文档

max.book118.com

预览与源文档一致, 下载高清无水印



1. TEST RESULTS SUMMARY

Table 1 Test Results Summary

Test Items	Test Results
Power Line Conducted Emission Test	N/A
Magnetic Test	PASS
Radiated Emission	PASS
Harmonic Current Emission Test	N/A
Voltage Fluctuations & Flicker Test	N/A
Electrostatic Discharge Test	PASS
RF Field Strength Susceptibility Test	PASS
Electrical Fast Transient/Burst Test	N/A
Surge Test	N/A
Injected Currents Susceptibility Test	N/A
Magnetic Field Immunity Test	N/A
Voltage Dips And Interruptions Test	N/A



2. GENERAL INFORMATION

2.1. Report information

- 2.1.1. This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that TST approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that TST in any way guarantees the later performance of the product/equipment.
- 2.1.2. The sample/s mentioned in this report is/are supplied by Applicant, TST therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.
- 2.1.3. Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through TST, unless the applicant has authorized TST in writing to do so.

2.2. Measurement Uncertainty

Available upon request.




3. PRODUCT DESCRIPTION

3.1.EUT Description

Description	:	XG201143,XG201142,XT140756A1,XW201141,SW200939B1,SG201145A1
Applicant	:	Hui Dong Jia Xing Long Plastic Factory Ltd. 19f, Caihong Building, Caitian Road, Futian District, Shenzhen City, Guangdong
Manufacturer	:	Hui Dong Jia Xing Long Plastic Factory Ltd. 19f, Caihong Building, Caitian Road, Futian District, Shenzhen City, Guangdong
Model Number	:	AA*3BD100,C*3BD130,C*3BD70,AA*3BD50,AA*2BD70

3.2.Block Diagram of EUT Configuration



3.3.Operating Condition of EUT

Test mode 1: ON

3.4.Test Conditions

Temperature: 23-26℃

Relative Humidity: 55-68 %

3.5.Modifications

No modification was made.

原创力文档
max.book118.com
预览与源文档一致, 下载高清无水印



3.6. Abbreviations

AC	Alternating Current
AMN	Artificial Mains Network
DC	Direct Current
EM	ElectroMagnetic
EMC	ElectroMagnetic Compatibility
EUT	Equipment Under Test
IF	Intermediate Frequency
RF	Radio Frequency
rms	root mean square
EMI	Electromagnetic Interference
EMS	Electromagnetic Susceptibility

3.7. Performance Criterion

Criterion A: The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended.

Criterion B: After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the equipment is used as intended.

Criterion C: Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions.



4. TEST EQUIPMENT USED

4.1. For Conducted Emission Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESHS30	828985/018	Apr.23,22	1 Year
2.	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100006	Apr.23,22	1 Year
3.	L.I.S.N.	Rohde & Schwarz	ESH2-Z5	834549/005	Apr.23,22	1 Year
4.	Conical	Emtek	N/A	N/A	N/A	N/A
5.	Voltage Probe	Schwarzbeck	TK9416	N/A	Apr.23,22	1 Year
6.	Coaxial Switch	Anritsu	MP59B	6100214550	Apr.23,22	1 Year

4.2. For Magnetic Test (In Shielding Room)

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESHS20	836600/006	Apr.23,22	1 Year
2.	Triple-loop Antenna	Rohde & Schwarz	HM020	843885/002	Apr.23,22	1 Year
3.	RF Cable	MIYAZAKI	5D-2W	Tri-loop Cable	Apr.23,22	1/2 Year
4.	Coaxial Switch	Anritsu	MP59B	M73989	Apr.23,22	1/2 Year

4.3. For Radiated Emission Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	ANRITSU	MS2661C	6200140915	Apr.23,22	1 Year
2.	Test Receiver	Rohde & Schwarz	ESC830	828982/018	Apr.23,22	1 Year
3.	Bilog Antenna	Schwarzbeck	VULB9163	142	Apr.23,22	1 Year
4.	50 Coaxial Switch	Anritsu Corp	MP59B	6100237248	Apr.23,22	1 Year
5.	Cable	Schwarzbeck	AK9513	ACRX1	Apr.23,22	1 Year
6.	Cable	Rosenberger	N/A	FR2RX2	Apr.23,22	1 Year
7.	Cable	Schwarzbeck	AK9513	CRRX2	Apr.23,22	1 Year
8.	Cable	Schwarzbeck	AK9513	CRRX2	Apr.23,22	1 Year
9.	Signal Generator	HP	864A	3625U00573	Apr.23,22	1 Year

4.4. For Harmonic / Flicker Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Harmonic and Flicker analyzer	Laplace	AC2000A	309709	Apr.23,22	1 Year

4.5. For Electrostatic Discharge Immunity Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	ESD Tester	HAEFELY	PSD 1600	H911'292	Apr.23,22	1 Year



4.6. For RF Strength Susceptibility Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Signal Generator	HP	8648A	3633A02081	Apr.23,22	1 Year
2.	Amplifier	A&R	500A100	17034	NCR	NCR
3.	Amplifier	A&R	100W/1000M1	17028	NCR	NCR
4.	Isotropic Field Monitor	A&R	FM2000	16829	NCR	NCR
5.	Isotropic Field Probe	A&R	FLW220100	16755	Apr.23,22	1 Year
6.	Biconic Antenna	EMCO	3108	9507-2534	NCR	NCR
7.	Log-periodic Antenna	A&R	AT1080	16812	NCR	NCR
8.	PC	N/A	486DX2	N/A	N/A	N/A

4.7. For Electrical Fast Transient/Burst Immunity Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Burst Tester	HAEFELY	PEFT 4010	080981-16	Apr.23,22	1 Year

4.8. For Surge Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Surge Tester	HAEFELY	PSURGE4.1	080107-04	Apr.23,22	1 Year

4.9. For Injected Currents Susceptibility Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Simulator	EMTEST	CWS 500C	0900-12	Apr.23,22	1 Year
2.	CDN	EMTEST	CDN-M2	510010010010	Apr.23,22	1 Year
3.	VDN	EMTEST	CDN-M3	0900-11	Apr.23,22	1 Year
4.	Injection Clamp	EMTEST	F-2031-23MM	368	Apr.23,22	1 Year
5.	Attenuator	EMTEST	ATT6	0010222a	Apr.23,22	1 Year

4.10. For Magnetic Field Immunity Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Magnetic Field Tester	HAEFELY	MAG100.1	083858-10	Apr.23,22	1 Year


4.11. For Voltage Dips and Interruptions Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
2.	Dips Tester	HAEFELY	PLINE 1610	083732-18	Apr.23,22	1 Year



5. POWER LINE CONDUCTED EMISSION TEST

5.1. Block Diagram of Test Setup

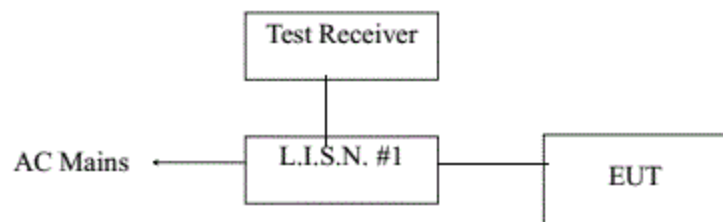

5.2. Test Standard

EN IEC 55015:2019+A11:2020

5.3. Power Line Conducted Emission Limit

Frequency	At mains terminals (dBμV)	
	Quasi-peak Level	Average Level
9KHz ~ 50KHz	110	--
50KHz ~ 150KHz	90 ~ 80*	--
150KHz ~ 0.5MHz	66 ~ 56*	56 ~ 46*
0.5MHz ~ 5.0MHz	56	46
5.0MHz ~ 30MHz	60	50

1. At the transition frequency the lower limit applies.
2. * decreasing linearly with logarithm of the frequency.

5.4. EUT Configuration on Test

The following equipments are installed on conducted emission test to meet EN 55015 requirement and operating in a manner, which tends to maximize its emission characteristics in a normal application.

5.4.1. EUT Information

Model Number : AA*3BD100,C*3BD130,C*3BD70,AA*3BD50,AA*2BD70
Serial Number : N/A
Manufacturer : Hui Dong Jia Xing Long Plastic Factory Ltd.



5.5. Operating Condition of EUT

5.5.1. Setup the EUT and simulators as shown in Section 5.4

5.5.2. Turn on the power of all equipments.

5.5.3. Let the EUT work in test modes (ON) and test it.

5.6. Test Procedure

The EUT is put on the table which is 0.8 meter high above the ground and connected to the AC mains through a Line Impedance Stabilization Network (L.I.S.N.). This provided a 50ohm coupling impedance for the tested equipments. Both sides of AC line are checked to find out the maximum conducted emission according to the EN 55015 regulations during conducted emission test. And the voltage probe had been used for the load terminals test according to the EN 55015 standard.

The bandwidth of the test receiver (R&S ESHS20) is set at 10KHz. in 150KHz~30MHz and 200Hz bandwidth in 9KHz~150KHz.


The frequency range from 9KHz to 30MHz is checked.

5.7. Test Result

N/A

6. MAGNETIC TEST

6.1. Block Diagram of Test Setup

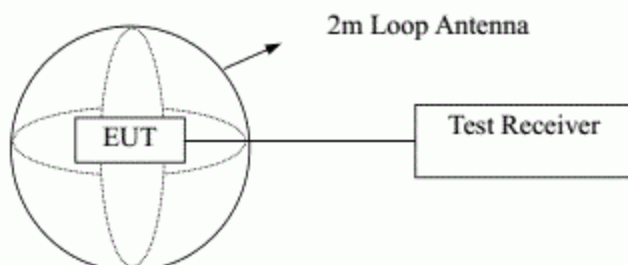

6.2. Test Standard

EN IEC 55015:2019+A11:2020

6.3. Magnetic Field Emission Limits

Frequency	Limits for loop diameter (dB μ A)
	2m
9KHz ~ 70KHz	88
70KHz ~ 150KHz	88 ~ 58*
150KHz ~ 2.2MHz	58 ~ 26*
2.2MHz ~ 3.0MHz	58
3.0MHz ~ 30MHz	22

1. At the transition frequency the lower limit applies.
2. * decreasing linearly with logarithm of the frequency.

6.4. EUT Configuration on Test

The configuration of the EUT is same as Section 5.4

6.5. Operating Condition of EUT

- 6.5.1. Setup the EUT as shown in Section 6.1.
- 6.5.2. Turn on the power of all equipments.
- 6.5.3. Let the EUT work in test mode (ON) and test it.



6.6. Test Procedure

The EUT is placed on a wood table in the center of a loop antenna. The induced current in the loop antenna is measured by means of a current probe and the test receiver. Three field components is checked by means of a coax switch.

The frequency range from 9KHz to 30MHz is investigated. The receiver is measured with the quasi-peak detector. For frequency band 9KHz to 150KHz, the bandwidth of the field strength meter (R&S test receiver ESHS20) is set at 200Hz. For frequency band 150KHz to 30MHz, the bandwidth is set at 10KHz.

All the test results are listed in Section 6.7. and all the scanning waveform is put in **Appendix I**.


6.7. Test Results

PASS.

The frequency range from 9KHz to 30MHz is investigated.
As the peak value is too low against the limit, so the Quasi-peak value has been omitted.

7. RADIATED EMISSION TEST

7.1. Open Site Setup Diagram

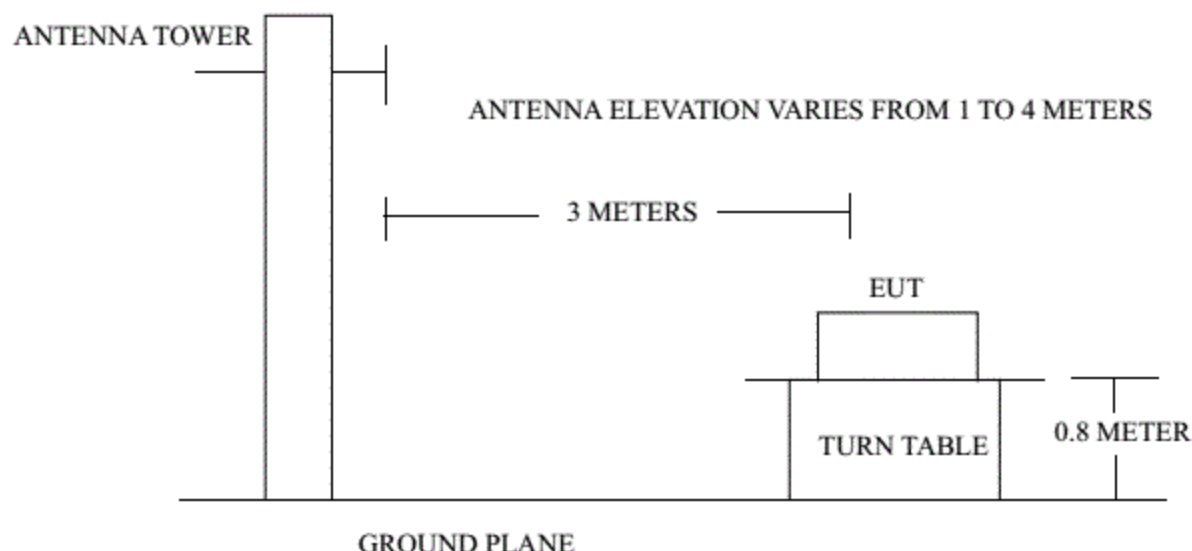

7.2. Test Standard

EN IEC 55015:2019+A11:2020

7.3. Radiated Emission Limit

All emanations from a computing devices or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified below:

FREQUENCY (MHz)	DISTANCE (Meters)	FIELD STRENGTHS LIMITS (dB μ V/m)
30 ~ 230	3	40
230 ~ 300	3	47

Note: (1) The tighter limit shall apply at the edge between two frequency bands.

(2) Distance refers to the distance in meters between the measuring instruments antenna and the closed point of any part of the EUT.

7.4. EUT Configuration on Test

The EN 55015 regulations test method must be used to find the maximum emission during radiated emission test.



7.5. Operating Condition of EUT

- 7.5.1. Setup the EUT as shown on Section 7.1
- 7.5.2. Turn on the power of all equipments.
- 7.5.3. Let the EUT work in test mode and measure it.

7.6. Test Procedure

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can move up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna (calibrated by dipole antenna) are used as a receiving antenna. Both horizontal and vertical polarization of the antenna are set on test.

The bandwidth setting on the test receiver (R&S TEST RECEIVER ESCS20) is 120 KHz.

The EUT is tested in Semi-Anechoic Chamber. and all the scanning waveform is put in


Appendix II.

7.7. Test Results

PASS.

8. HARMONIC CURRENT EMISSION TEST

8.1. Block Diagram of Test Setup

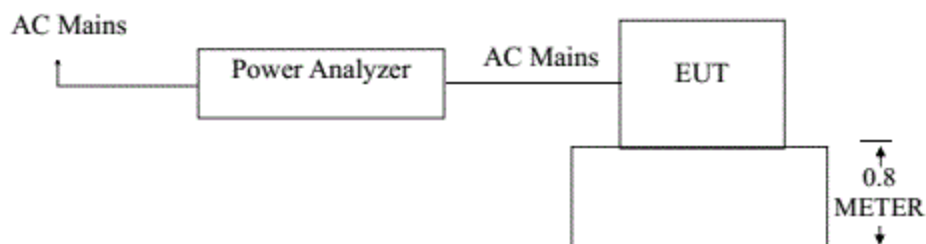

8.2. Test Standard

EN IEC 61000-3-2:2019

Class A

8.3. Operating Condition of EUT

8.3.1. Setup the EUT as shown in Section 8.1

8.3.2. Turn on the power of all equipments.

8.3.3. Let the EUT work in test mode (ON) and test it.

8.4. Test Procedure

The power cord of the EUT is connected to the output of the test system. Turn on the Power of the EUT and use the test system to test the harmonic current level.

8.5. Test Results

N/A.



9. VOLTAGE FLUCTUATIONS & FLICKER TEST

9.1. Block Diagram of Test Setup

Same as Section 8.1

9.2. Test Standard

EN 61000-3-3:2013+A1:2019

9.3. Operating Condition of EUT

Same as Section 8.3. The power cord of the EUT is connected to the output of the test system. Turn on the power of the EUT and use the test system to test the harmonic current level.

Flicker Test Limit

Test items	Limits
Pst	1.0
dc	3.3%
dmax	4.0%
dt	Not exceed 3.3% for 500ms

9.4. Test Data

Flicker test Data


Model No.: AA*3BD100,C*3BD130,C*3BD70,AA*3BD50,AA*2BD70		
Test Mode: ON		
Items	Reading	Limit
dmax	0.01	4.0%
dc	0.03	3.3%
dt	0.05	Not exceed 3.3% for 500ms
Pst	0.001	1.0

9.5. Test Results

N/A

10. ELECTROSTATIC DISCHARGE TEST

10.1. Block Diagram of ESD Test Setup

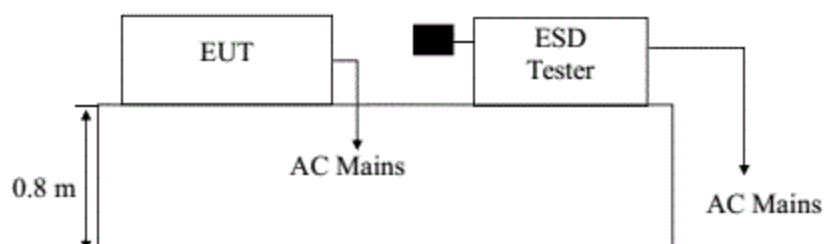

Remark:  is Discharge Electrode

10.2. Test Standard

EN 61547:2009 (EN 61000-4-2:2009)
Severity Level 3 for Air Discharge at 8KV
Severity Level 2 for Contact Discharge at 4KV

10.3. Severity Levels and Performance Criterion

10.3.1. Severity level

Level	Test Voltage Contact Discharge (KV)	Test Voltage Air Discharge (KV)
1.	2	2
2.	4	4
3.	6	8
4.	8	15
X.	Special	Special

10.3.2. Performance criterion: B

10.4. EUT Configuration on Test

The configuration of EUT are listed in Section 5.4



10.5. Operating Condition of EUT

- 10.5.1. Setup the EUT as shown in Section 10.1
- 10.5.2. Turn on the power of all equipments.
- 10.5.3. Let the EUT work in test mode (ON) and test it.

10.6. Test Procedure

10.6.1. Air Discharge:

This test is done on a non-conductive surfaces. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT.

After each discharge, the discharge electrode shall be removed from the EUT.

The generator is then re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed.

10.6.2. Contact Discharge:

All the procedure shall be same as Section 10.6.1. except that the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.

10.6.3. Indirect discharge for horizontal coupling plane

At least 20 single discharges shall be applied to the horizontal coupling plane, at points on each side of the EUT. The discharge electrode positions vertically at a distance of 0.1m from the EUT and with the discharge electrode touching the coupling plane.

10.6.4. Indirect discharge for vertical coupling plane

At least 20 single discharge shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

10.7. Test Results

PASS.

Please refer to the following page.



Electrostatic Discharge Test Results


TST Testing Technology Co., Ltd.

<i>Applicant</i>	: Hui Dong Jia Xing Long Plastic Factory Ltd.	<i>Test Date</i>	: Apr.29,2021
<i>EUT</i>	: XG201143,XG201142,XT140756A1,XW201141,SW200939B1,SG201145A1	<i>Temperature</i>	: 22 °C
<i>M/N</i>	: AA*3BD100,C*3BD130,C*3BD70,AA*3BD50,AA*2BD70	<i>Humidity</i>	: 50 %
<i>Power Supply</i>	: DC 5V	<i>Test Mode</i>	: ON
<i>Air Discharge: ±8KV</i> <i>For each point positive 10 times and negative 10 times discharge.</i> <i>Contact Discharge: ±4KV</i>			
<i>Location</i>	<i>Kind</i> <i>A-Air Discharge</i> <i>C-Contact Discharge</i>		<i>Result</i>
<i>Slots</i>	<i>A</i>		<i>PASS</i>
<i>HCP</i>	<i>C</i>		<i>PASS</i>
<i>VCP of Front</i>	<i>C</i>		<i>PASS</i>
<i>VCP of Rear</i>	<i>C</i>		<i>PASS</i>
<i>VCP of Left</i>	<i>C</i>		<i>PASS</i>
<i>VCP of Right</i>	<i>C</i>		<i>PASS</i>

Discharge should be considered on Contact and Air and Horizontal Coupling Plane (HCP) and Vertical Coupling Plane (VCP).

11.RF FIELD STRENGTH SUSCEPTIBILITY TEST

11.1.R/S Test Setup

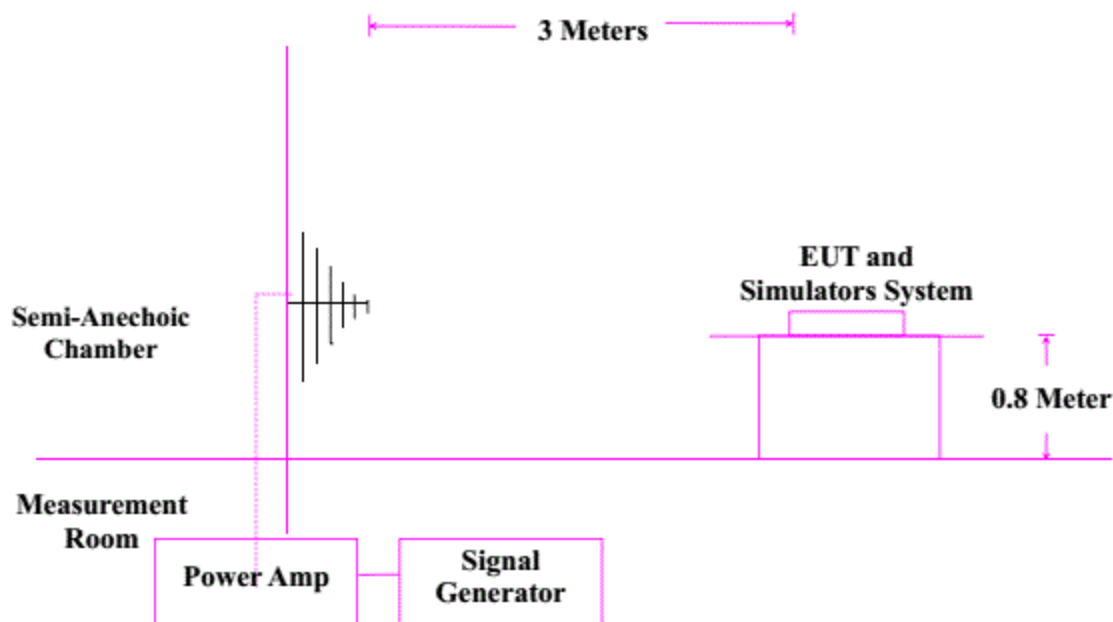

11.2.Test Standard

EN 61547:2009 (EN 61000-4-3:2006+A2:2010)
Severity Level 2 at 3V / m

11.3.Severity Levels and Performance Criterion

11.3.1.Severity level

Level	Field Strength V/m
1.	1
2.	3
3.	10
X.	Special

11.3.2.Performance criterion : A



11.4.EUT Configuration on Test

The configuration of EUT are listed in Section 5.4

11.5.Operating Condition of EUT

Setup the EUT as shown in Section 11.1.. The operating condition of EUT are listed in section 3.3.

11.6.Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above the ground. The EUT is set 3 meters away from the transmitting antenna which is mounted on an antenna tower. Both horizontal and vertical polarization of the antenna are set on test. Each of the four sides of EUT must be faced this transmitting antenna and measured individually.

In order to judge the EUT performance, a CCD camera is used to monitor the EUT.

All the scanning conditions are as follows :

Condition of Test	Remarks
1. Fielded Strength	3 V/m (Severity Level 2)
2. Radiated Signal	Modulated
3. Scanning Frequency	80 - 1000 MHz, 1.4 - 2.7 GHz
4. Sweeping time of radiated	0.0015 decade/s
5. Dwell Time	1 Sec.

11.7.Test Results

PASS.

Please refer to the following page.




RF Field Strength Susceptibility Test Results

TST Testing Technology Co., Ltd. .

Applicant	: Hui Dong Jia Xing Long Plastic Factory Ltd.	Test Date	: Apr.29,2021
EUT	: XG201143,XG201142,XT140756A1,XW201141,SW200939B1,SG201145A1	Temperature	: 22 ℃
M/N	: AA*3BD100,C*3BD130,C*3BD70,AA*3BD50,AA*2BD70	Humidity	: 50 %
Power Supply	: DC 5V	Test Mode	: ON
		Frequency Range	: 80 MHz to 1000 MHz 1.4 GHz to 2.7 GHz
Modulation: ☒ AM ☐ Pulse ☐ none 1 KHz 80%			
Criterion : A			
		Frequency Rang : 80 MHz to 1000 MHz, 1.4 GHz to 2.7 GHz	
Steps	1%		1%
	Horizontal		Vertical
Front	Pass		Pass
Right	Pass		Pass
Rear	Pass		Pass
Left	Pass		Pass

12.ELECTRICAL FAST TRANSIENT/BURST TEST

12.1.EFT Test Setup

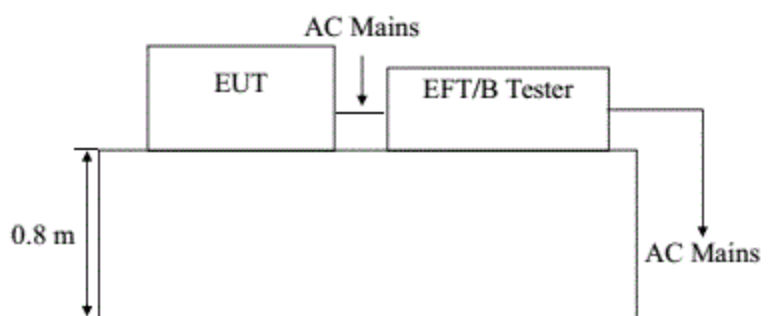

12.2.Test Standard

EN 61547:2009 (EN 61000-4-4:2012)
Severity Level 2 at 1KV

12.3.Severity Levels and Performance Criterion

12.3.1.Severity level

Open Circuit Output Test Voltage $\pm 10\%$		
Level	On Power Supply Lines	On I/O (Input/Output) Signal data and control lines
1.	0.5 KV	0.25 KV
2.	1 KV	0.5 KV
3.	2 KV	1 KV
4.	4 KV	2 KV
X	Special	Special

12.3.2.Performance criterion : B

12.4.EUT Configuration on Test

The configuration of EUT are listed in Section 5.4

12.5.Operating Condition of EUT

Setup the EUT as shown in Section 12.1.. The operating condition of EUT are listed in section 3.3.



12.6. Test Procedure

The EUT is put on the table which is 0.8 meter high above the ground. This reference ground plane shall project beyond the EUT by at least 0.1m on all sides and the minimum distance between the EUT and all other conductive structure, except the ground plane beneath the EUT, shall be more than 0.5m.

12.6.1. For input and output AC power ports:

The EUT is connected to the power mains by using a coupling device which couples the EFT interference signal to AC power lines. Both polarities of the test voltage should be applied during compliance test and the duration of the test is 2 mins.

12.6.2. For signal lines and control lines ports:

It's unnecessary to test.

12.6.3. For DC output line ports:

It's unnecessary to test.

12.7. Test Results

N/A




Electrical Fast Transient/Burst Test Results

TST Testing Technology Co., Ltd. .

<i>Applicant</i> :		<i>Hui Dong Jia Xing Long Plastic Factory Ltd.</i>			<i>Test Date</i> :		<i>Apr.29,2021</i>		
<i>EUT</i> :		<i>XG201143,XG201142,XT140756A1,XW201141,SW200939B1,SG201145A1</i>			<i>Temperature</i> :		<i>22 ℃</i>		
<i>M/N</i> :		<i>AA*3BD100,C*3BD130,C*3BD70,AA*3BD50,AA*2BD70</i>			<i>Humidity</i> :		<i>50 %</i>		
<i>Power Supply</i> :		<i>DC 5V</i>			<i>Test Mode</i> :		<i>ON</i>		
<i>Inject Place : AC Mains</i>									
<i>Inject Line</i>	<i>Voltage KV</i>	<i>Inject Time(s)</i>	<i>Inject Method</i>	<i>Results</i>	<i>Inject Line</i>	<i>Voltage KV</i>	<i>Inject Time(s)</i>	<i>Inject Method</i>	<i>Results</i>
<i>L</i>	<i>±1</i>	<i>120</i>	<i>Direct</i>	<i>--</i>					
<i>N</i>	<i>±1</i>	<i>120</i>	<i>Direct</i>	<i>--</i>					
<i>L N</i>	<i>±1</i>	<i>120</i>	<i>Direct</i>	<i>--</i>					

13.SURGE TEST

13.1.Surge Test Setup

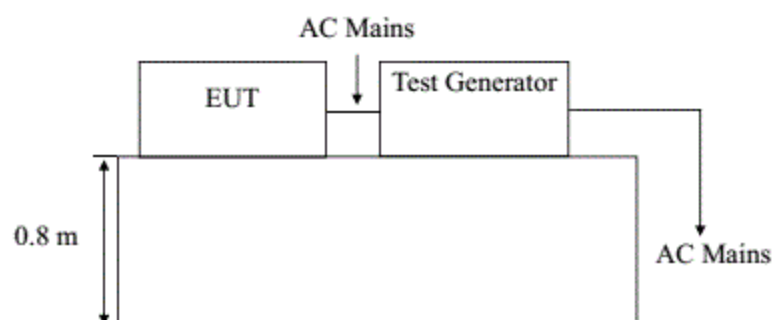

13.2.Test Standard

EN 61547:2009 (N 61000-4-5:2014+A1:2017)
Severity Level 2 for Line to Neutral at 1.0KV

13.3.Severity Levels and Performance Criterion

13.3.1.Severity level

Severity Level	Open-Circuit Test Voltage KV
1	0.5
2	1.0
3	2.0
4	4.0
*	Special

Performance criterion : **B**

13.4.EUT Configuration on Test

The configuration of EUT are listed in Section 5.4.

13.5.Operating Condition of EUT

13.5.1.Setup the EUT as shown in Section 13.1..

13.5.2.Turn on the power of all equipments.

13.5.3.Let the EUT work in test mode (ON) and test it.



13.6.Test Procedure

- 1) Set up the EUT and test generator as shown on Section 13.1
- 2) For line to line coupling mode, provide a 0.5KV 1.2/50us voltage surge (at open-circuit condition) and 8/20us current surge to EUT selected points.
- 3) At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are conducted during test.
- 4) Different phase angles are done individually.
- 5) Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.

13.7.Test Results

N/A

原创力文档
max.book118.com
预览与源文档一致, 下载高清无水印




Surge Immunity Test Results

TST Testing Technology Co., Ltd.

Applicant : Hui Dong Jia Xing Long Plastic Factory Ltd.				Test Date : Apr.29,2021	
EUT : XG201143,XG201142,XT140756A1,XW201141,SW200939B1,SG201145A1				Temperature : 22℃	
M/N : AA*3BD100,C*3BD130,C*3BD70,AA*3BD50,AA*2BD70				Humidity : 50%	
Power Supply : DC 5V				Test Mode : ON	
Location	Polarity	Phase Angle	No of Pulse	Pulse Voltage (KV)	Result
L-N	+	0	5	1.0	--
	+	90	5	1.0	--
	+	180	5	1.0	--
	+	270	5	1.0	--
	-	0	5	1.0	--
	-	90	5	1.0	--
	-	180	5	1.0	--
	-	270	5	1.0	--

14. INJECTED CURRENTS SUSCEPTIBILITY TEST

14.1. Block Diagram of Test AC Mains Setup

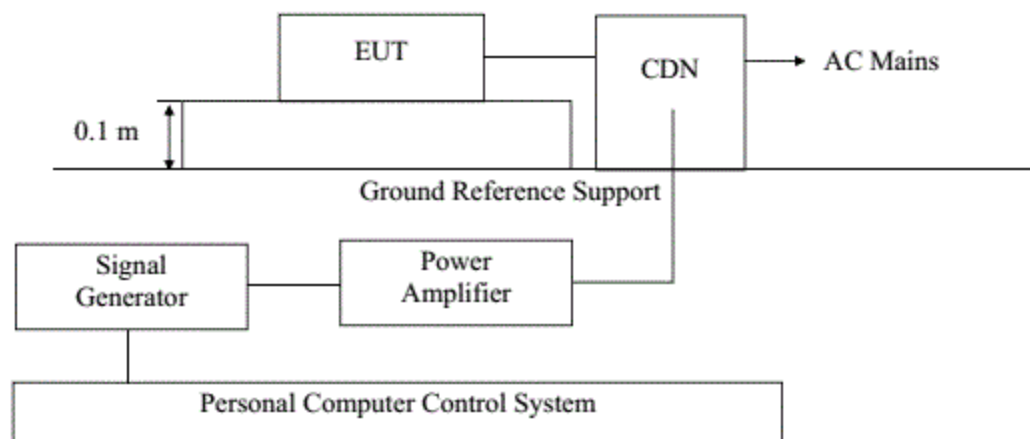

14.2. Test Standard

EN 61547:2009 (EN IEC 61000-4-6:2019)
Severity Level 2 at 3 V (rms), 0.15MHz ~ 80MHz

14.3. Severity Levels and Performance Criterion

14.3.1. Severity level

Level	Field Strength V/m
1.	1
2.	3
3.	10
X	Special

14.3.2. Performance criterion: A

14.4. EUT Configuration on Test

The configuration of EUT are listed in Section 5.4

14.5. Operating Condition of EUT

Setup the EUT as shown in Section 14.1.. The operating condition of EUT are listed in section 3.3.

14.6. Test Procedure

- 1) Set up the EUT, CDN and test generators as shown on Section 14.1.
- 2) Let the EUT work in test mode and test it.
- 3) The EUT are placed on an insulating support 0.8m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible).
- 4) The disturbance signal described below is injected to EUT through CDN.
- 5) The EUT operates within its operational mode(s) under intended climatic conditions after power on.
- 6) The frequency range is swept from 150KHz to 80MHz using 3V signal level, and with the disturbance signal 80% amplitude modulated with a 1KHz sine wave.
- 7) The rate of sweep shall not exceed 1.5×10^{-3} decades/s. Where the frequency is swept incrementally, the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.
- 8) Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.

14.7. Test Results

N/A



Injected Currents Susceptibility Test Results

TST Testing Technology Co., Ltd.

<i>Applicant</i> : <i>Hui Dong Jia Xing Long Plastic Factory Ltd.</i>		<i>Test Date</i> : <i>Apr.29,2021</i>		
<i>EUT</i> : <i>XG201143,XG201142,XT140756A1,XW201141,SW200939B1,SG201145A1</i>		<i>Temperature</i> : <i>22 ℃</i>		
<i>M/N</i> : <i>AA*3BD100,C*3BD130,C*3BD70,AA*3BD50,AA*2BD70</i>		<i>Humidity</i> : <i>50 %</i>		
<i>Power Supply</i> : <i>DC 5V</i>		<i>Test Mode</i> : <i>ON</i>		
<i>Frequency Range (MHz)</i>	<i>Injected Position</i>	<i>Strength</i>	<i>Criterion</i>	<i>Result</i>
<i>0.15 ~ 20</i>	<i>AC Line</i>	<i>3V(rms), Unmodulated</i>	<i>A</i>	<i>--</i>
<i>20 ~ 80</i>	<i>AC Line</i>	<i>3V(rms), Unmodulated</i>	<i>A</i>	<i>--</i>
<i>Remark : 1. Modulation Signal:1KHz 80% AM 2. Standard Applied : EN61000-4-6</i>		<i>Note:</i>		


15. MAGNETIC FIELD IMMUNITY TEST

15.1. Block Diagram of Test Setup

15.1.1. Block Diagram of the EUT



15.1.2. Block Diagram of Test Setup

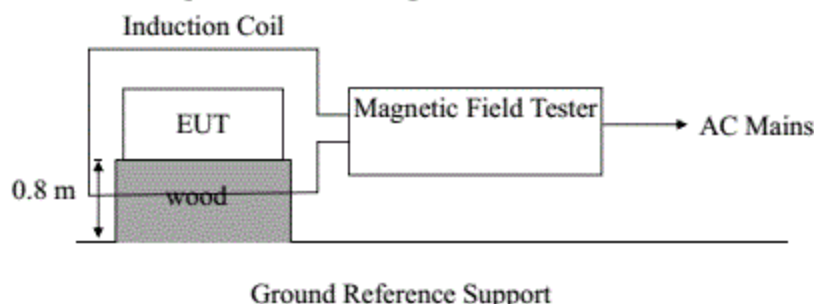

15.2. Test Standard

EN 61547:2009 (EN 61000-4-8: 2010)

Severity Level 2 at 3A/m

15.3. Severity Levels and Performance Criterion

15.3.1. Severity level

Level	Magnetic Field Strength A/m
1.	1
2.	3
3.	10
4.	30
5.	100
X.	Special

15.3.2. Performance criterion : A

15.4. EUT Configuration on Test

The configuration of EUT are listed in Section 5.4



15.5. Operating Condition of EUT

15.5.1. Setup the EUT as shown in Section 15.1

15.5.2. Turn on the power of all equipments.

15.5.3. Let the EUT work in test mode (ON) and test it.

15.6. Test Procedure

The EUT shall be subjected to the test magnetic field by using the induction coil of standard dimensions (1m*1m) and shown in Section 15.1. The induction coil shall then be rotated by 90° in order to expose the EUT to the test field with different orientations.

15.7. Test Results

N/A




Magnetic Field Immunity Test Results

TST Testing Technology Co., Ltd.

<i>Applicant</i> : HUI DONG JIA XING LONG PLASTIC FACTORY LTD.			<i>Test Date</i> : Apr.29,2021	
<i>EUT</i> : FIXED LAMP			<i>Temperature</i> : 22 °C	
<i>M/N</i> : 410006			<i>Humidity</i> : 50 %	
<i>Power Supply</i> : DC 5V			<i>Test Mode</i> : ON	
<i>Test Level</i>	<i>Testing Duration</i>	<i>Coil Orientation</i>	<i>Criterion</i>	<i>Result</i>
3A/M	5 mins	Horizontal	A	PASS
3A/M	5 mins	Vertical	A	PASS
<i>Remark:</i>		<i>Test Equipment :</i> Magnetic Field Tester MAG100.1		

16. VOLTAGE DIPS AND INTERRUPTIONS TEST

16.1. Voltage Dips and Interruptions Test Setup

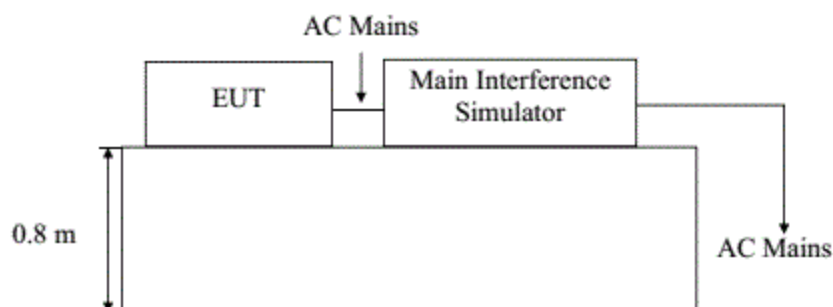

Remark: Combination wave generator and decoupling network are included in test generator.

16.2. Test Standard

EN 61547:2009 (EN IEC 61000-4-11:2020)

16.3. Severity Levels and Performance Criterion

16.3.1. Severity level

Test Level %U _T	Voltage dip and short interruptions %U _T	Duration (in period)
0	100	250p
40	60	5p
70	30	0.5p

16.3.2. Performance criterion : C&B

16.4. EUT Configuration on Test

The configuration of EUT are listed in Section 5.4

16.5. Operating Condition of EUT

16.5.1. Setup the EUT as shown in Section 16.1..

16.5.2. Turn on the power of all equipments.

16.5.3. Let the EUT work in test mode (ON) and test it.



16.6. Test Procedure

- 1) Set up the EUT and test generator as shown on Section 16.1.
- 2) The interruptions is introduced at selected phase angles with specified duration.
- 3) Record any degradation of performance.

16.7. Test Result

N/A




Voltage Dips And Interruptions Test Results

TST Testing Technology Co., Ltd.


<i>Applicant</i> : HUI DONG JIA XING LONG PLASTIC FACTORY LTD.			<i>Test Date</i> : Apr.29,2021		
<i>EUT</i> : FIXED LAMP			<i>Temperature</i> : 22 °C		
<i>M/N</i> : 410006			<i>Humidity</i> : 50 %		
<i>Power Supply</i> : DC 5V			<i>Test Mode</i> : ON		
<i>Test Level</i> % U_T	<i>Voltage Dips & Short Interruptions</i> % U_T	<i>Duration (in period)</i>	<i>Phase Angle</i>	<i>Criterion</i>	<i>Result</i>
70	30	10P	90°	C	PASS
0	100	0.5P	180°	B	PASS
<i>Remark:</i> U_T is the rated voltage for the equipment.			<i>Test Equipment :</i> Main Interference Simulator (HEAFELY PLINE1610)		



APPENDIX I

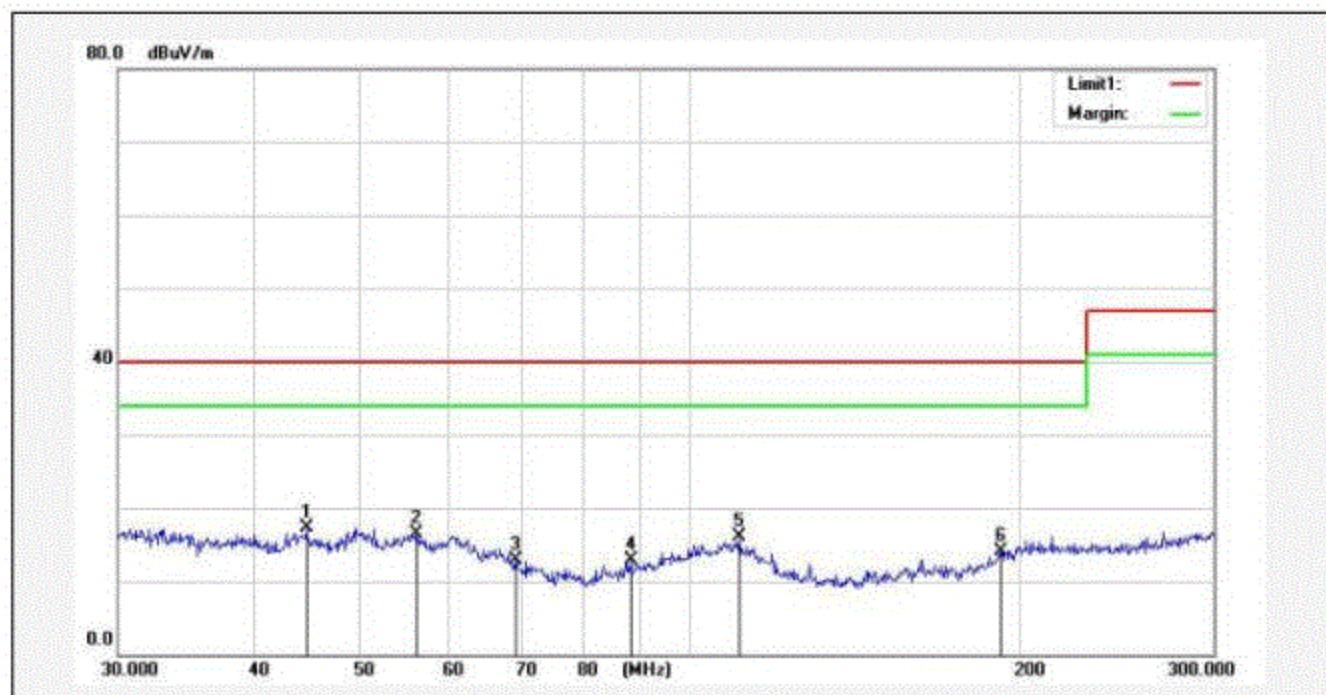


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	44.5781	57.47	-40.24	17.23	40.00	-22.77			peak
2	56.2498	56.76	-40.24	16.52	40.00	-23.48			peak
3	69.2024	53.15	-40.24	12.91	40.00	-27.09			peak
4	88.1295	53.10	-40.24	12.86	40.00	-27.14			peak
5	110.6933	56.28	-40.24	16.04	40.00	-23.96			peak
6	191.9205	54.29	-40.24	14.05	40.00	-25.95			peak

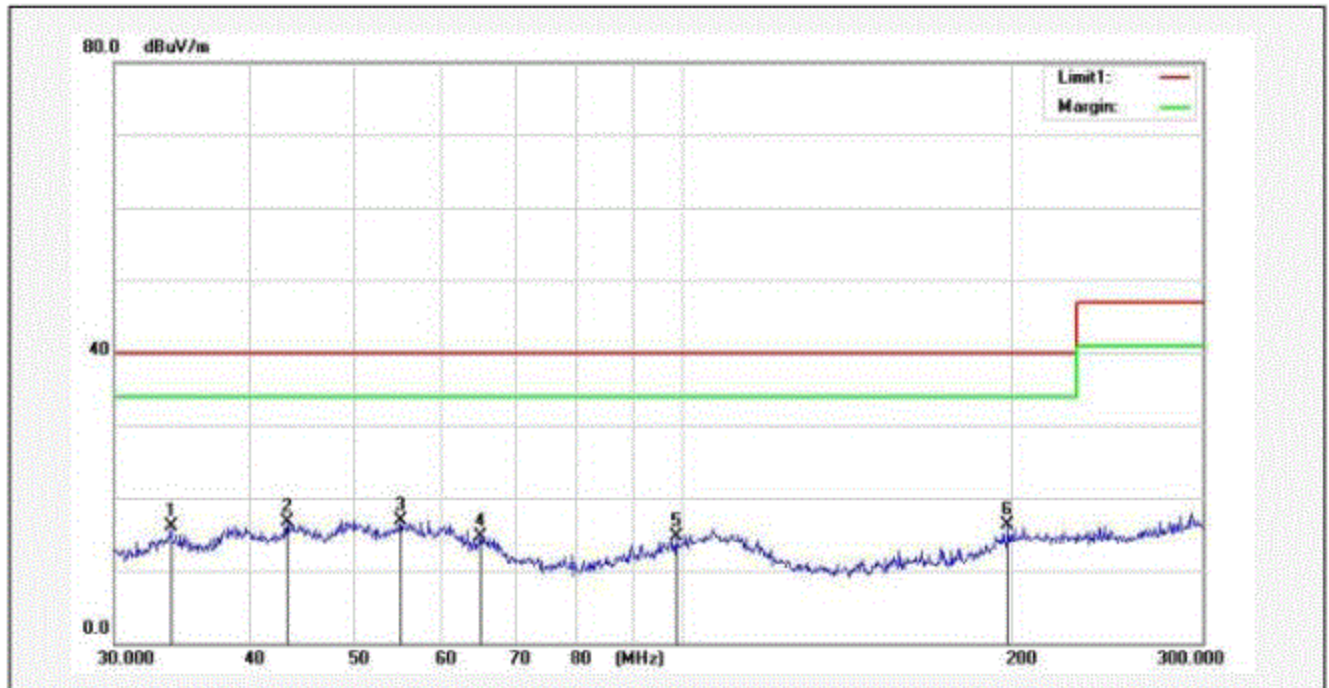


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	33.8160	34.29	-18.28	16.01	40.00	-23.99			peak
2	43.2635	33.58	-16.84	16.74	40.00	-23.26			peak
3	54.9694	33.62	-16.64	16.98	40.00	-23.02			peak
4	65.0311	33.44	-18.65	14.79	40.00	-25.21			peak
5	98.4286	33.55	-18.82	14.73	40.00	-25.27			peak
6	198.6650	34.53	-18.18	16.35	40.00	-23.65			peak




APPENDIX II

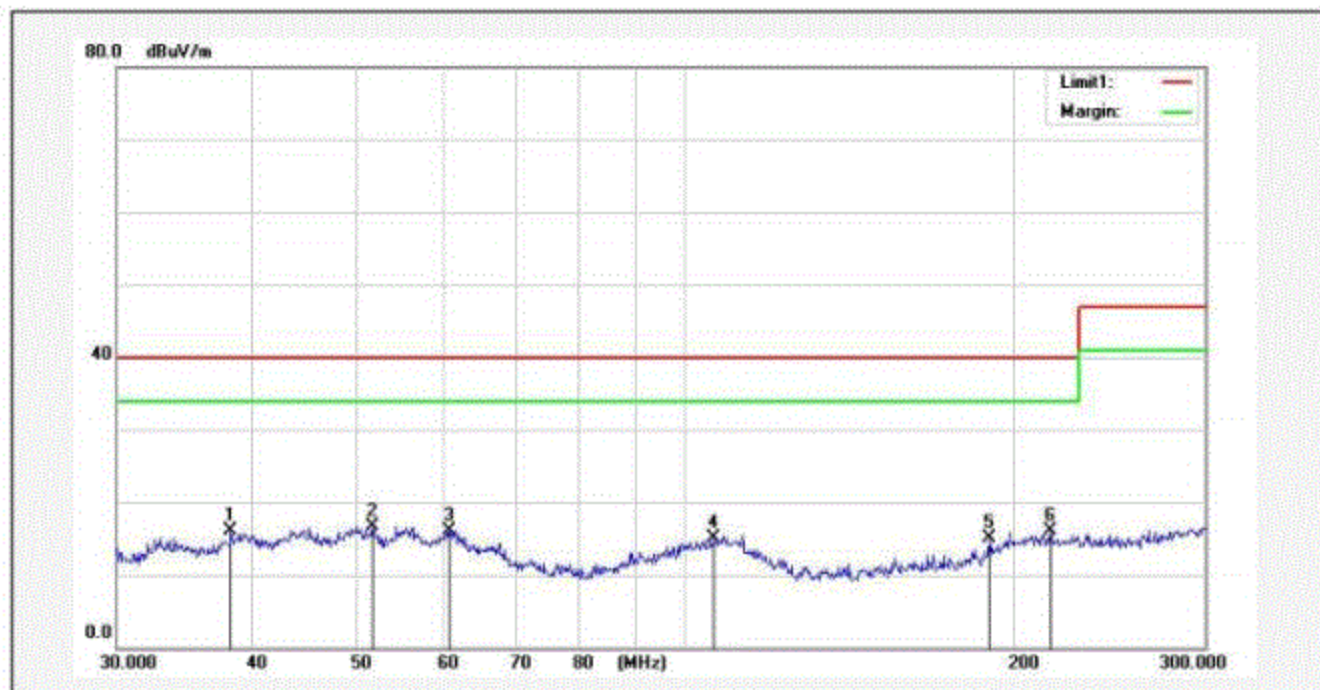


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	38.2051	33.47	-17.40	16.07	40.00	-23.93			peak
2	51.5373	33.30	-16.50	16.80	40.00	-23.20			peak
3	60.6906	33.24	-17.09	16.15	40.00	-23.85			peak
4	105.9550	32.99	-17.94	15.05	40.00	-24.95			peak
5	190.1610	34.81	-19.71	15.10	40.00	-24.90			peak
6	216.3322	33.88	-17.87	16.01	40.00	-23.99			peak

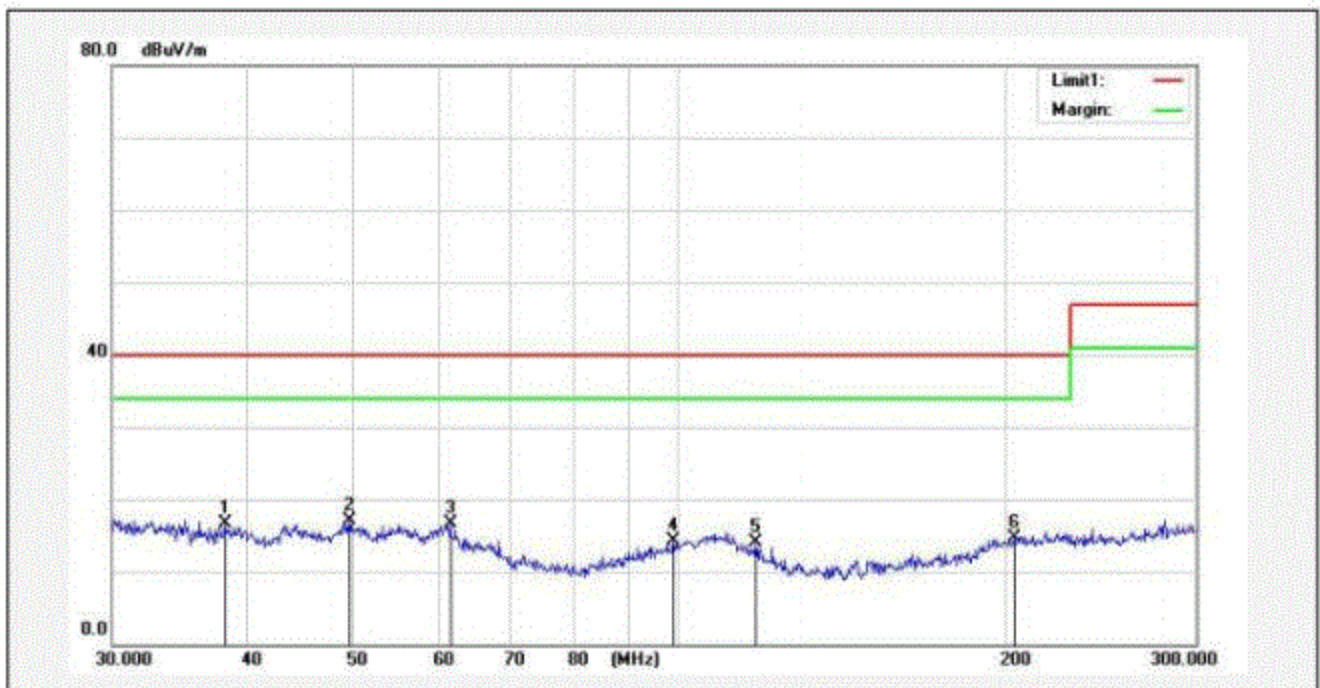

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	38.1172	56.99	-40.24	16.75	40.00	-23.25			peak
2	49.6731	57.37	-40.24	17.13	40.00	-22.87			peak
3	61.5350	57.03	-40.24	16.79	40.00	-23.21			peak
4	98.8830	54.59	-40.24	14.35	40.00	-25.65			peak
5	117.7935	54.41	-40.24	14.17	40.00	-25.83			peak
6	203.7611	54.90	-40.24	14.66	40.00	-25.34			peak

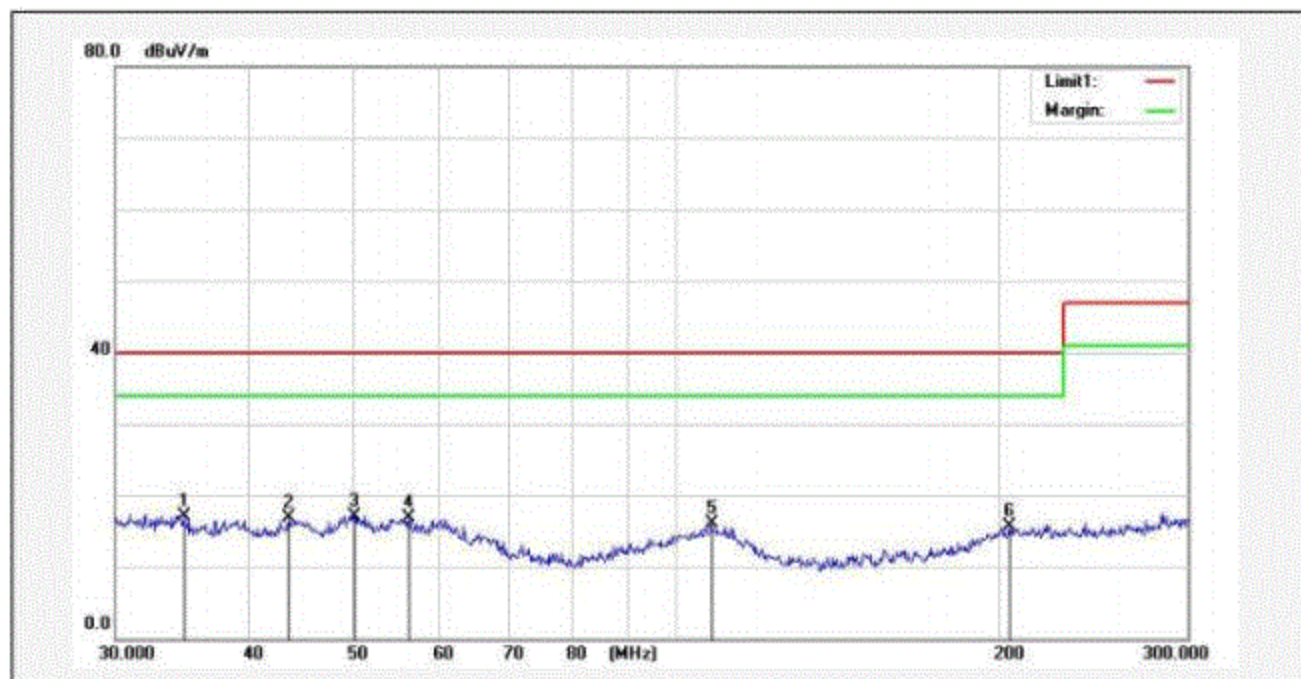

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	34.7633	35.24	-18.09	17.15	40.00	-22.85			peak
2	43.5633	33.72	-16.83	16.89	40.00	-23.11			peak
3	50.1327	33.64	-16.45	17.19	40.00	-22.81			peak
4	56.3795	33.69	-16.70	16.99	40.00	-23.01			peak
5	107.9248	33.76	-17.75	16.01	40.00	-23.99			peak
6	204.7016	33.71	-17.92	15.79	40.00	-24.21			peak

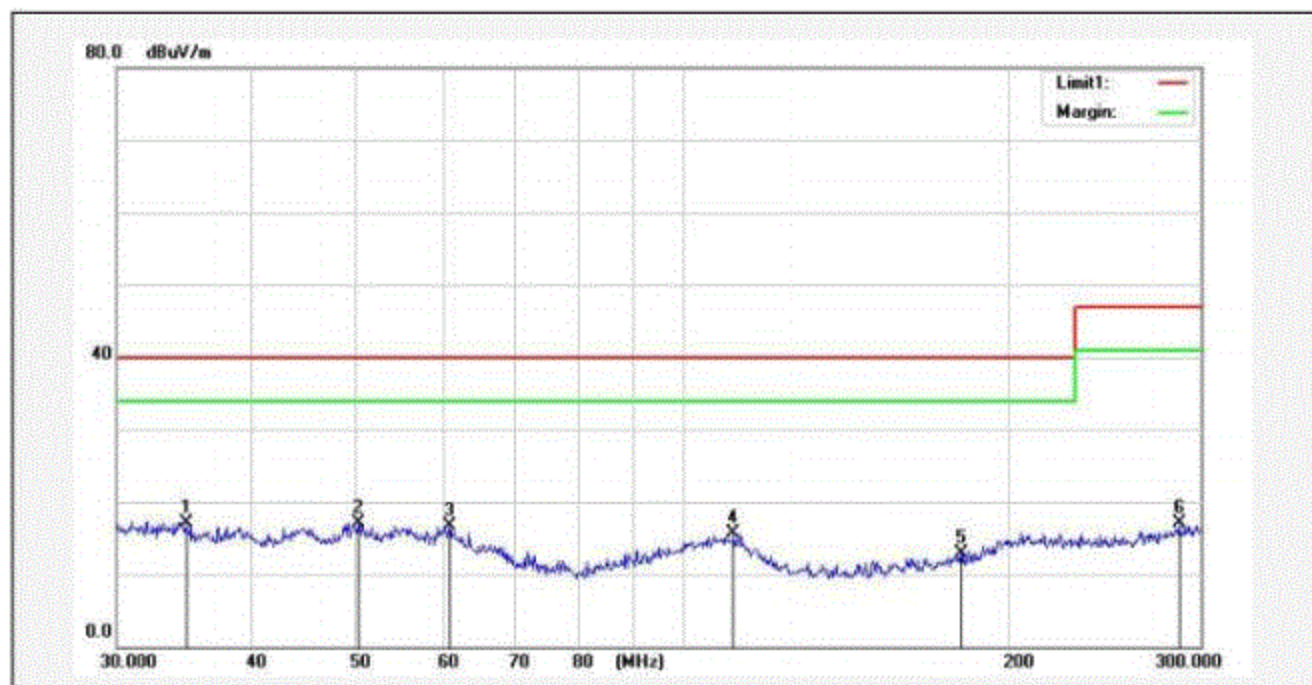

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	34.7633	57.39	-40.24	17.15	40.00	-22.85			peak
2	50.1326	57.43	-40.24	17.19	40.00	-22.81			peak
3	60.8305	56.98	-40.24	16.74	40.00	-23.26			peak
4	111.2042	55.86	-40.24	15.62	40.00	-24.38			peak
5	180.3521	53.16	-40.24	12.92	40.00	-27.08			peak
6	286.4978	57.36	-40.24	17.12	47.00	-29.88			peak




APPENDIX IV








Photo 1 General Appearance of the EUT




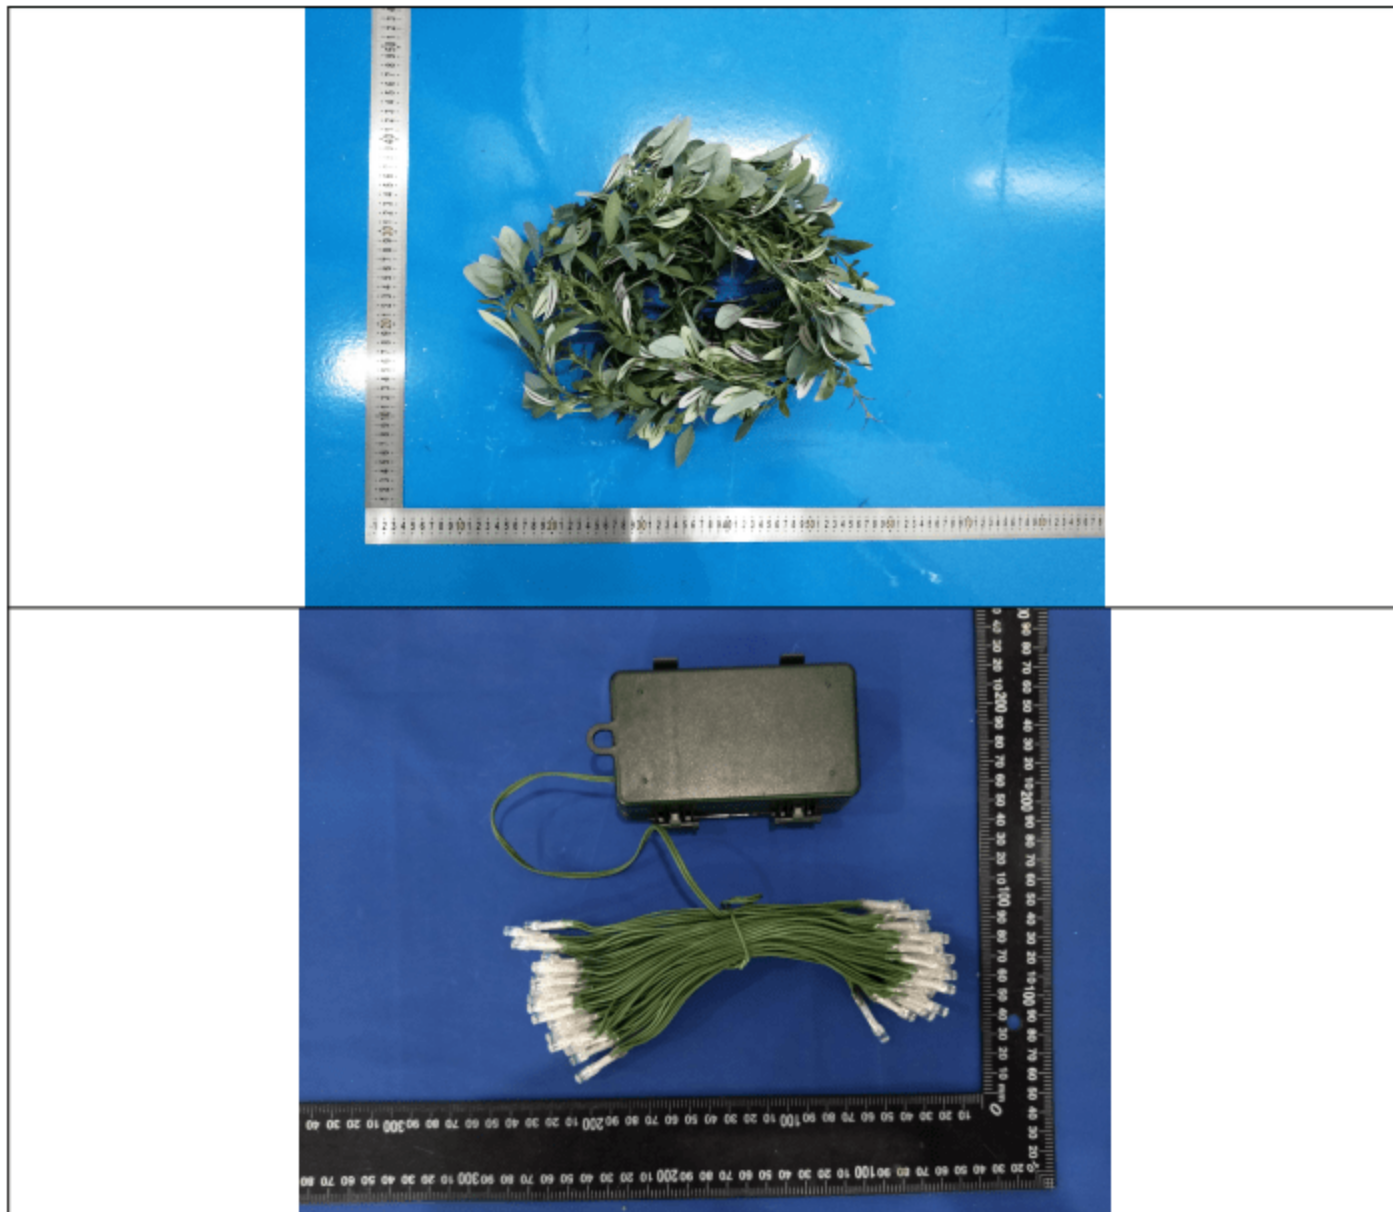


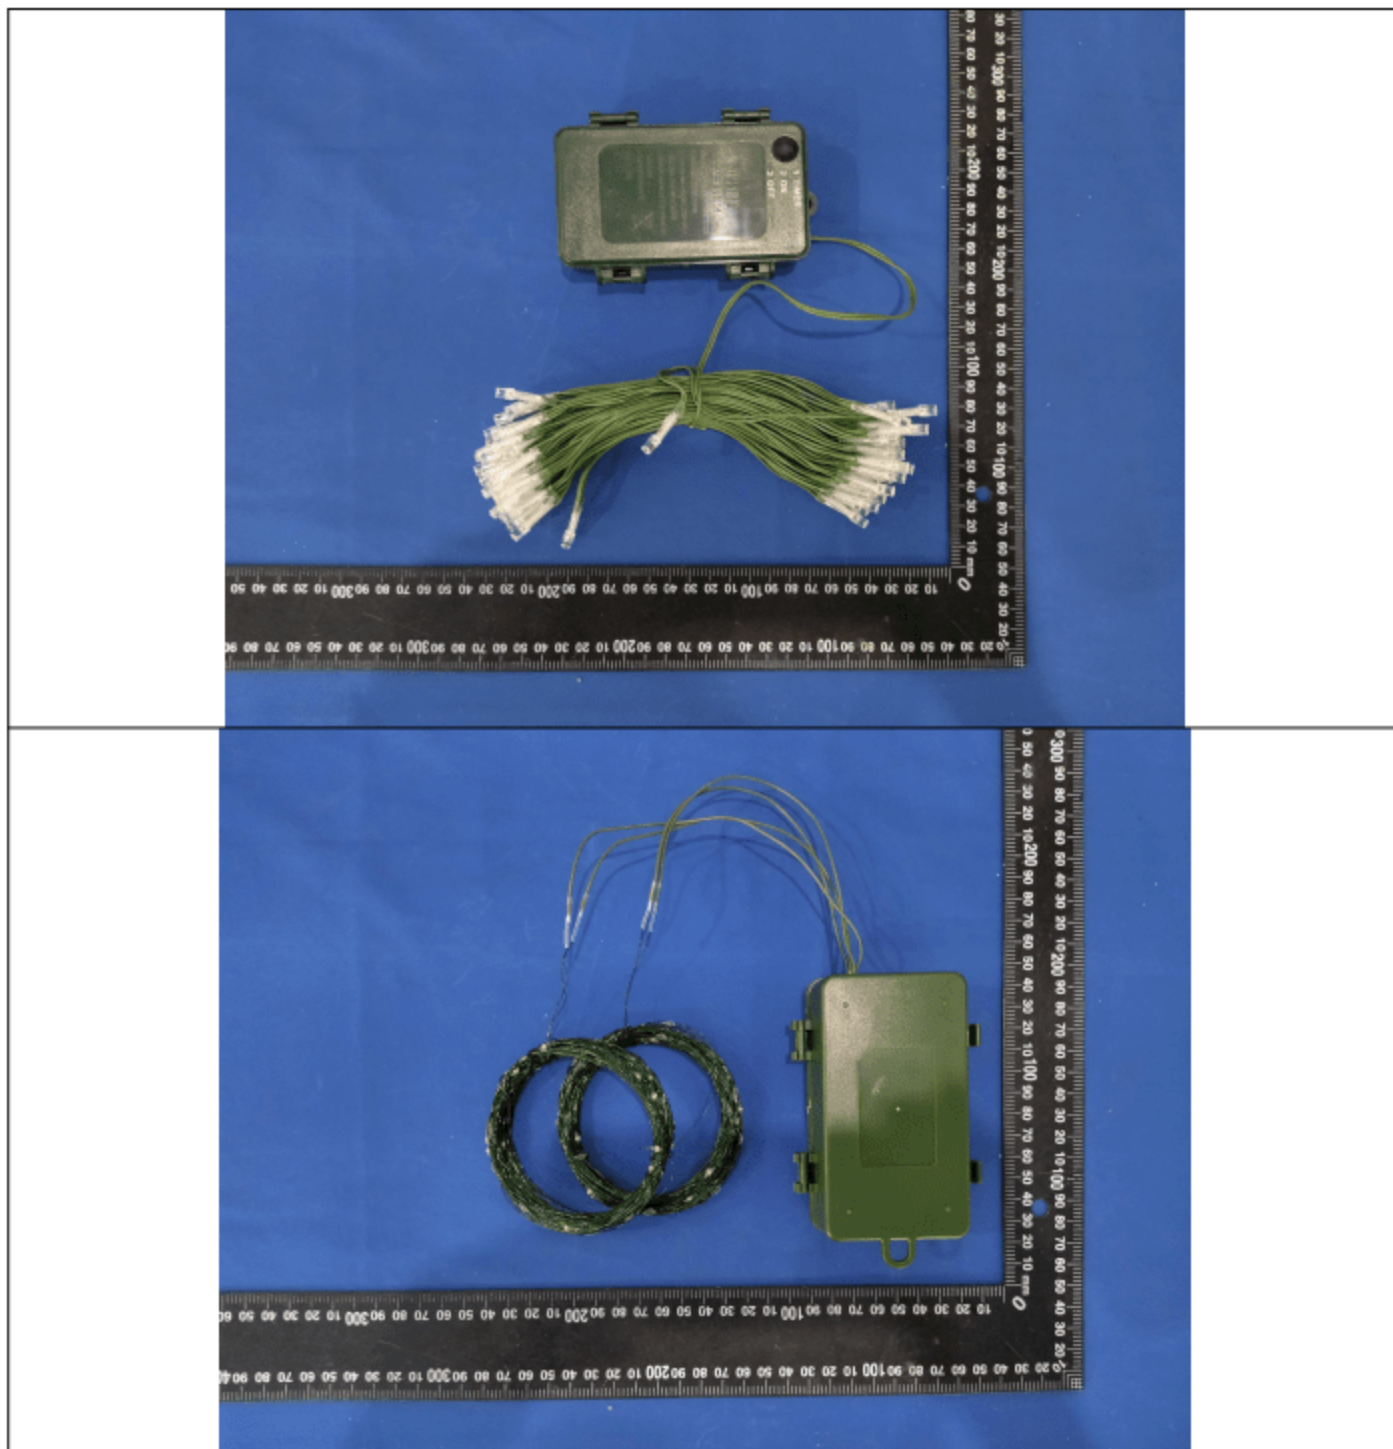

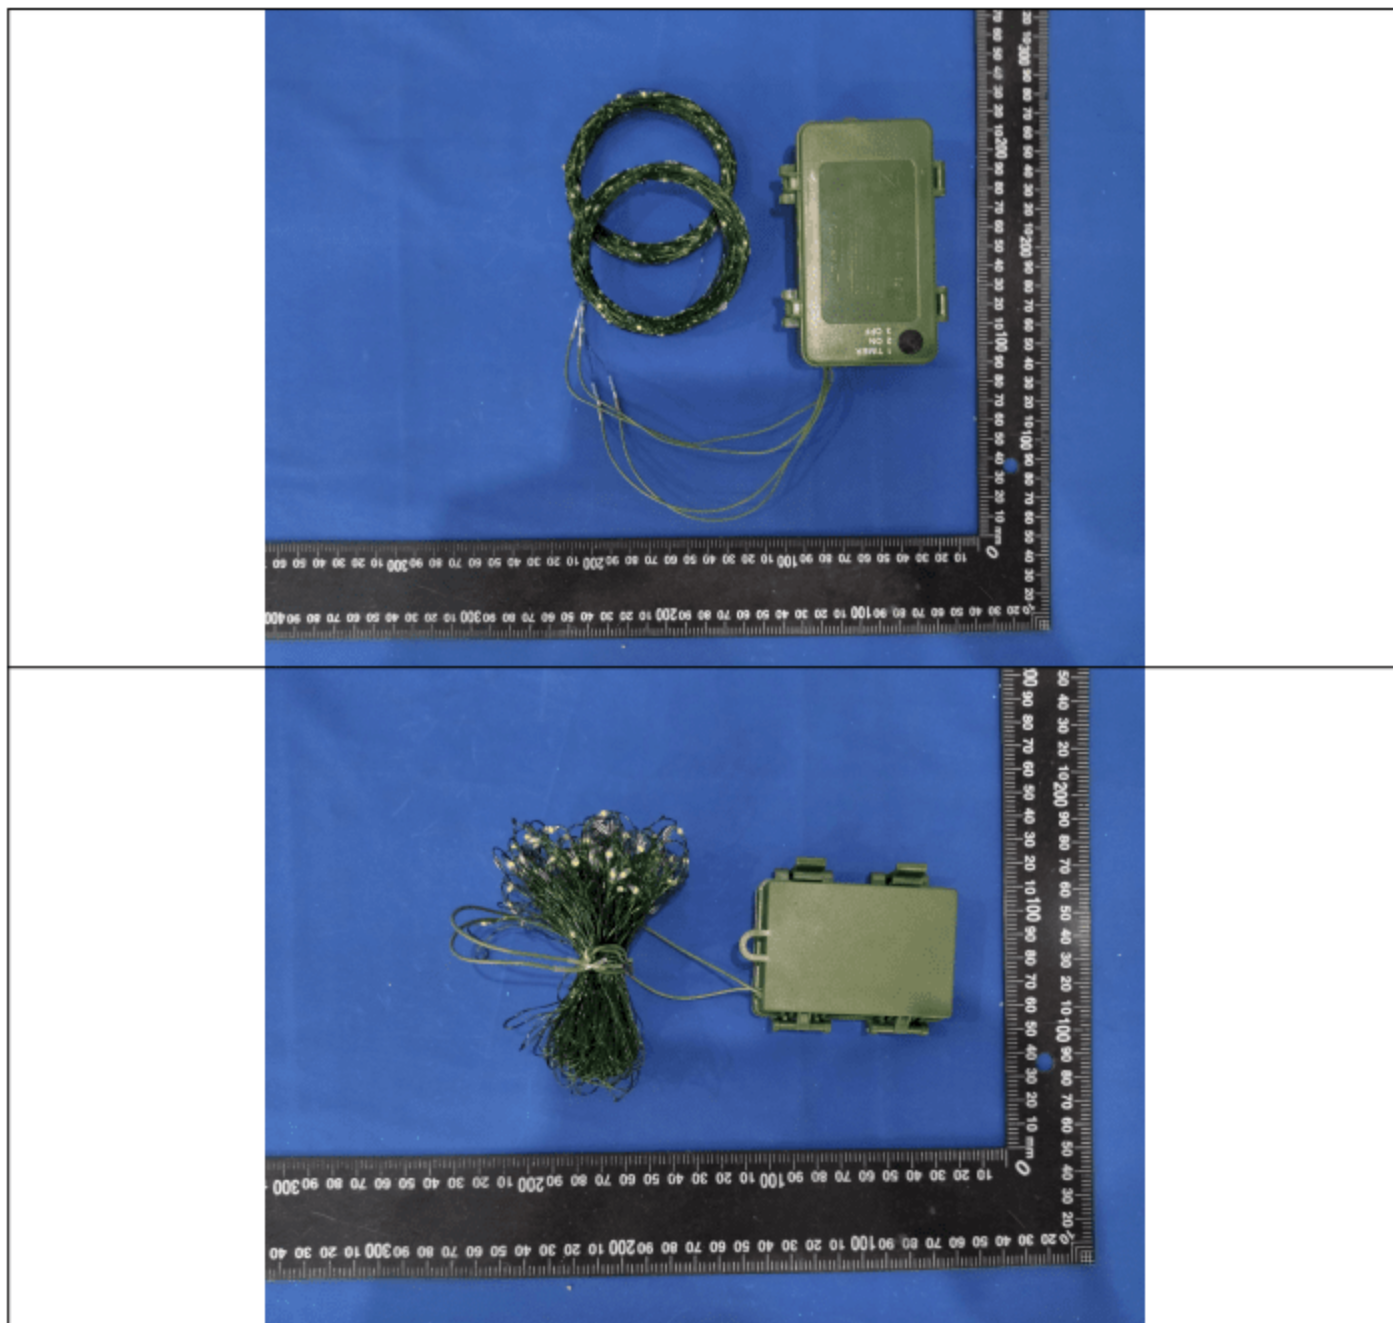

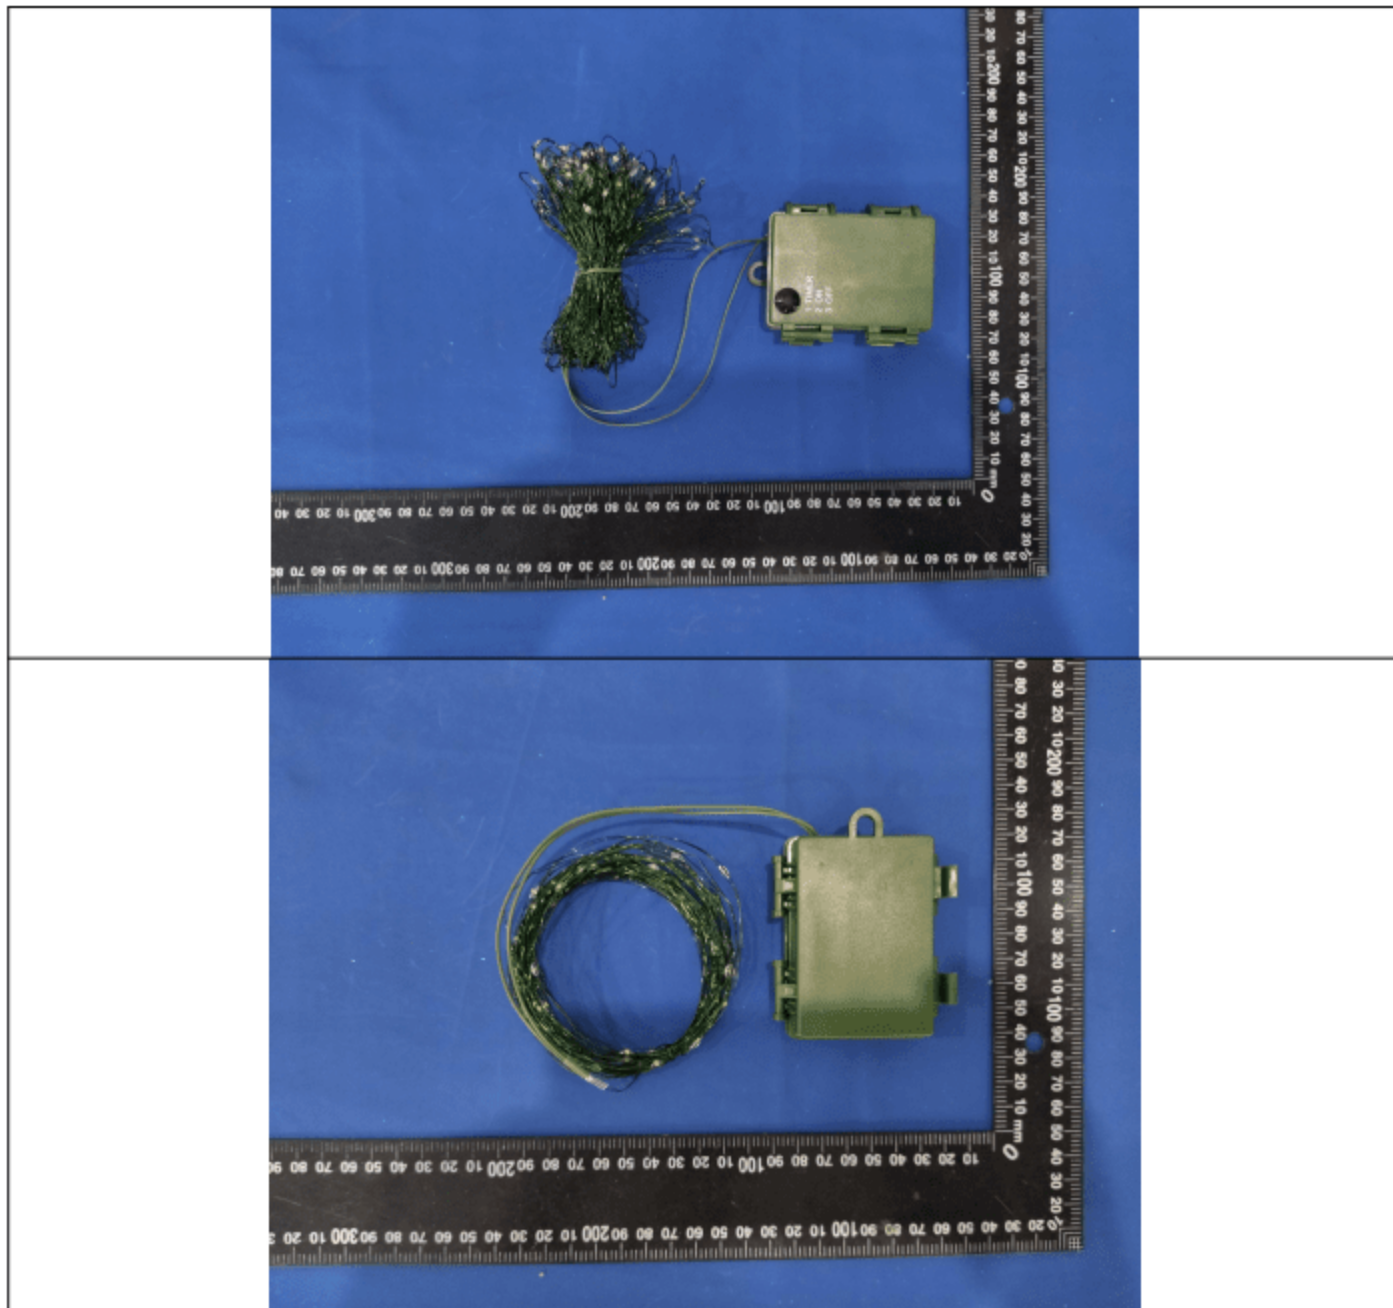

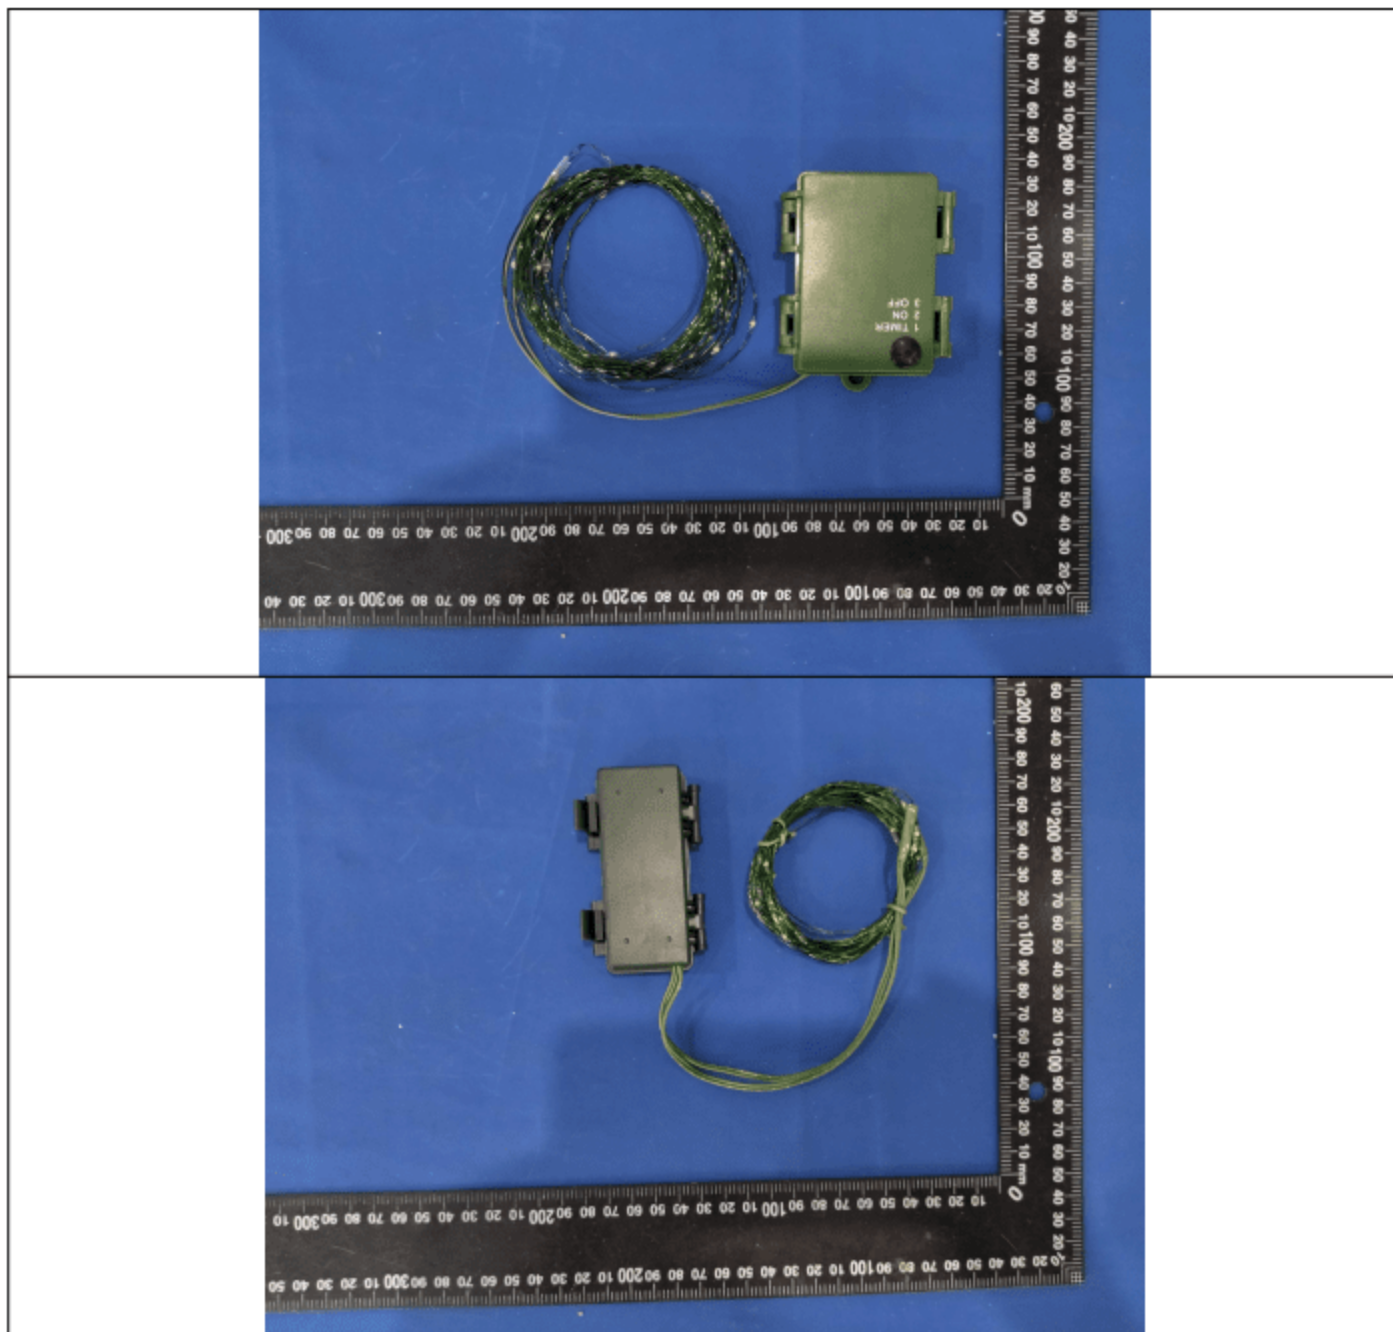

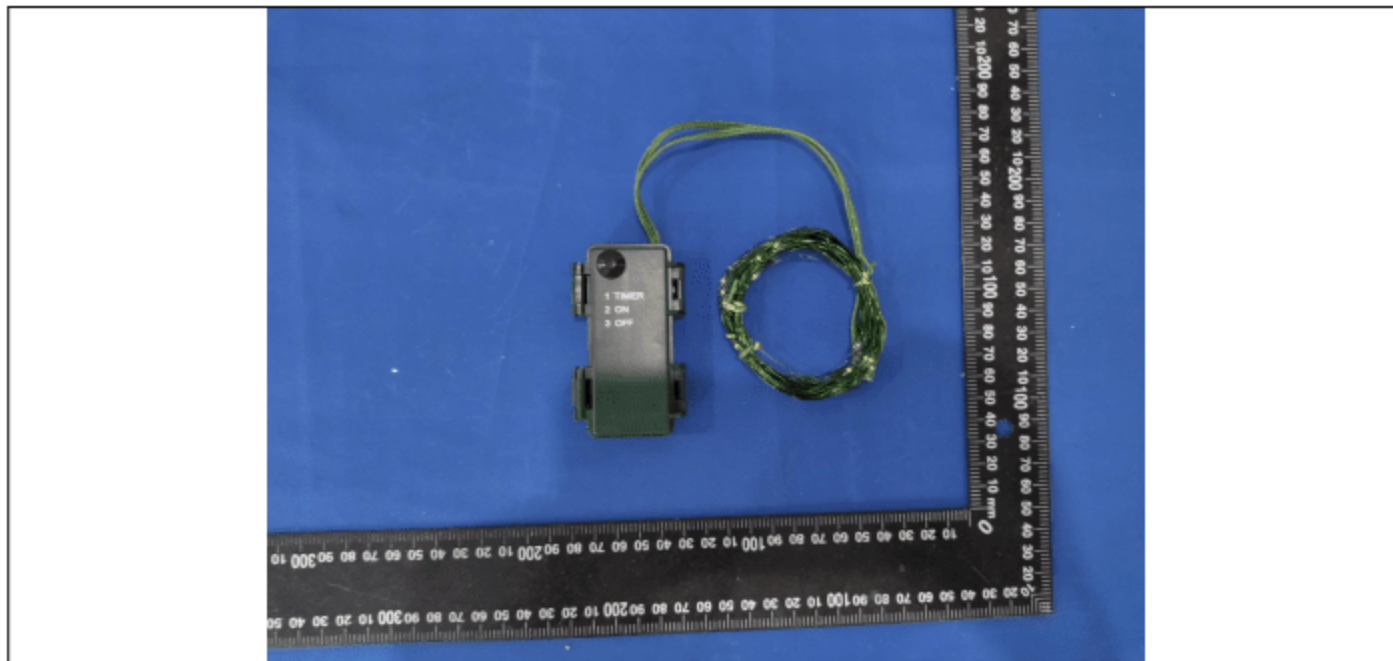

*** The End of Report ***