
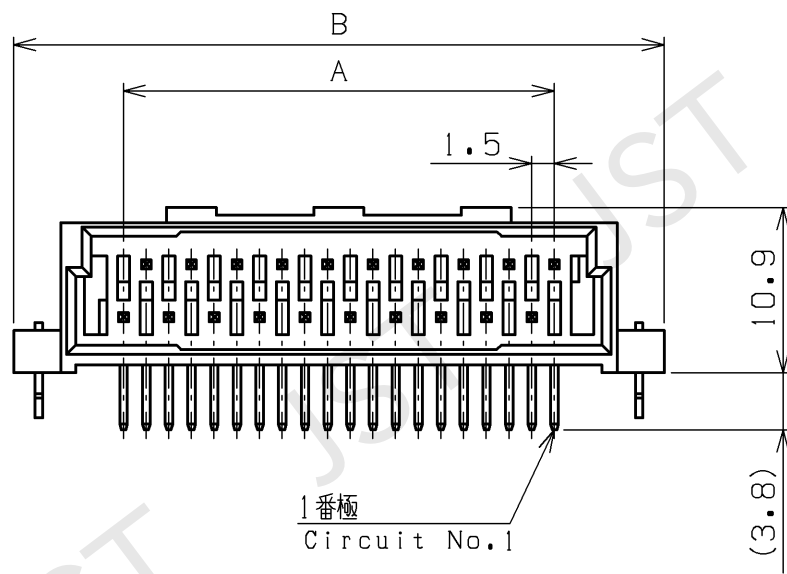


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR ADAPTED, COPIED, OR PUBLISHED WITHOUT WRITTEN PERMISSION. IN THE EVENT THAT THERE ARISE ANY DOUBTS OR CONTROVERSIES BETWEEN JAPANESE AND ENGLISH EXPRESSION, THE JAPANESE TEXT SHALL PREVAIL.

A
B
C
D
E

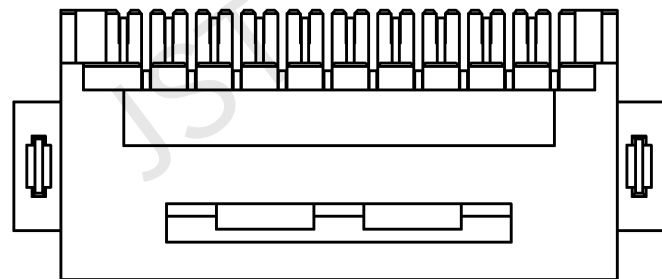


NOTE
1. 指定公差: 0<L≤5.0 : ±0.3
5.0<L : ±0.4


NOTE
1. Unless otherwise specified
tolerances are 0<L≤5.0:±0.3
5.0<L :±0.4

極数 Circuits	寸法 Dimensions		
	A	B	C
20	28.5	43.0	39.7

コネクタ外形
Connector outline

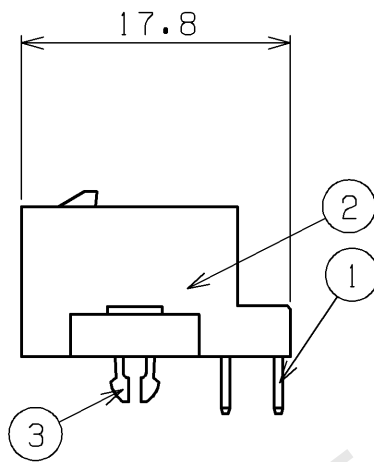

改訂 REV.	変更事項 DESCRIPTIONS	年月日 DATE	
△			0

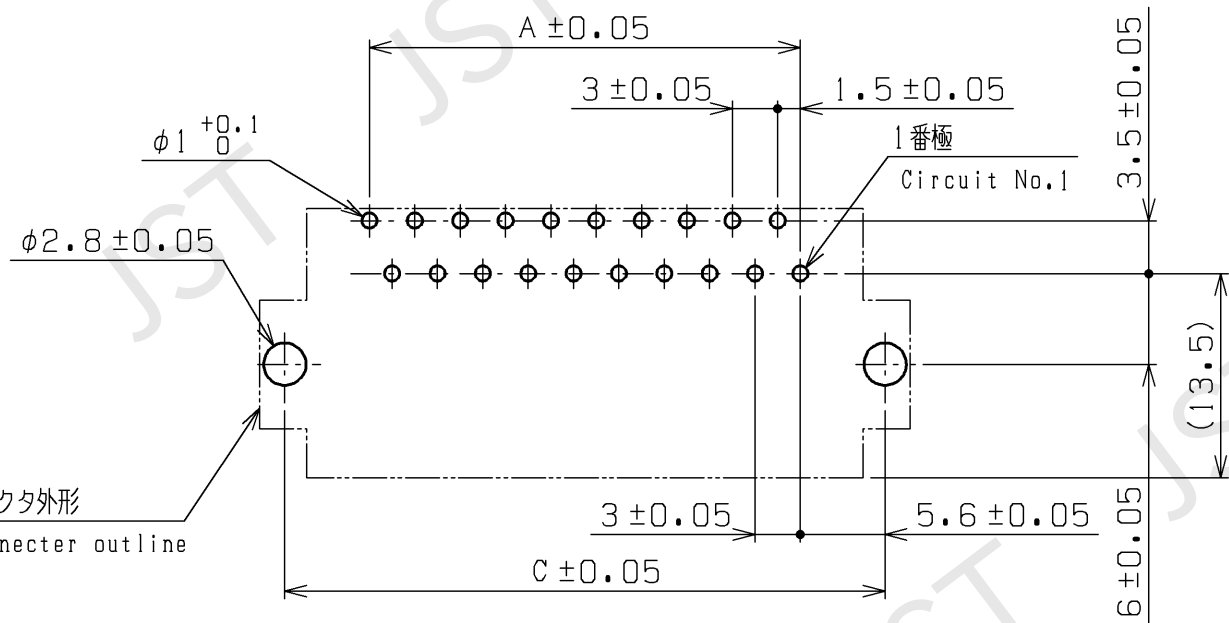

推奨基板穴寸法 (コネクタ装着側から見た図)
基板厚: t = 1.6
Recommendable P.C.Board hole layout
(The figure viewed from connector mounting side.)
P.C.Board thickness: t = 1.6

3	補強金具 REINFORCEMENT	銅合金 COPPER ALLOY	すずめっき TIN PLATED	
2	ハウジング HOUSING	PBT (GF強化) PBT (GF)		UL94V-0, ナチュラル NATURAL
1	コンタクト CONTACT	銅合金 COPPER ALLOY	部分金めっき SELECTIVE GOLD-PLATED	
品番 No.	部品名 PART NAME	材質 MATERIAL	処理 SURFACE FINISH	備考 REMARKS
サイズ SIZE	単位 UNIT	投影法 PROJECTION	作図年月日 DATE	納入先 CUSTOMER
A3	METRIC		MAY.17.2024	
日本圧着端子製造株式会社 J.S.T.MFG.CO.,LTD.				品名 SERIES NAME
				JDV コネクタ JDV CONNECTOR
				形番 PART No.
				JDV-PS()LB-10A (LF) (SN)
				図番 DRAWING No.
				KRD-35299-2 R0