

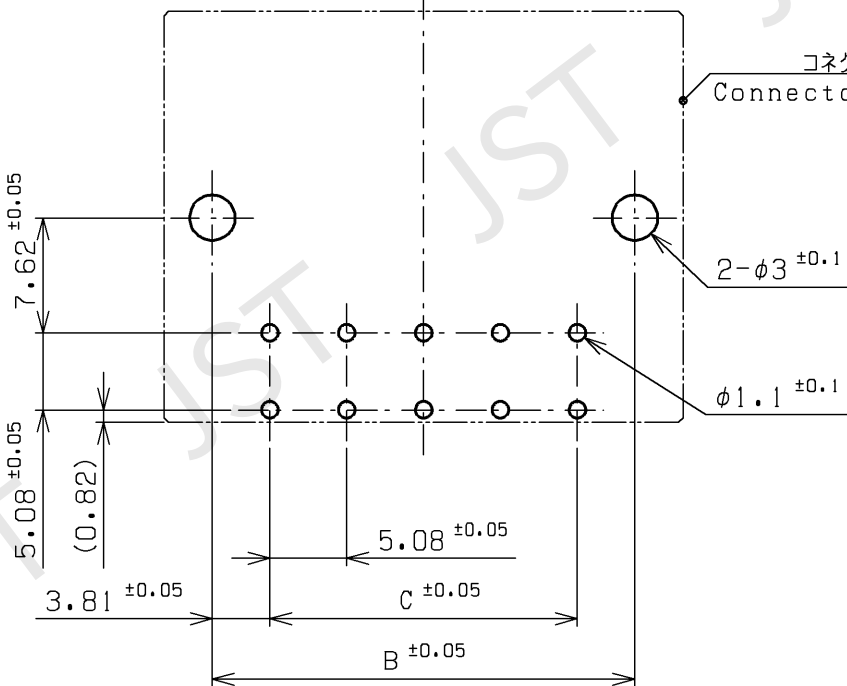
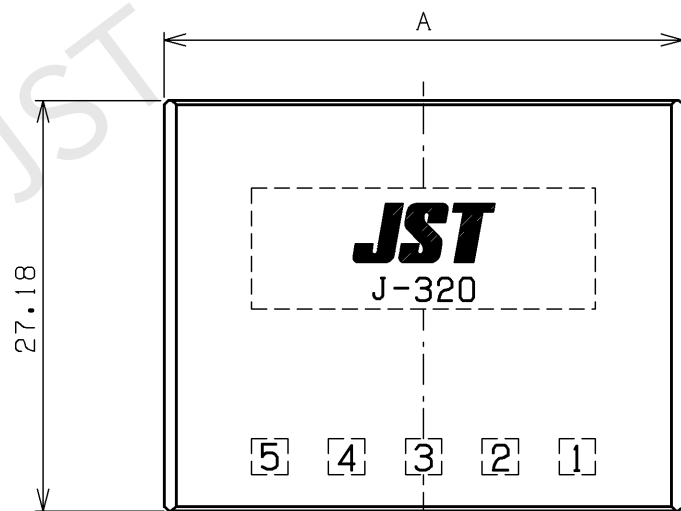


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR ADAPTED, COPIED, OR PUBLISHED WITHOUT WRITTEN PERMISSION. IN THE EVENT THAT THERE ARISE ANY DOUBTS OR CONTROVERSIES BETWEEN JAPANESE AND ENGLISH EXPRESSION, THE JAPANESE TEXT SHALL PREVAIL.

A
B
C
D
E
F

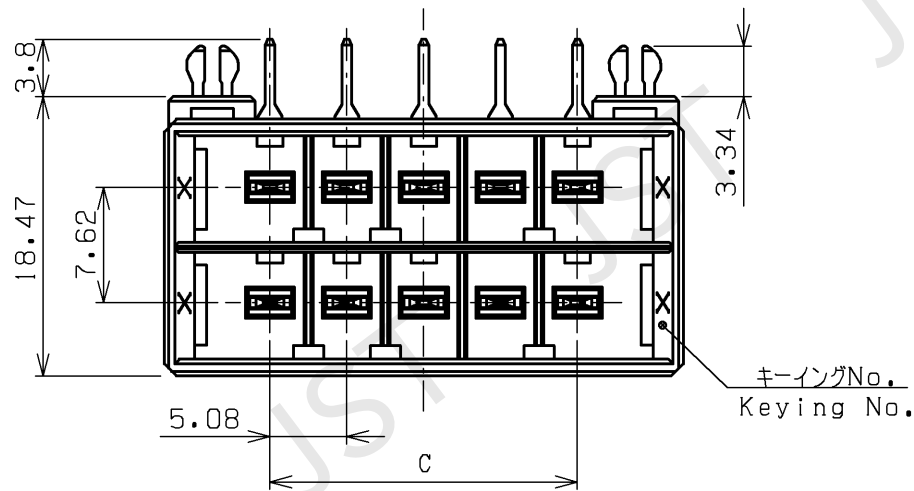

推奨基板穴寸法 (コネクタ装着側)
Recommendable P.C. Board hole layout
(connector mounted side)

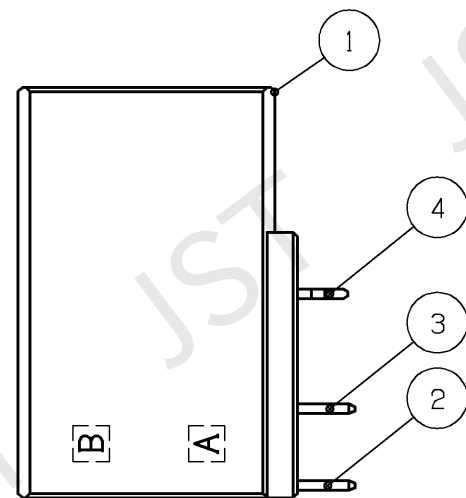

NOTE

1. 指定公差: ±0.5
2. 基板の穴ピッチの公差は累積しないこと

NOTE

1. Unless otherwise specified, tolerances are ±0.5
2. Tolerance of hole pitch on P.C. Board are not cumulative.

形番表

Table of part number

極数 Circuits	寸法/Dimension			キーイング No. Keying No.	キーイング形状 Configuration of keying	形番 Part No.
	A	B	C			
6P	24.16	17.78	10.16	XX		S06B-F32MK-GGXXR (LF) (AU)
				YY		S06B-F32MK-GGYR (LF) (AU)
				XY		S06B-F32MK-GGXYR (LF) (AU)
8P	29.24	22.86	15.24	XY		S08B-F32MK-GGXYR (LF) (AU)
10P	34.32	27.94	20.32	XX		S10B-F32MK-GGXXR (LF) (AU)
				YY		S10B-F32MK-GGYR (LF) (AU)
				XY		S10B-F32MK-GGXYR (LF) (AU)
12P	39.40	33.02	25.40	XX		S12B-F32MK-GGXXR (LF) (AU)
				YY		S12B-F32MK-GGYR (LF) (AU)
				XY		S12B-F32MK-GGXYR (LF) (AU)

4	補強金具 REINFORCEMENT	銅合金 COPPER ALLOY	部分金めっき SELECTIVE GOLD PLATED	
3	タブコンタクト (A列) TAB CONTACT (A ROW)	銅合金 COPPER ALLOY	部分金めっき SELECTIVE GOLD PLATED	
2	タブコンタクト (B列) TAB CONTACT (B ROW)	銅合金 COPPER ALLOY	部分金めっき SELECTIVE GOLD PLATED	
1	ヘッダーハウジング HEADER HOUSING	PBT (GF強化) PBT (GF)		黒 BLACK
品番 No.	部品名 PART NAME	材質 MATERIAL	処理 SURFACE FINISH	備考 REMARKS
サイズ SIZE	単位 UNIT	投影法 PROJECTION	作図年月日 DATE	納入先 CUSTOMER
A3	METRIC		MAR.28.2024	品名 SERIES NAME
JST 日本圧着端子製造株式会社 J.S.T. MFG.CO.,LTD.				JFAコネクタ J320Mシリーズ サイドヘッダー 金めっき JFA CONNECTOR J320M SERIES SIDE HEADER GOLD PLATED
				形番 PART No.
				図番 DRAWING No.
				尺度 SCALE
				2:1
				形番表参照 REFER TABLE OF PART NUMBER
				KRD-35239-3
				R0