


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR ADAPTED, COPIED, OR PUBLISHED WITHOUT WRITTEN PERMISSION. IN THE EVENT THAT THERE ARISE ANY DOUBTS OR CONTROVERSIES BETWEEN JAPANESE AND ENGLISH EXPRESSION, THE JAPANESE TEXT SHALL PREVAIL.

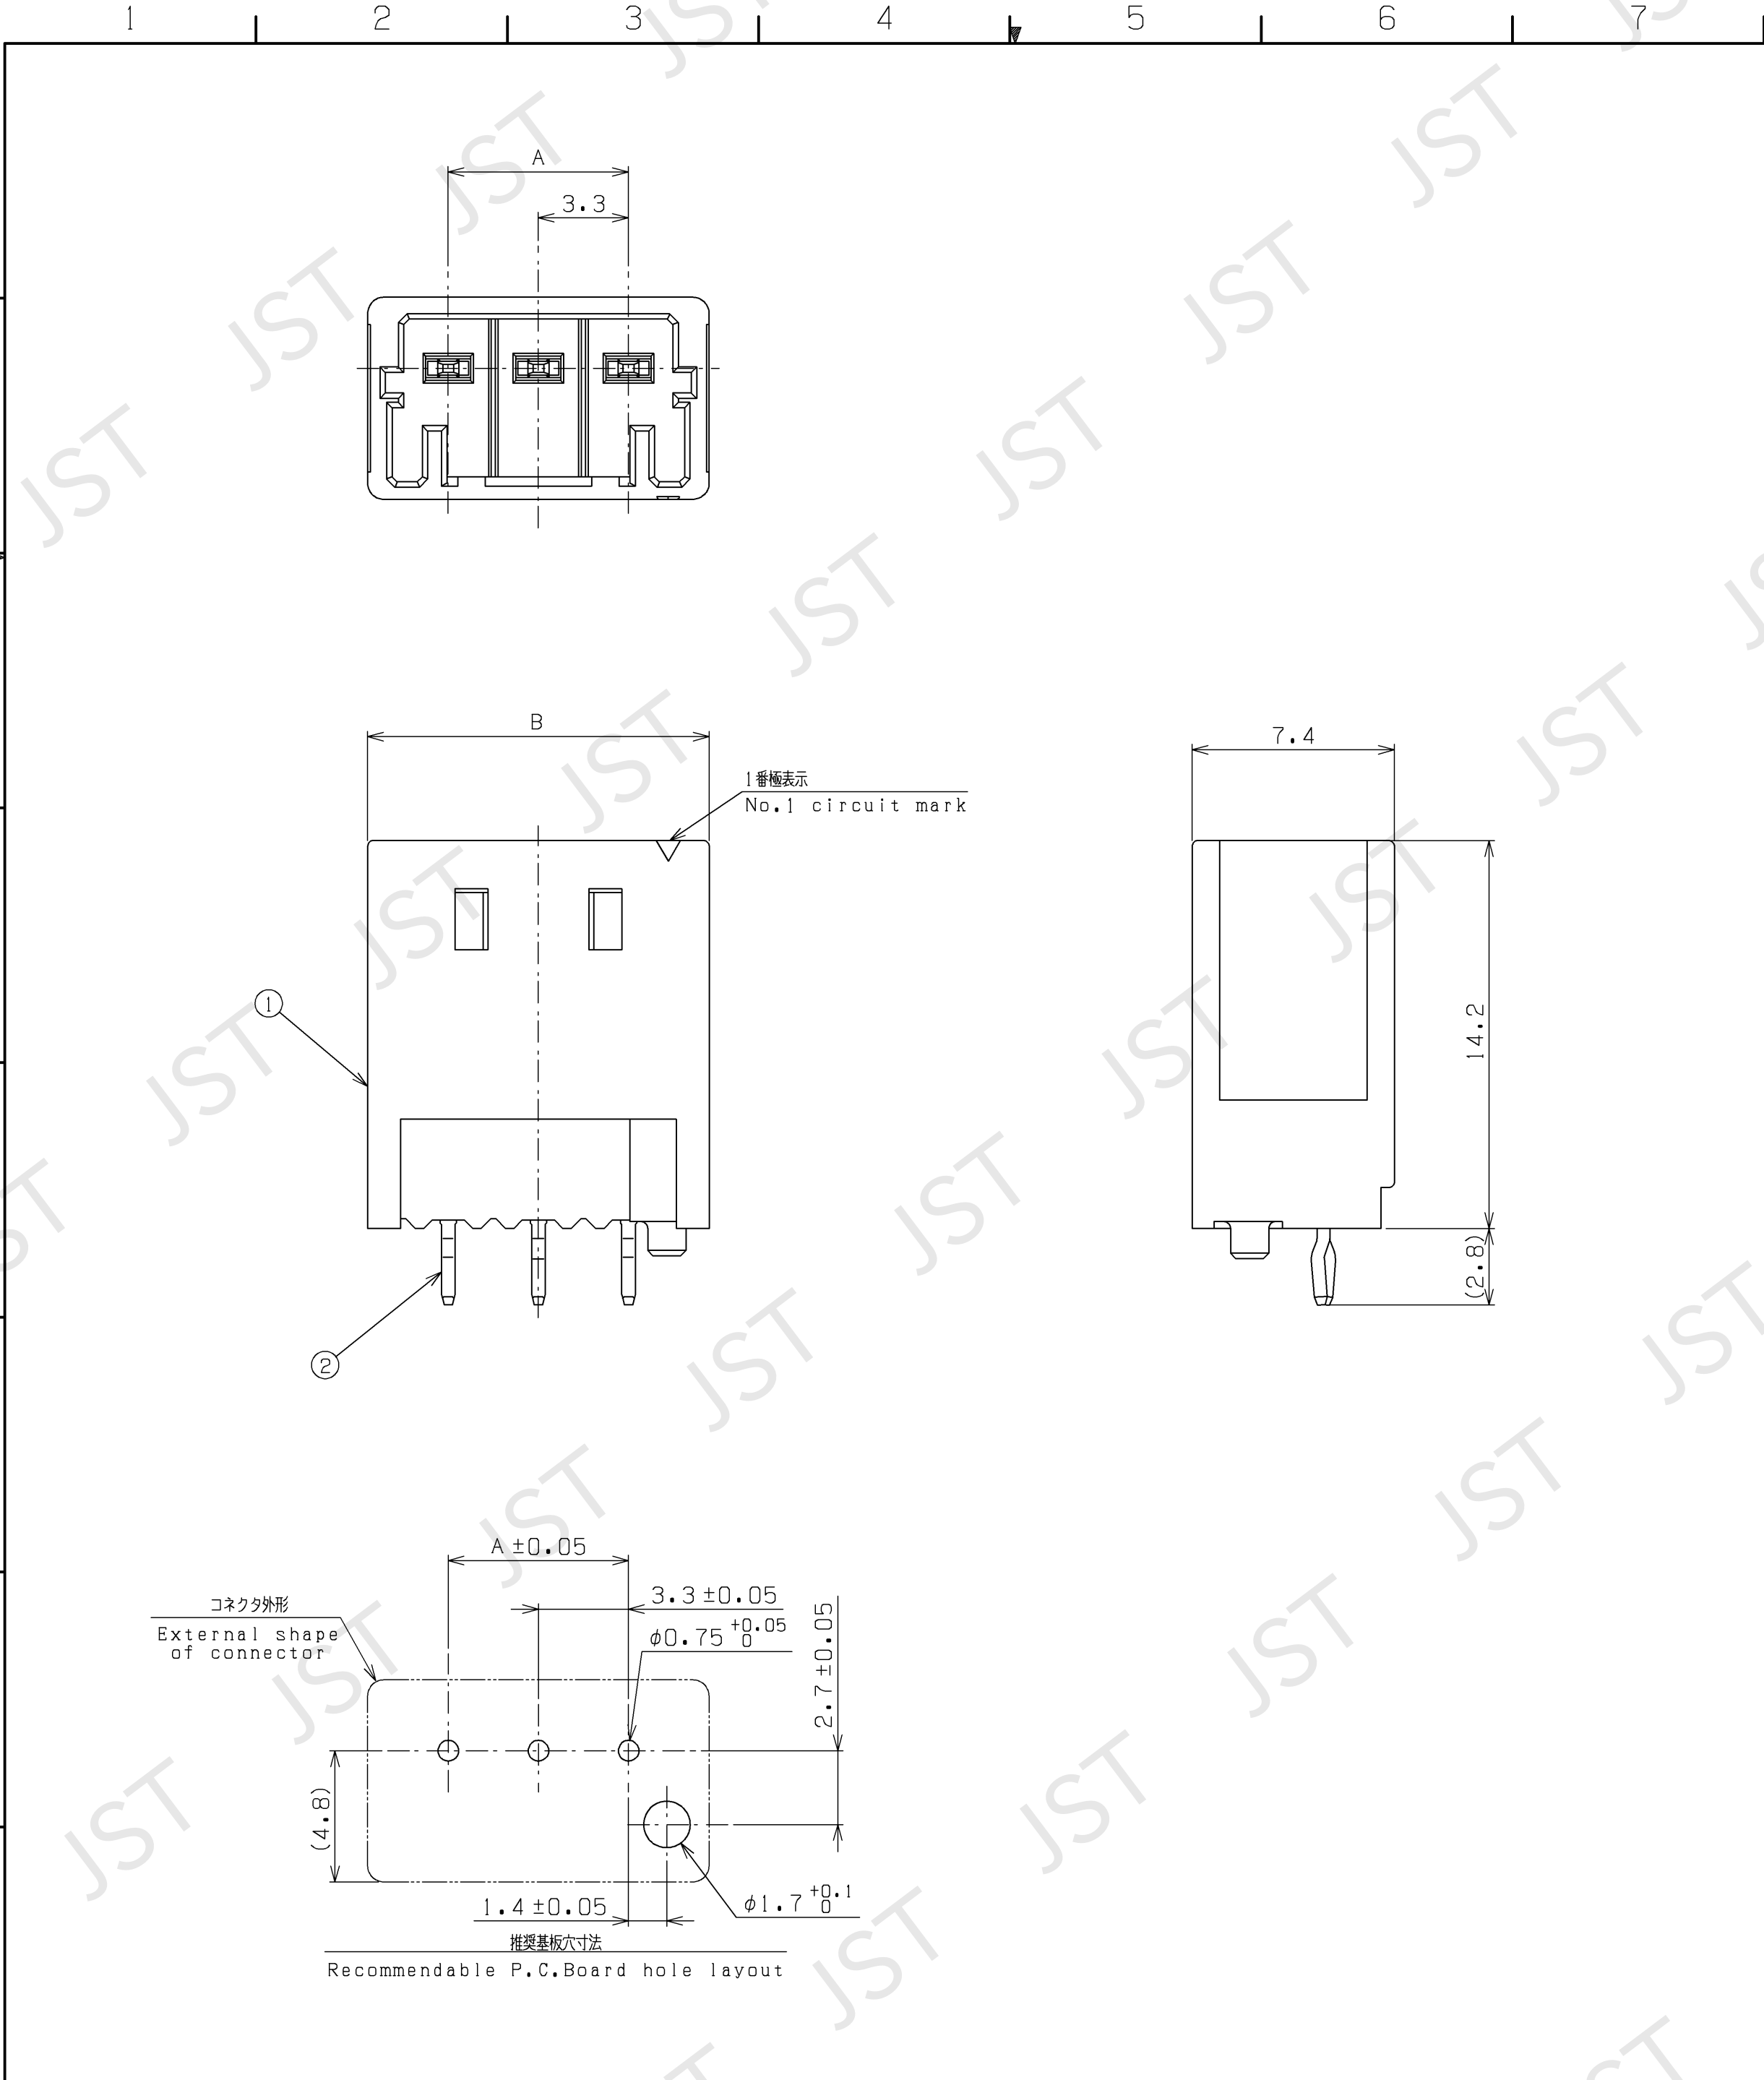



改訂 REV.	変更事項 DESCRIPTIONS	年月日 DATE	
△			0

NOTE

1. 指定公差 : $0 < L \leq 3.0 : \pm 0.3$
 $3.0 < L : \pm 0.4$
2. 形番: B () B-BNI () K- () - ()
- 極数 (Circuits) 色 (Colors) 無: ボス無 (Null: Without boss)
1: ボス有 (1: With boss)

NOTE

1. Unless otherwise specified, tolerances are $0 < L \leq 3.0 : \pm 0.3$
 $3.0 < L : \pm 0.4$
2. Part No: B () B-BNI () K- () - ()
- Circuits Colors Null: Without boss
Polarizing key Pattern 1: With boss

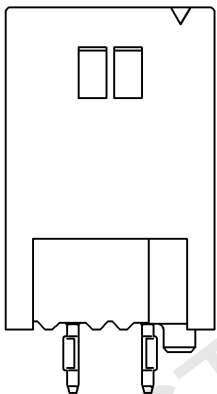

2極形状
Configuration of 2-circuits

極数 Circuits	寸法 Dimensions	
	A	B
2	-	9.2
3	6.6	12.5

極性キー Polarizing key	キーパターンA Key Pattern A	キーパターンB Key Pattern B	キーパターンC Key Pattern C
形番/Part No.	B () B-BNISK-A- ()	B () B-BNIMK-B- ()	B () B-BNIEK-C- ()
色/Colors	ナチュラル/Natural	緑/Green	青/Blue
難燃性/Flammability	UL94V-0	-	-
形状/ Configurations			

2	ベースコンタクト BASE CONTACT	銅合金 COPPER ALLOY	すずめっき TIN PLATED	
1	ベースハウジング BASE HOUSING	PA (GF強化) PA (GF)		表参照 REFER TO TABLE
品番 No.	部品名 PART NAME	材質 MATERIAL	処理 SURFACE FINISH	備考 REMARKS
サイズ SIZE	単位 UNIT	投影法 PROJECTION	作図年月日 DATE	納入先 CUSTOMER
A2	METRIC		JUN. 10, 2024	
		尺度 SCALE	品名 SERIES NAME	品名 SERIES NAME
		5:1	形番 PART No.	BNI コネクタ BNI CONNECTOR
			図番 DRAWING No.	B () B-BNI () K- () - ()
				KRD-50563-2 RO