



THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR ADAPTED, COPIED, OR PUBLISHED WITHOUT WRITTEN PERMISSION. IN THE EVENT THAT THERE ARISE ANY DOUBTS OR CONTROVERSIES BETWEEN JAPANESE AND ENGLISH EXPRESSION, THE JAPANESE TEXT SHALL PREVAIL.

A
B
C
D
E

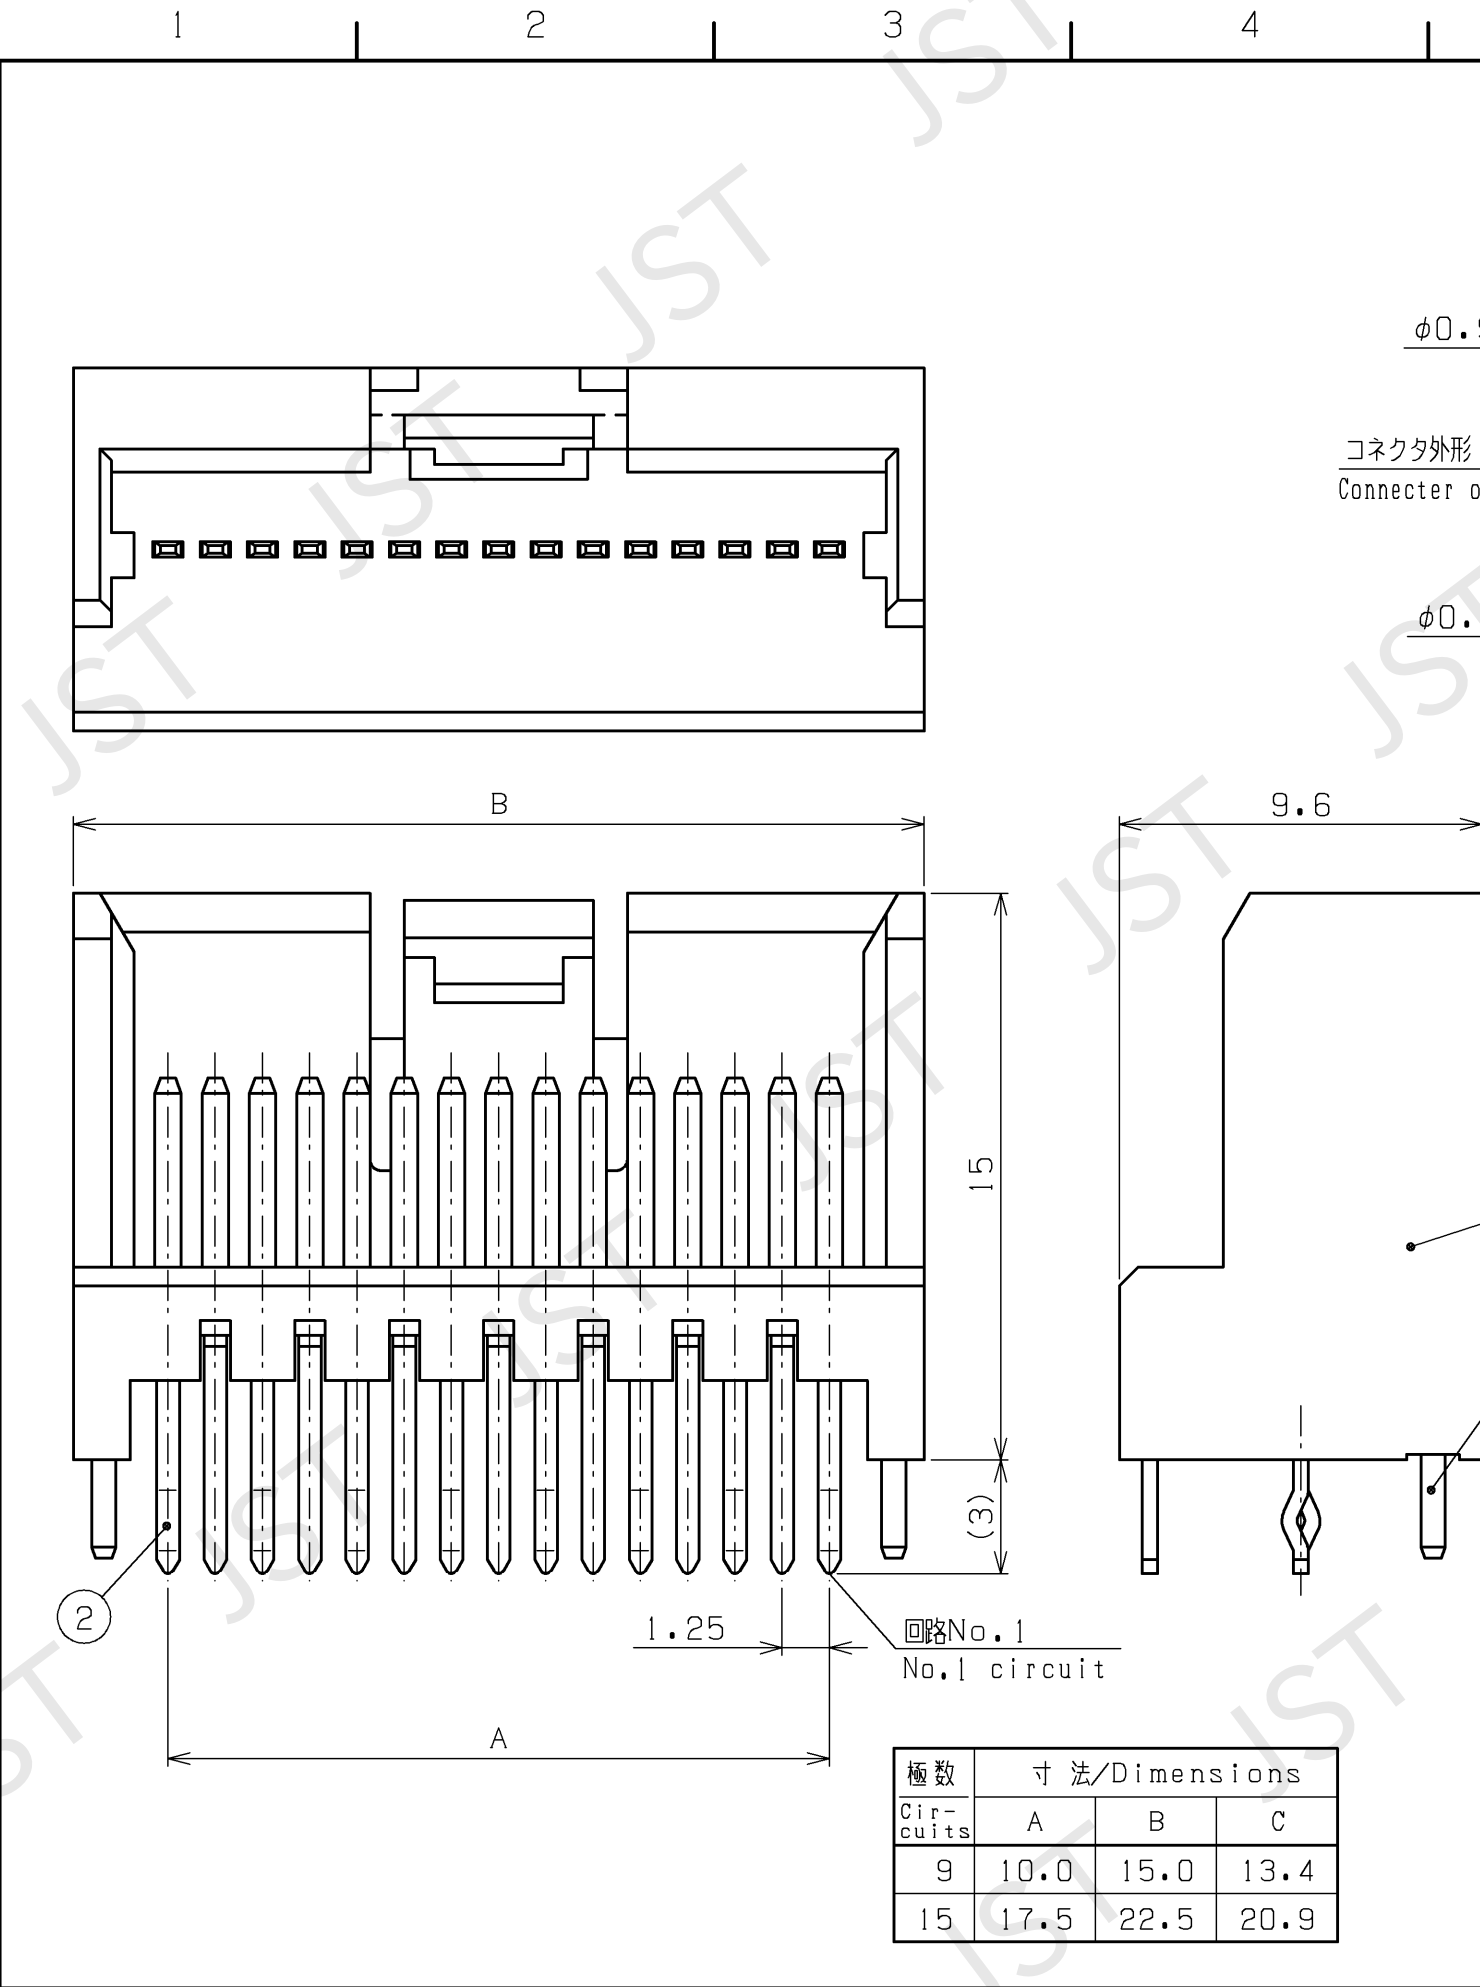

極数	寸法/Dimensions		
Cir- cuits	A	B	C
9	10.0	15.0	13.4
15	17.5	22.5	20.9

改訂 REV.	変更事項 DESCRIPTIONS	年月日 DATE	0
△			

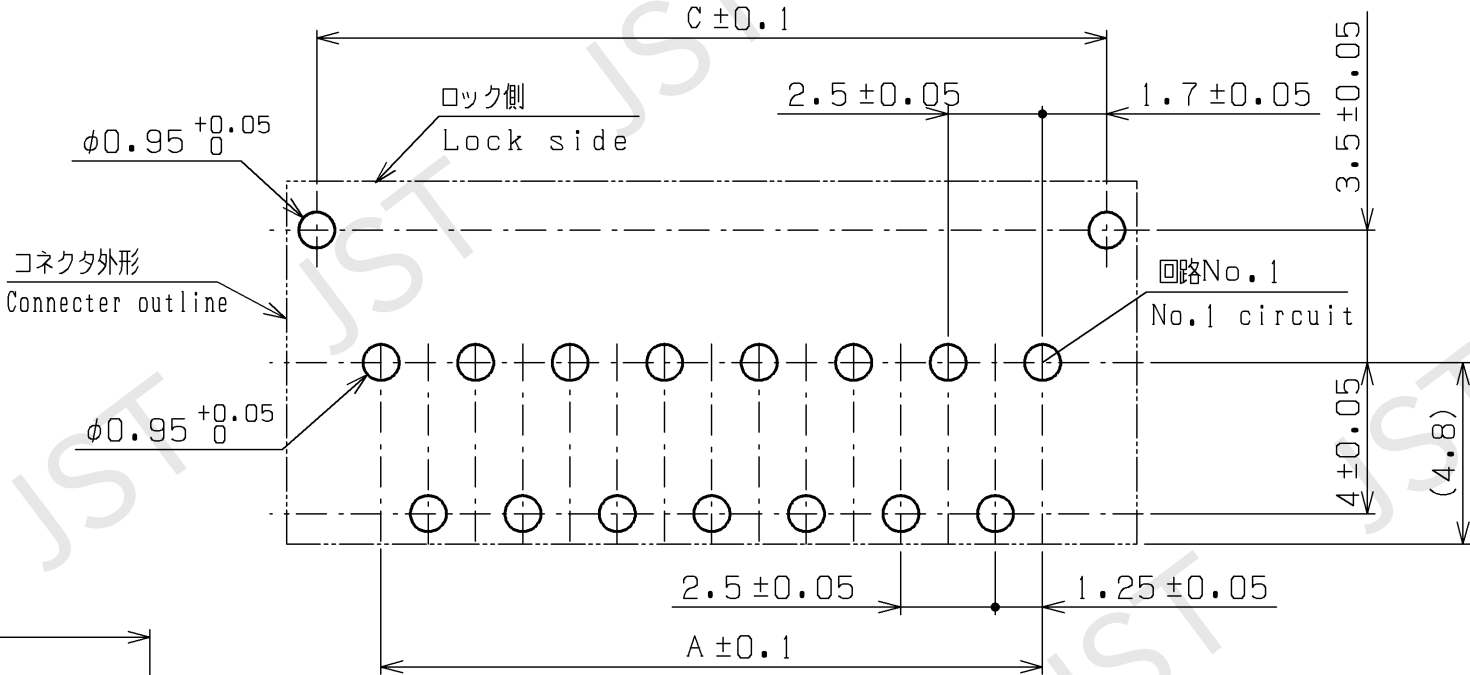

推奨基板穴寸法 (コネクタ装着側)
Recommendable P.C.Board hole layout
(The figure viewed from connector mounting side.)

- NOTE
1. 一般公差 : ± 0.3
2. 基板の穴ピッチの公差は累積しないこと。
- NOTE
1. Unless otherwise specified, tolerance are ± 0.3
2. Tolerance of hole pitch on PCB are not cumulative.

3	補強ピン REINFORCING PIN	銅合金 COPPER ALOOY	すずめっき TIN PLATED	
2	コンタクト CONTACT	銅合金 COPPER ALOOY	すずめっき TIN PLATED	
1	ハウジング HOUSING	PA (GF強化) PA (GF)		UL94V-0, ナチュラル NATURAL
品番 No.	部品名 PART NAME	材質 MATERIAL	処理 SURFACE FINISH	備考 REMARKS
サイズ SIZE	単位 UNIT	投影法 PROJECTION	作図年月日 DATE	納入先 CUSTOMER
A3	METRIC		MAR.15.2024	品名 SERIES NAME
日本圧着端子製造株式会社 J.S.T. MFG.CO., LTD.				形状 PART No.
				図番 DRAWING No.
				図番 DRAWING No.