



THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR ADAPTED, COPIED, OR PUBLISHED WITHOUT WRITTEN PERMISSION. IN THE EVENT THAT THERE ARISE ANY DOUBTS OR CONTROVERSIES BETWEEN JAPANESE AND ENGLISH EXPRESSION, THE JAPANESE TEXT SHALL PREVAIL.

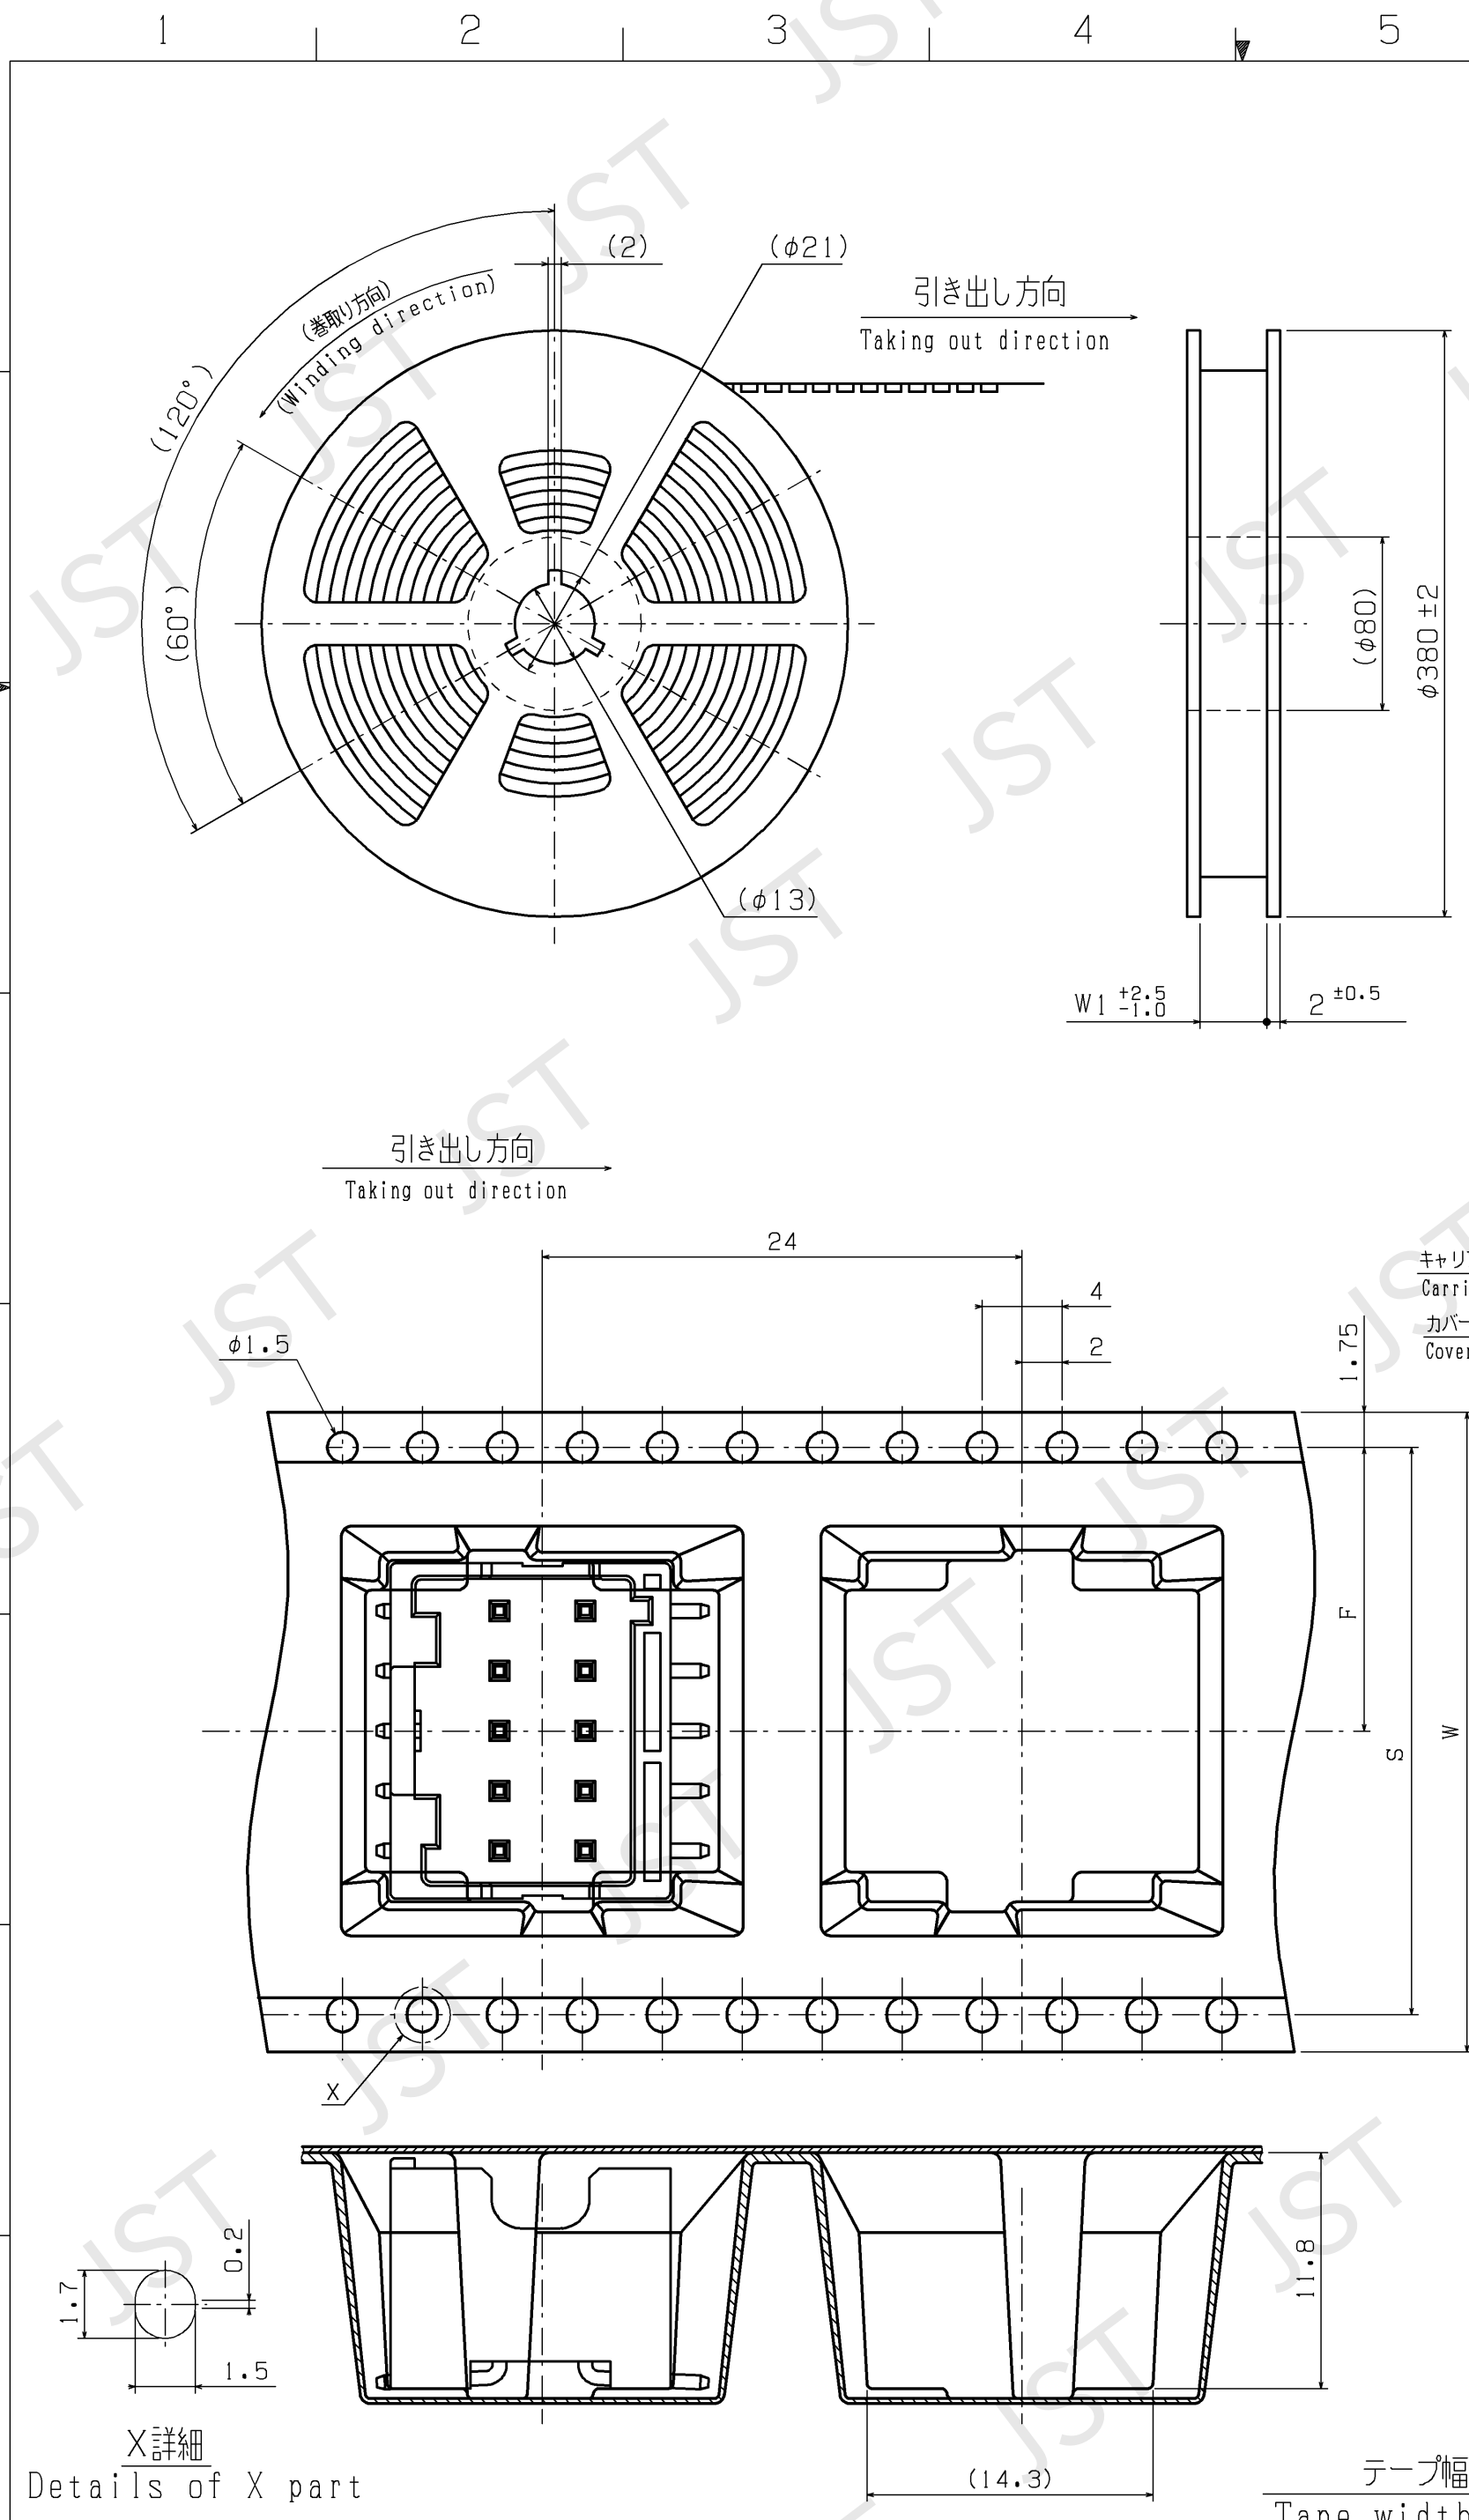


極数 Number of Circuits	寸法/Dimensions				
	B0	F	S	W	W1
04	8.1	11.5	24	25.5	25.5
06	11.1				
08	14.1				
10	17.1	14.2	28.4	32	33.5

NOTE

- 1.コネクタ本体については、単体の別図面を参照ください。
- 2.梱包数量：300個/リール
- 3.リードテープ長さ

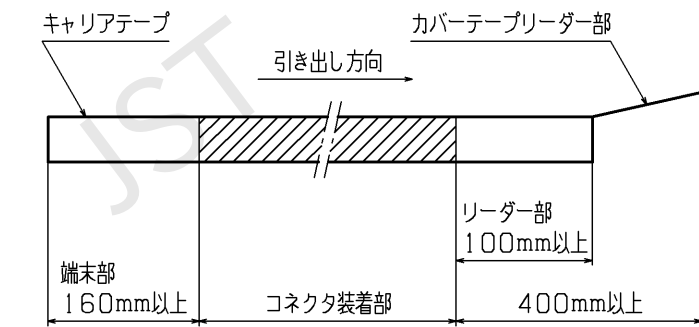

- 4.カバーテープの剥離強度：0.1～1.3N

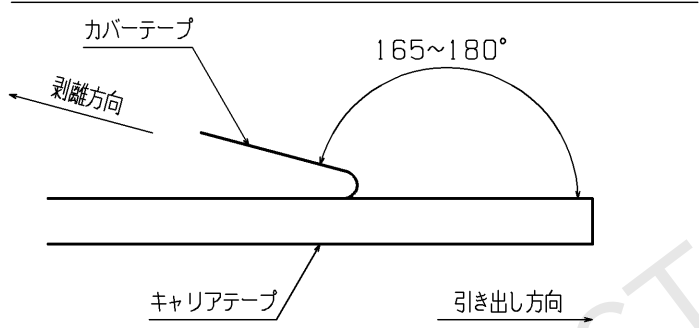


- 5.材料：キャリアテープ：ポリスチレン (PS)
カバーテープ：ポリエステル (PET)
リール：フランジ部-ポリスチレン (PS)
コア部-ポリプロピレン (PP)
ポリスチレン (PS)


- 6.指定公差：±0.3

NOTE

- 1.Connector part:See the DWG. of BSS Connector.
- 2.Quantity to be packaged:300pcs/reel
- 3.Leading tape length.

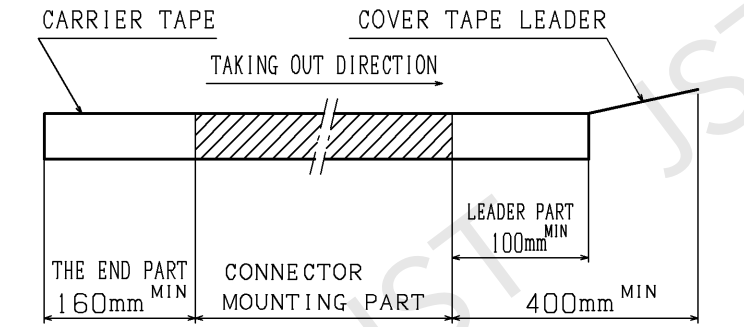


- 4.Cover tape peel strength:0.1~1.3N

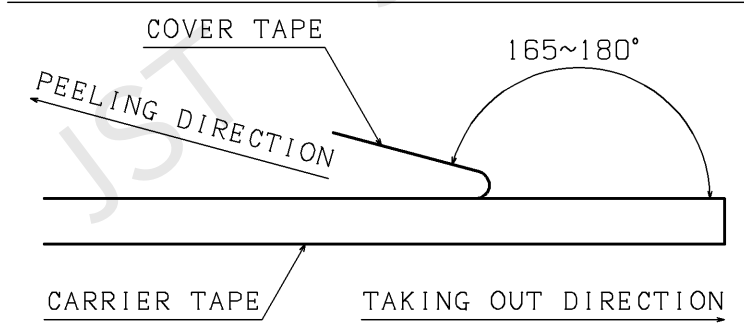

- 5.Material:Carrier tape;Polystyrene (PS)
Cover tape ;Polyester (PET)
Reel;Flange;Polystyrene (PS)
Core ;Polypropylene (PP)
;Polystyrene (PS)


- 6.Unless otherwise specified,
tolerances are:±0.3

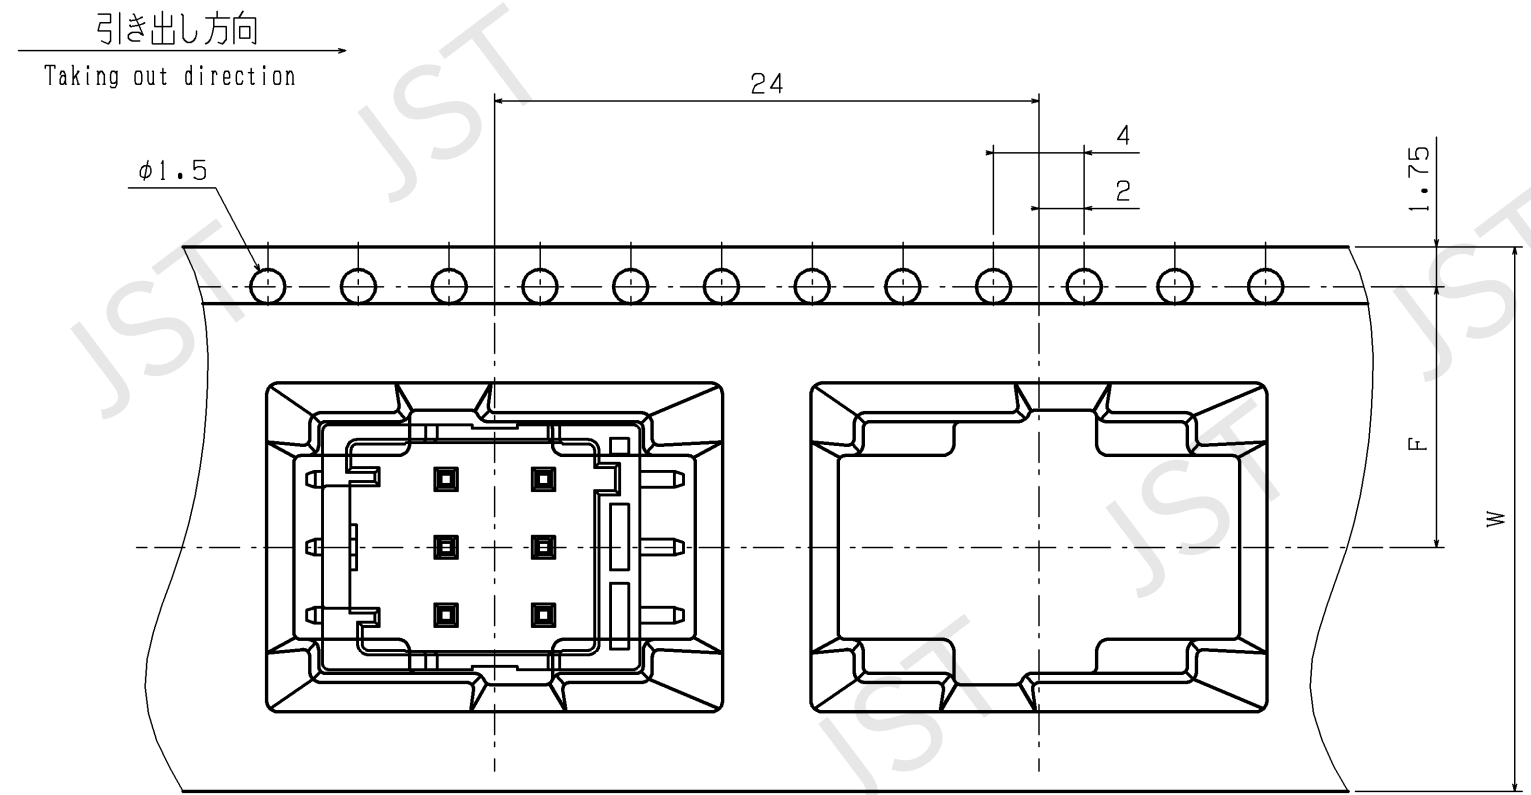

テープ幅W24以下のとき
Tape width (W): 24 or less

品番 No.		部品名 PART NAME		材質 MATERIAL		処理 SURFACE FINISH		備考 REMARKS	
サイズ SIZE		単位 UNIT		投影法 PROJECTION		作図年月日 DATE		納入先 CUSTOMER	
A2		METRIC		第一角法 第一角法		MAR. 12, 2024		品名 SERIES NAME	
								BSSコネクタ エンボステープング品	
								BSS CONNECTOR EMBOSSED-TAPING PRODUCT	
								形番 PART No.	
								BM () B-BSS () S- () -TB	
								図番 DRAWING No.	
								KRD-55274-1	
								RO	

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR ADAPTED, COPIED, OR PUBLISHED WITHOUT WRITTEN PERMISSION. IN THE EVENT THAT THERE ARISE ANY DOUBTS OR CONTROVERSIES BETWEEN JAPANESE AND ENGLISH EXPRESSION, THE JAPANESE TEXT SHALL PREVAIL.

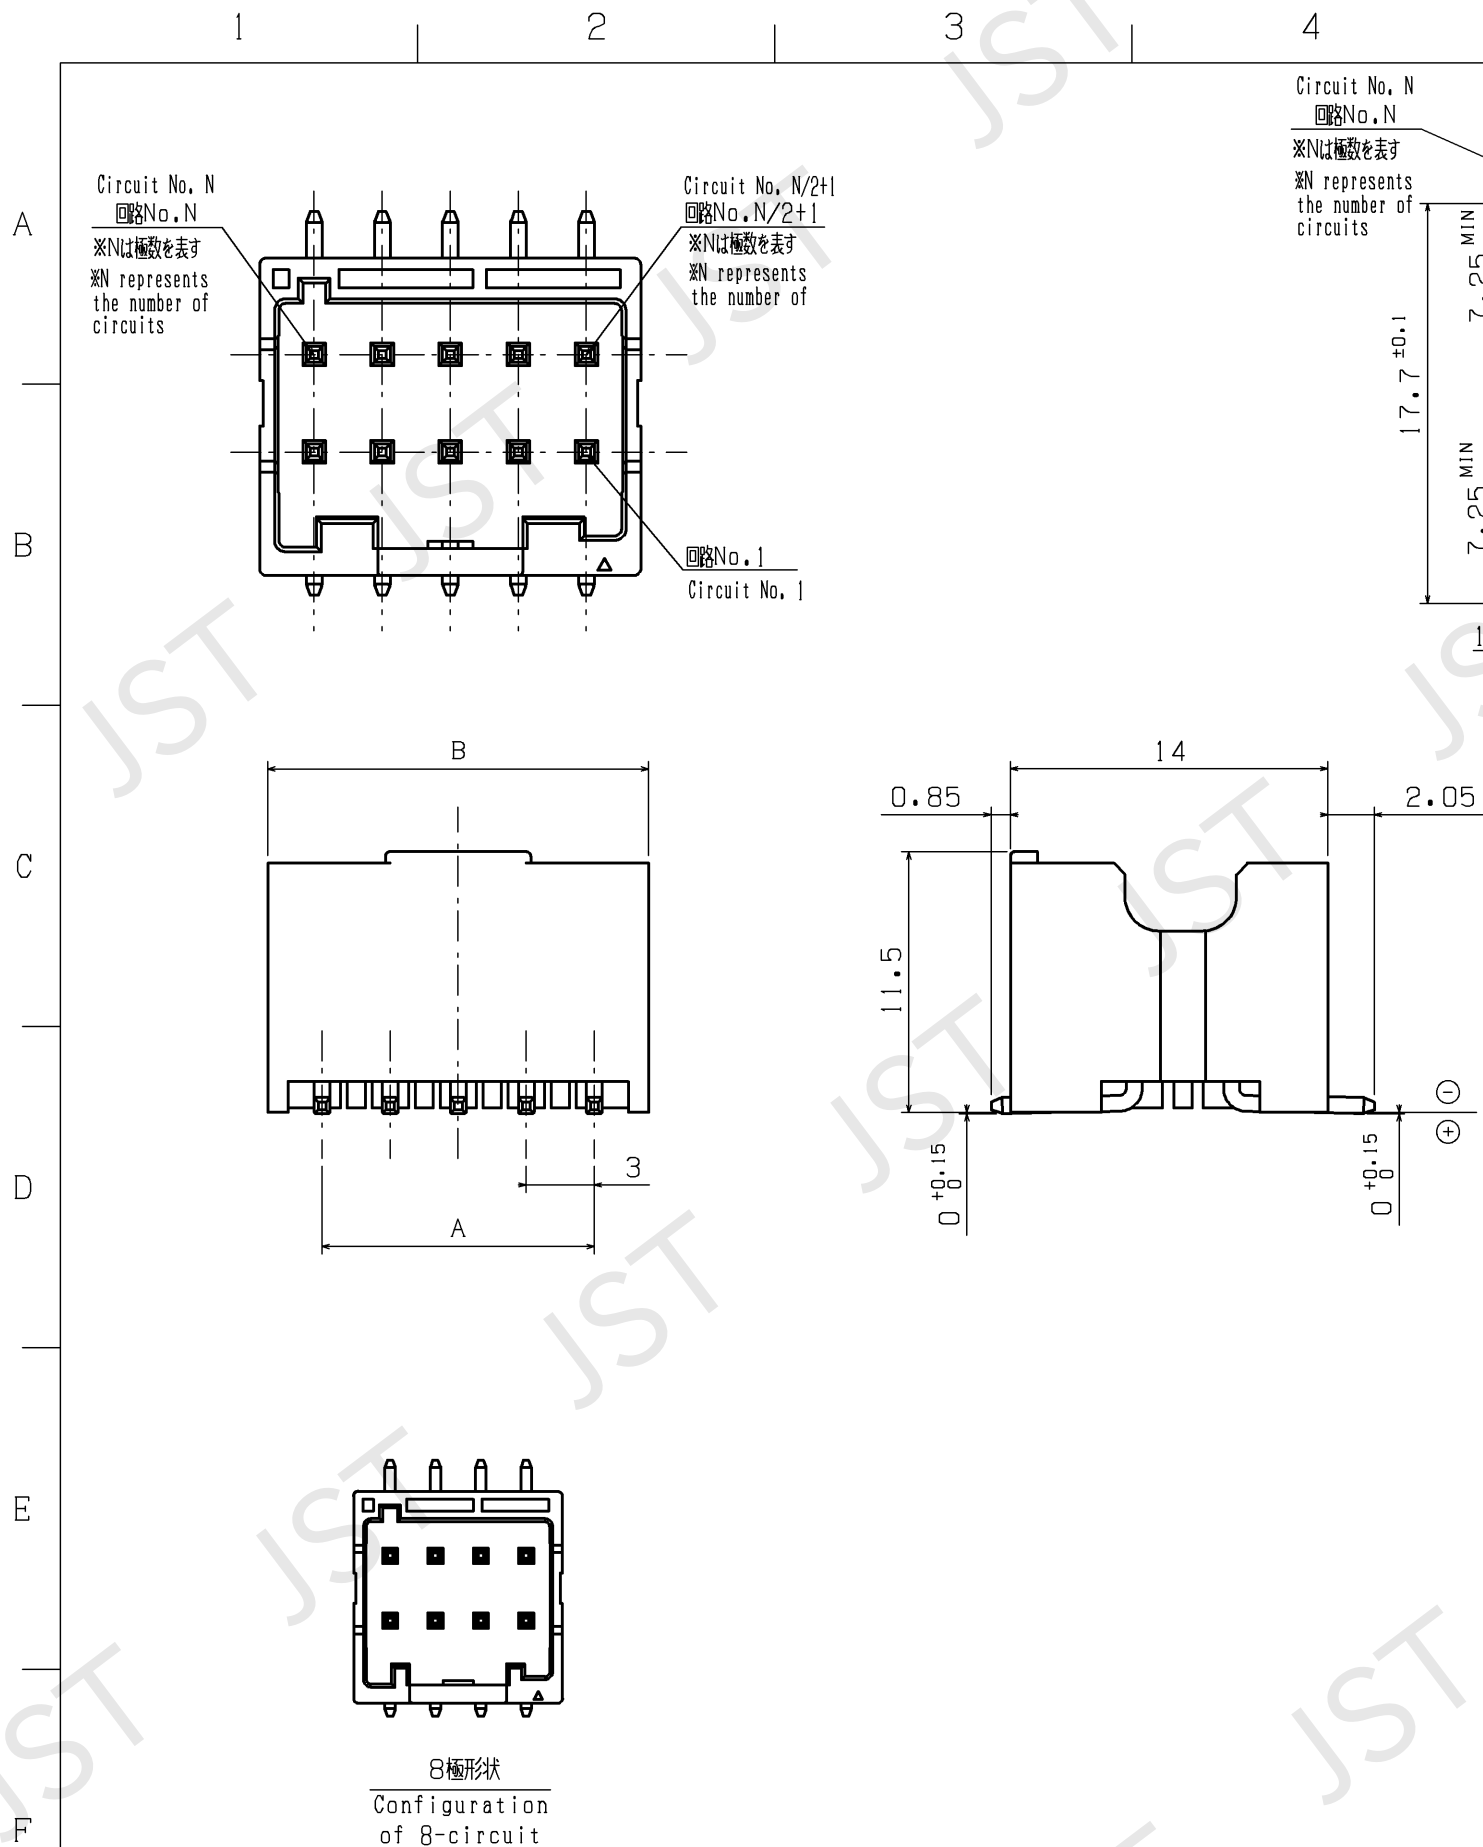

改訂 REV.	変更事項 DESCRIPTIONS	年月日 DATE	0
△			

NOTE

1. 指定外公差: 0<L≤5.0 ; ±0.3
5.0<L ; ±0.4

2. 形番: BM () B-BSSWS-A
極数2ケタ表示 (例/8極: 08)

NOTE

1. Unless otherwise specified
tolerances are: 0<L≤5.0:±0.3
5.0<L :±0.4

2. Part No.: BM () B-BSSWS-A
Number of circuits
in two-digit figure.
(ex./8-circuit:08)

極数 Number of Circuits	A	B
08	9.0	13.8
10	12.0	16.8

2	ハウジング HOUSING	PA (耐熱性) PA (HEAT RESISTANCE)	ナチュラル(白) Natural (White)	UL94V-0		
1	ポスト POST	銅合金 COPPER ALLOY	すずめっき TIN PLATED			
品番 No.	部品名 PART NAME	材質 MATERIAL	処理 SURFACE FINISH	備考 REMARKS		
サイズ SIZE	単位 UNIT	投影法 PROJECTION	作図年月日 DATE	納入先 CUSTOMER		
A3	METRIC		MAR.12.2024	品名 SERIES NAME		
JST 日本圧着端子製造株式会社 J.S.T. MFG.CO., LTD.				品名 SERIES NAME		
				形番 PART No.		
				図番 DRAWING No.		
				尺度 SCALE	BSS コネクタ ベース (8/10極) BSS CONNECTOR HEADER (8/10 CIRCUITS)	
				3:1	形番 PART No.	
					図番 DRAWING No.	
					KRD-55276-1	R0