


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR ADAPTED, COPIED, OR PUBLISHED WITHOUT WRITTEN PERMISSION. IN THE EVENT THAT THERE ARISE ANY DOUBTS OR CONTROVERSIES BETWEEN JAPANESE AND ENGLISH EXPRESSION, THE JAPANESE TEXT SHALL PREVAIL.

A
B
C
D
E



12345678

改訂 REV.	変更事項 DESCRIPTIONS	年月日 DATE	0
△			

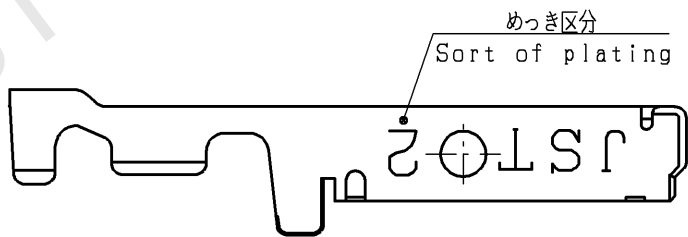

NOTE
1. 指定公差: ± 0.3
2. 接触力区分
 刻印" H ": 高接触力設定

NOTE
1. Unless otherwise specified,
 tolerances are ± 0.3
2. Sort of contact force
 Marking" H ": High contact force type

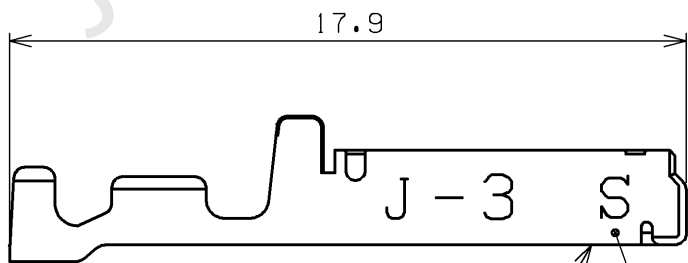

接触力区分
Sort of contact force

電線範囲区分
Sort of wire range

1		リセプタクルコンタクト RECEPTACLE CONTACT		銅合金 COPPER ALLOY		部分金めっき SELECTIVE GOLD PLATED			
品番 No.		部品名 PART NAME		材質 MATERIAL		処理 SURFACE FINISH		備考 REMARKS	
サイズ SIZE		単位 UNIT		投影法 PROJECTION		作図年月日 DATE		納入先 CUSTOMER	
A3		METRIC				MAR.26.2024		JFAコネクタ J300シリーズ リセプタクルコンタクト Sタイプ 金めっき	
 日本圧着端子製造株式会社 J.S.T. MFG.CO.,LTD.						JFA CONNECTOR J300 SERIES RECEPTACLE CONTACT S TYPE GOLD PLATED			
						SF3F-002GF-P2.0			
						KRD-26609-2		R0	