


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR ADAPTED, COPIED, OR PUBLISHED WITHOUT WRITTEN PERMISSION. IN THE EVENT THAT THERE ARISE ANY DOUBTS OR CONTROVERSIES BETWEEN JAPANESE AND ENGLISH EXPRESSION, THE JAPANESE TEXT SHALL PREVAIL.

A
B
C
D
E

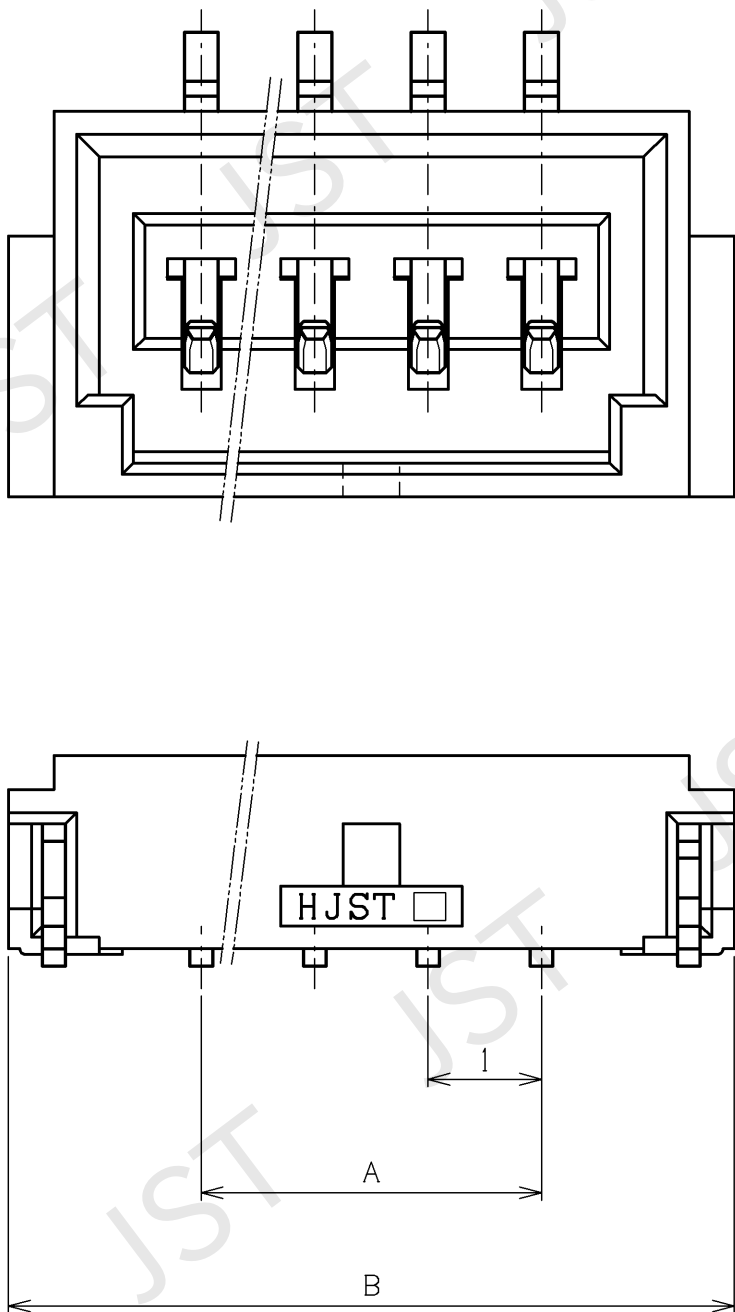


NOTE

- 1. 指定公差 : ± 0.3
- 2. 基板のパターンピッチの公差は累積しないこと。


NOTE

- 1. Unless otherwise specified, tolerances are ± 0.3
- 2. Tolerance of pattern pitch on PCB are not cumulative.

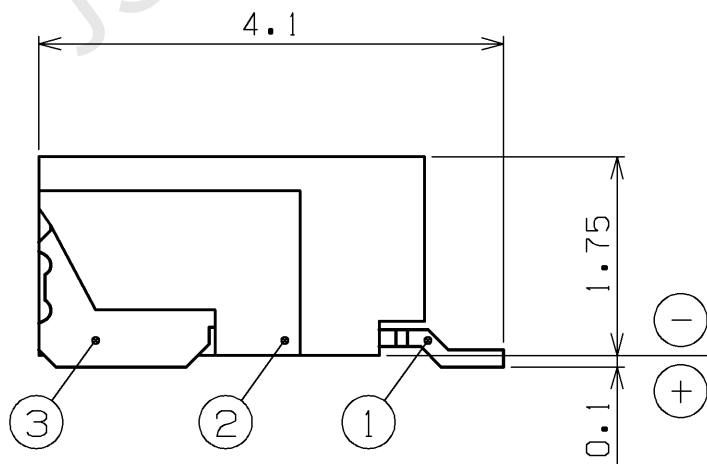

極数 Circuits	A	B
2	1.0	4.4
3	2.0	5.4
4	3.0	6.4

改訂 REV.	変更事項 DESCRIPTIONS	年月日 DATE	0
△			

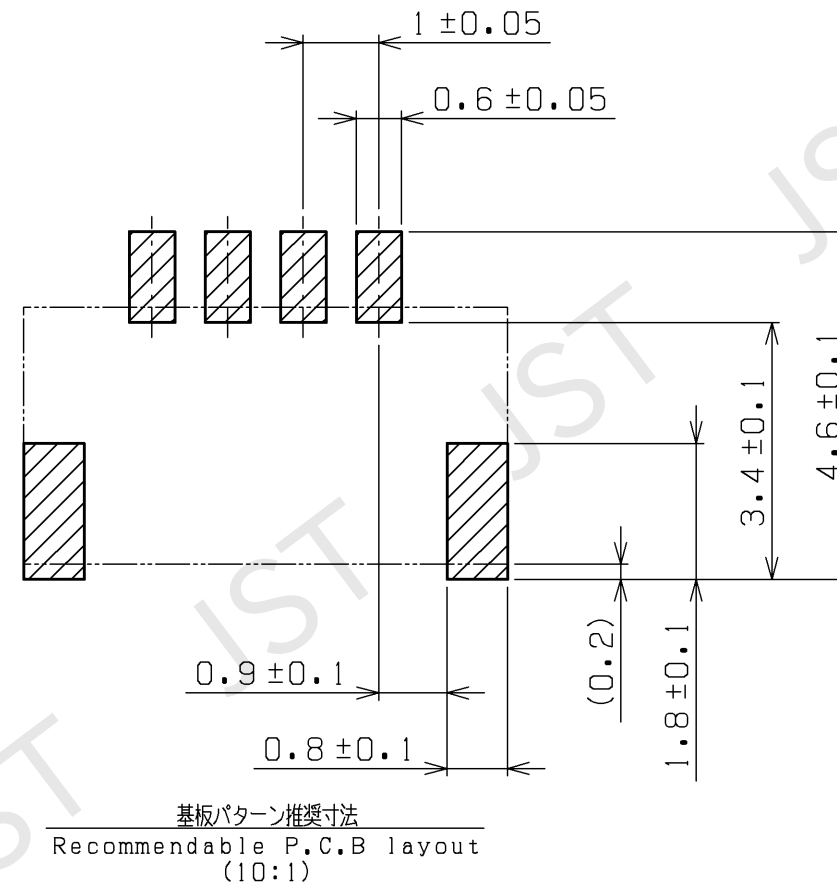

3	補強タブ REINFORCEMENT	銅合金 COPPER ALLOY	すずめっき TIN PLATED	
2	ベースハウジング BASE HOUSING	PA (耐熱性) PA (HEAT RESISTANCE)		UL94V-0 ナチュラル NATURAL
1	コンタクト CONTACT	銅合金 COPPER ALLOY	すずめっき TIN PLATED	
品番 No.	部品名 PART NAME	材質 MATERIAL	処理 SURFACE FINISH	備考 REMARKS
サイズ SIZE	単位 UNIT	投影法 PROJECTION	作図年月日 DATE	納入先 CUSTOMER
A3	METRIC		JUN.17.2024	
JST 日本圧着端子製造株式会社 J.S.T. MFG.CO., LTD.				品名 SERIES NAME
				ASR コネクタ ASR CONNECTOR
				形番 PART No.
				BM () B-ASRS (LF) (SN)
				図番 DRAWING No.
				KRD-32170-2 R0

NOTE

- Connector part: See the DWG. of ASR connector.
- Quantity to be packaged: 3500 pcs/reel
- Leading tape length.

Diagram illustrating the dimensions and components of the carrier tape:

- CARRIER TAPE
- COVER TAPE LEADER
- TAKING OUT DIRECTION
- THE END PART: 160mm^{MIN}
- CONNECTOR MOUNTING PART
- LEADER PART: 100mm^{MIN}
- 400mm^{MIN}

- Cover tape peel strength: 0.1~1N
(Peel speed: 300mm/minute)

Diagram illustrating the peeling direction of the cover tape:

- COVER TAPE
- PEELING DIRECTION
- 165~180°
- CARRIER TAPE
- TAKING OUT DIRECTION

- Material: Carrier tape; Polyester (PET)
Polystyrene (PS)
Cover tape ; Polyester (PET)
Reel; Flange ; Polystyrene (PS)
Core ; Polypropylene (PP)
Polystyrene (PS)
- Unless otherwise specified,
tolerances are ± 0.3

極數 Circuits	寸法/Dimensions			
	B0	F	W	W1
2	4.75	5.5	12.0	13.5
3	5.75	5.5	12.0	13.5
4	6.95	7.5	16.0	17.5