



THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR ADAPTED, COPIED, OR PUBLISHED WITHOUT WRITTEN PERMISSION. IN THE EVENT THAT THERE ARISE ANY DOUBTS OR CONTROVERSIES BETWEEN JAPANESE AND ENGLISH EXPRESSION, THE JAPANESE TEXT SHALL PREVAIL.

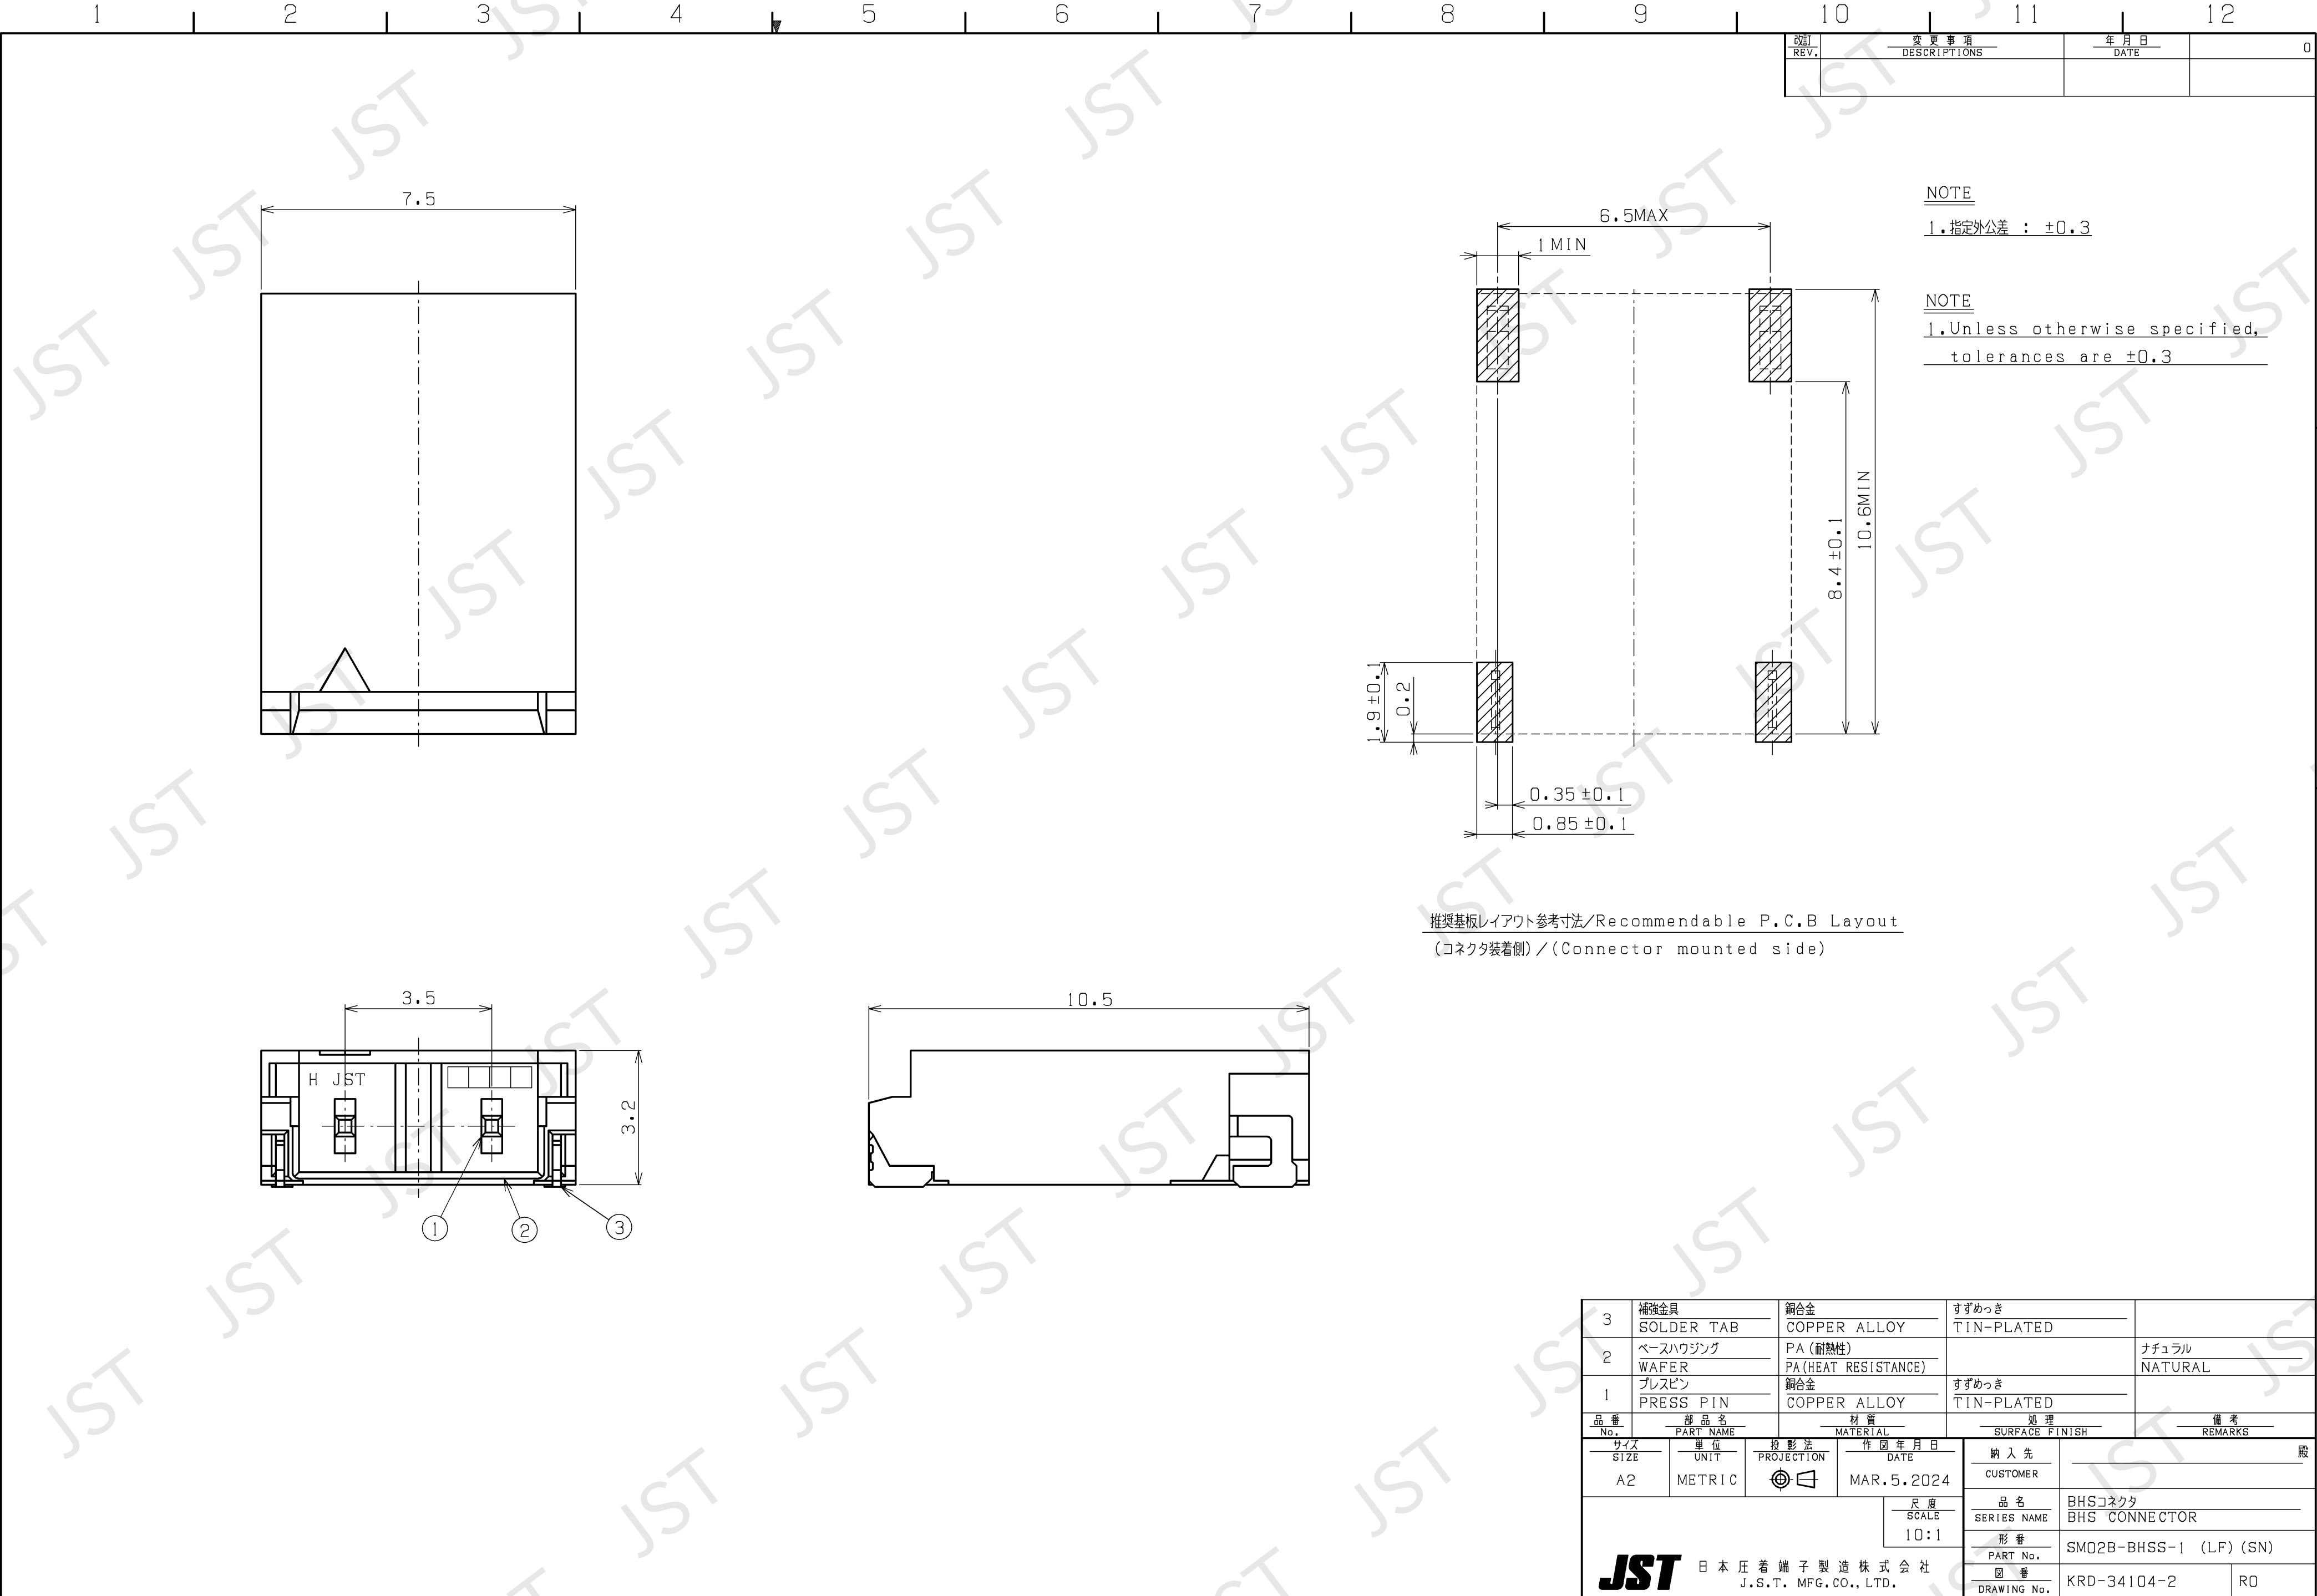


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR ADAPTED, COPIED, OR PUBLISHED WITHOUT WRITTEN PERMISSION. IN THE EVENT THAT THERE ARISE ANY DOUBTS OR CONTROVERSIES BETWEEN JAPANESE AND ENGLISH EXPRESSION, THE JAPANESE TEXT SHALL PREVAIL.

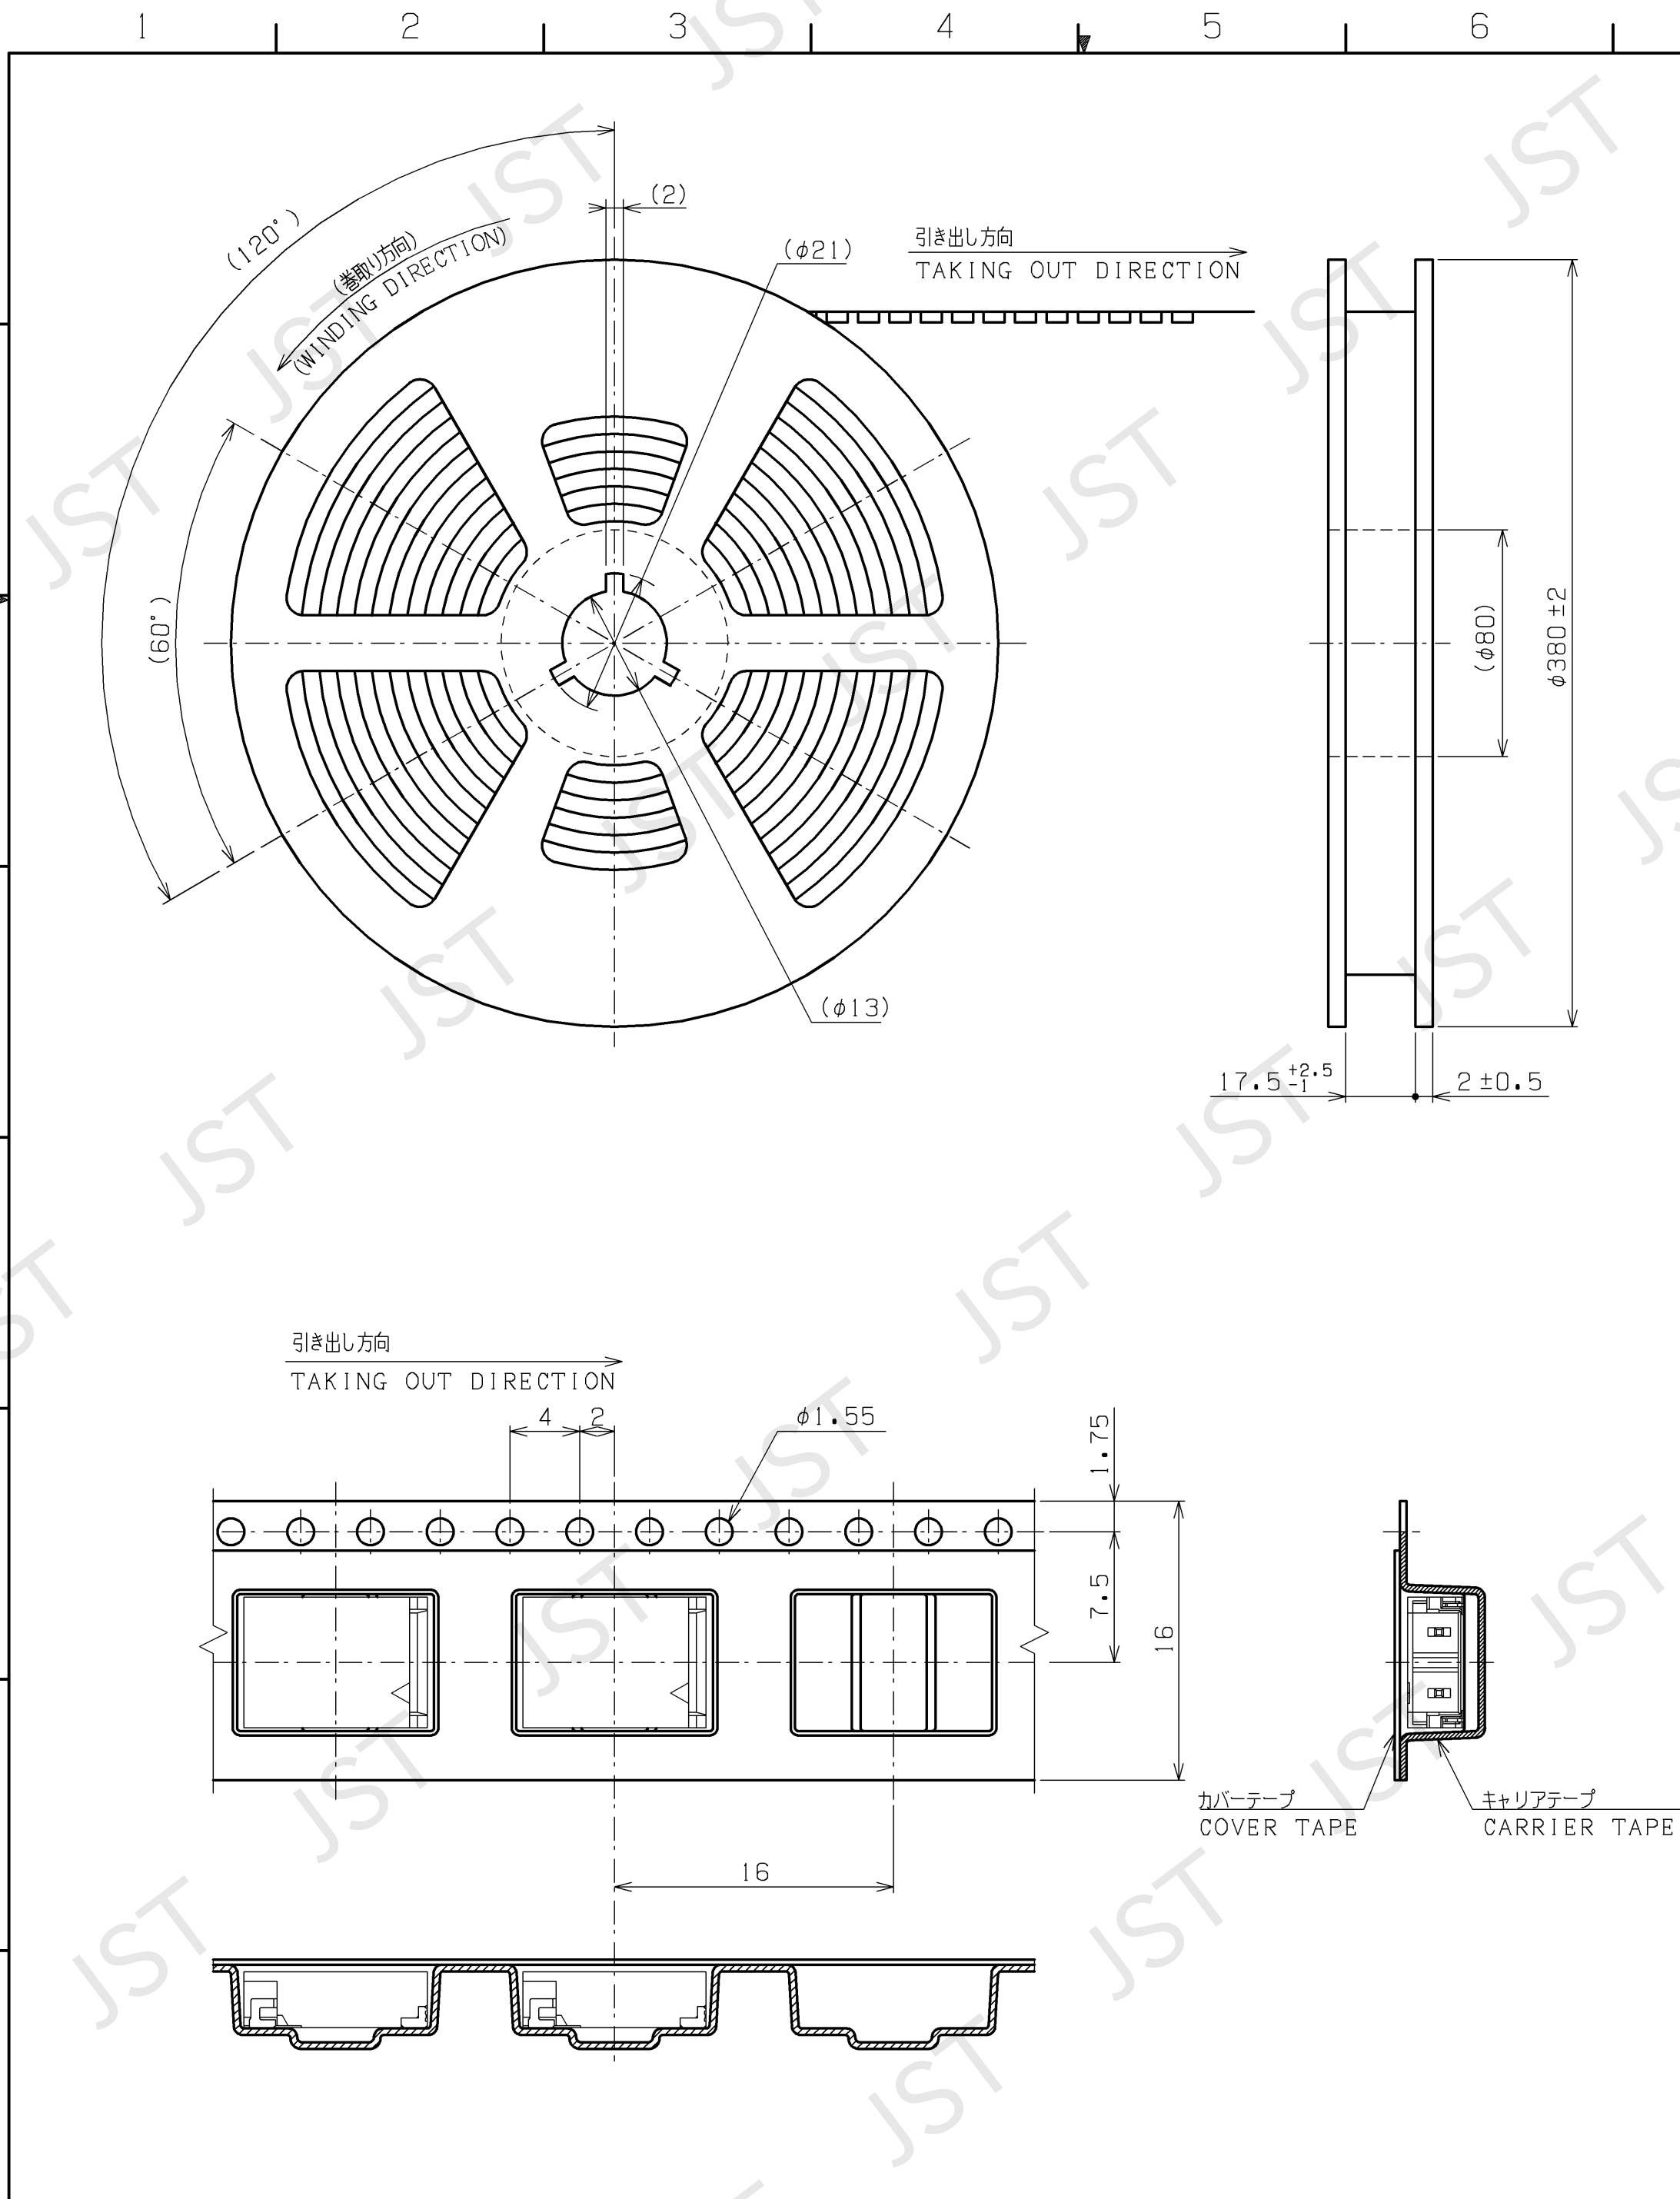


NOTE

- 1. コネクタ本体についてはベース単体の別図面を参照ください。
- 2. 梱包数量：1000個/リール。
- 3. リードテープ長さ

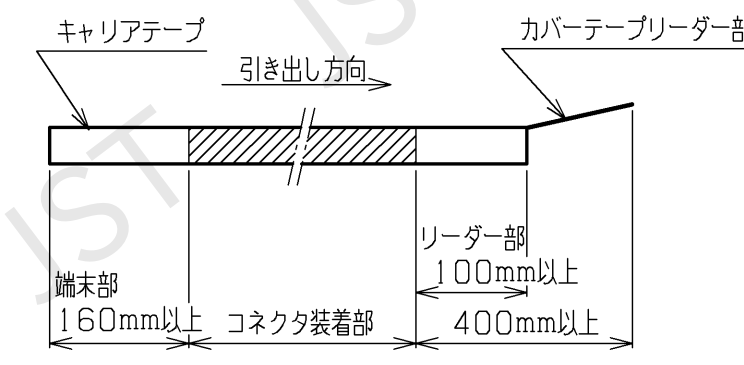


4. カバーテープの剥離強度：0.1~1N

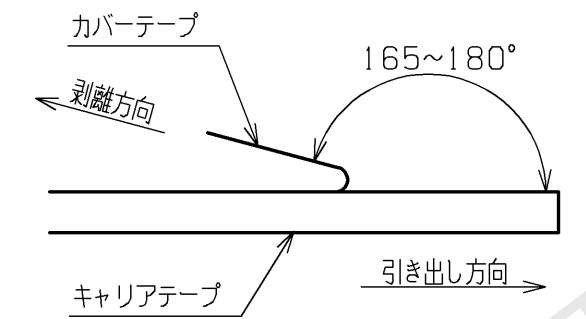


- 5. 材料：キャリアテープ：ポリエステル (PET)
ポリスチレン (PS)
カバーテープ：ポリエステル (PET)
リール：フランジ部-ポリスチレン (PS)
コア部-ポリプロピレン (PP)
ポリスチレン (PS)
- 6. 一般公差： ± 0.3

NOTE

- 1. Connector part: See the dwg. of header for BHS connector.
- 2. Quantity to be packaged: 1000 pcs/reel
- 3. Leading tape length.

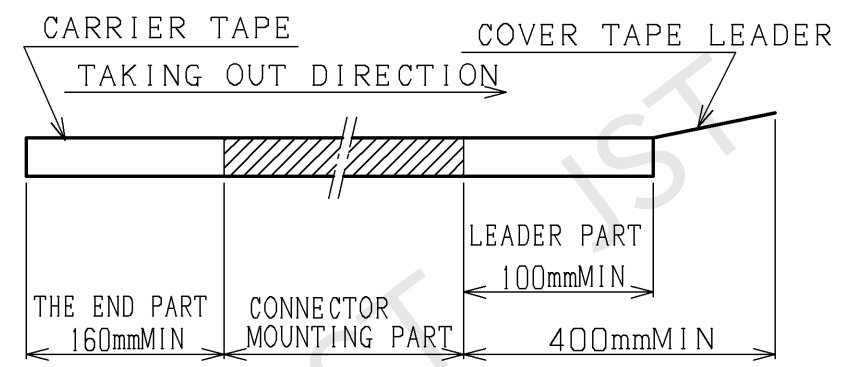

4. Cover tape peel strength: 0.1~1N

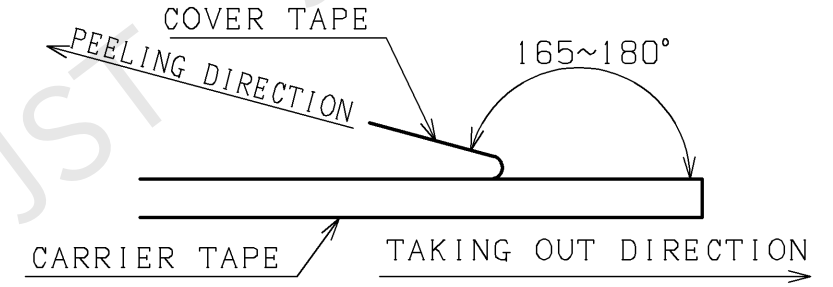

- 5. Material: Carrier tape: Polyester (PET)
Polystyrene (PS)
Cover tape: Polyester (PET)
Reel; Flange; Polystyrene (PS)
Core; Polypropylene (PP)
Polystyrene (PS)
- 6. Unless otherwise specified, tolerances are ± 0.3 .

品番 No.	部品名 PART NAME	材質 MATERIAL	処理 SURFACE FINISH	備考 REMARKS					
サイズ SIZE	単位 UNIT	投影法 PROJECTION	作図年月日 DATE	納入先 CUSTOMER	殿				
A2	METRIC		MAR.5.2024	品名 SERIES NAME	BHSコネクタ エンボスターピング品 BHS CONNECTOR EMBOSSSED-TAPING PRODUCT				
JST 日本圧着端子製造株式会社 J.S.T. MFG.CO.,LTD.				形番 PART No.	SM02B-BHSS-1-TB (LF) (SN)				
				図番 DRAWING No.	KRD-34111-2				RO