
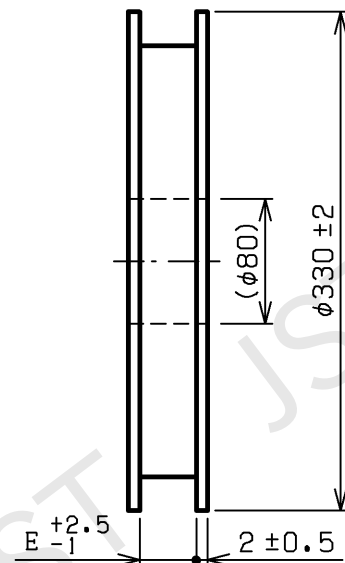
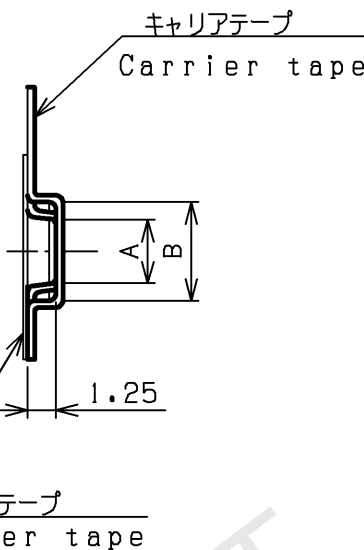
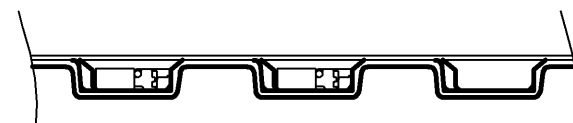
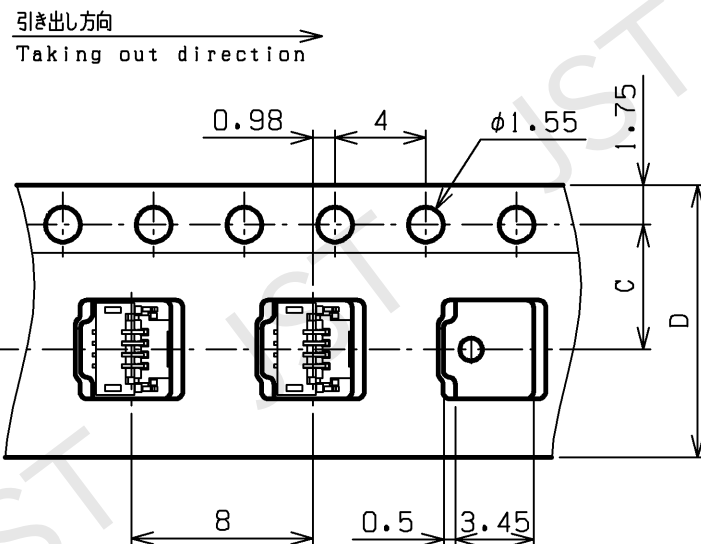



THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR ADAPTED, COPIED, OR PUBLISHED WITHOUT WRITTEN PERMISSION. IN THE EVENT THAT THERE ARISE ANY DOUBTS OR CONTROVERSIES BETWEEN JAPANESE AND ENGLISH EXPRESSION, THE JAPANESE TEXT SHALL PREVAIL.

A
B
C
D
E
F

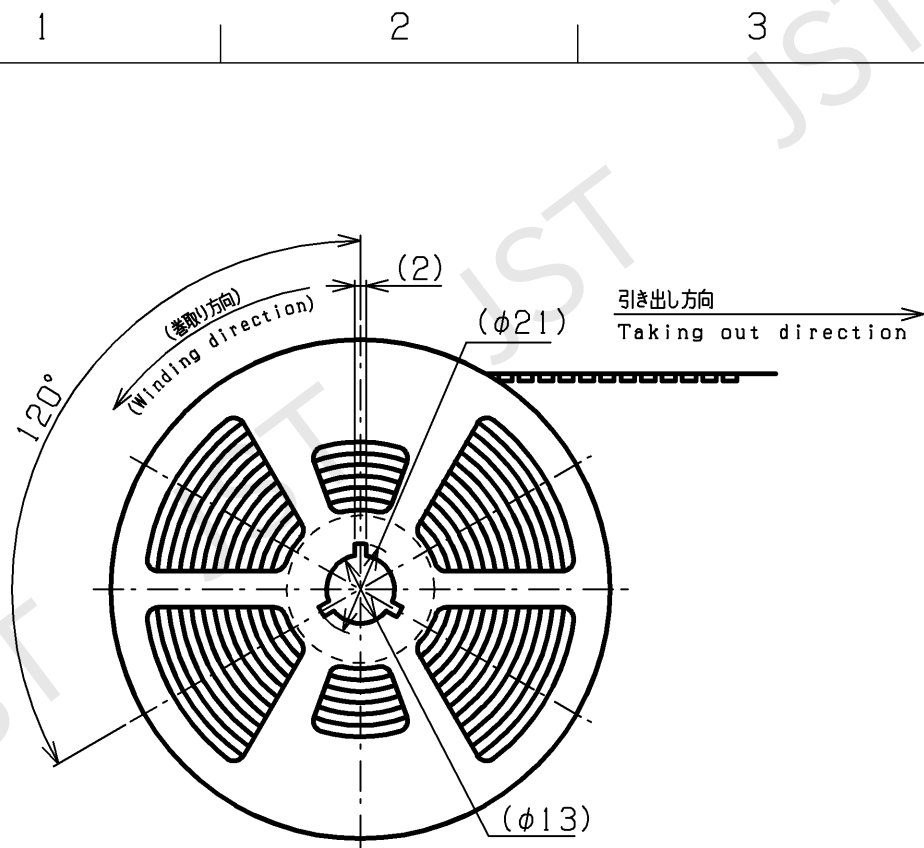


改訂 REV.	変 更 事 項 DESCRIPTIONS	年 月 日 DATE	0
△			

NOTE
1) コネクタ本体については、単体の別図面を参照ください。
2) 梱包数量: 6, 000個/リール
3) リードテープ長さ

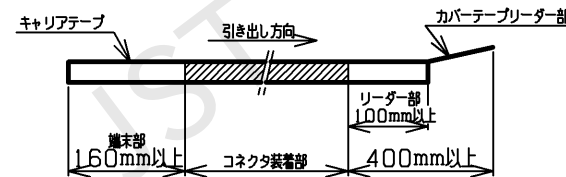


4) カバーテープの剥離強度: 0.1~1.3N (剥離速度 300mm/分)




5) 材料: キャリアテープ: ポリエステル (PET)
または、ポリスチレン (PS)
カバーテープ : ポリエステル (PET)
リール : フランジ部-ポリスチレン (PS)
コア部-ポリプロピレン (PP)
ポリスチレン (PS)
6) 一般公差: ±0.3

NOTE
1) Connector part: See the DWG.
2) Quantity to be packaged: 6, 000pcs/reel.
3) Leading tape length.

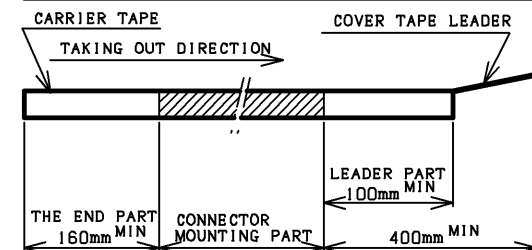

4) Cover tape peel strength: 0.1~1.3N
Peeling speed: 300mm/minute.

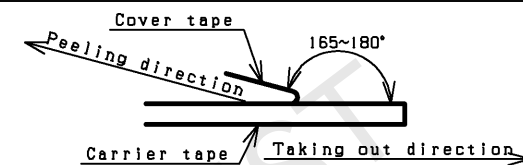

5) Material: Carrier tape; Polyester (PET)
or Polystyrene (PS)
Cover tape : Polyester (PET)
Reel; Flange : Polystyrene (PS)
Core: Polypropylene (PP)
Polystyrene (PS)
6) Unless otherwise specified, tolerances are ±0.3



極数 Circuits	寸 法 Dimensions				
	A	B	C	D	E
4	2.8	4.35	5.5	12.0	13.5

1				
品 番 No.	部 品 名 PART NAME	材 質 MATERIAL	処 理 SURFACE FINISH	備 考 REMARKS
サイズ SIZE	単 位 UNIT	投 影 法 PROJECTION	作 図 年 月 日 DATE	納 入 先 CUSTOMER
A3	METRIC		MAR.26.2024	品 名 SERIES NAME
			尺 度 SCALE	FHSYコネクタ エンボステーピング品
			FREE	FHSY CONNECTOR EMBOSSED TAPING
			図 番 DRAWING No.	() FHSY-RSM1-GAN-TB (HF) (NN)
日本圧着端子製造株式会社 J.S.T. MFG.CO., LTD.				形 番 PART No.
				図 番 DRAWING No.
				KRD-51848-1
				R0


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR ADAPTED, COPIED, OR PUBLISHED WITHOUT WRITTEN PERMISSION. IN THE EVENT THAT THERE ARISE ANY DOUBTS OR CONTROVERSIES BETWEEN JAPANESE AND ENGLISH EXPRESSION, THE JAPANESE TEXT SHALL PREVAIL.

12345678


A
B
C
D
E
F

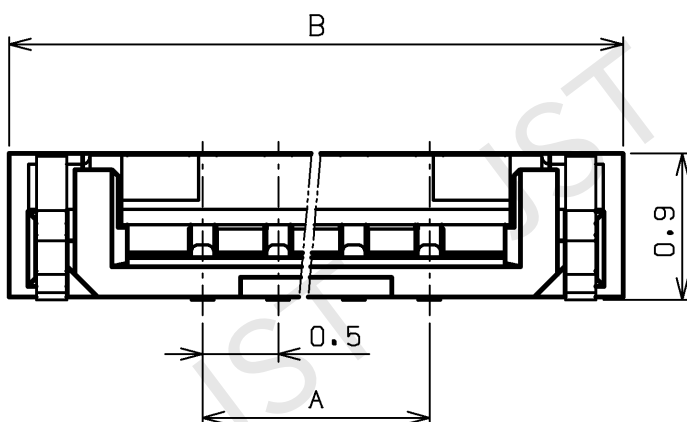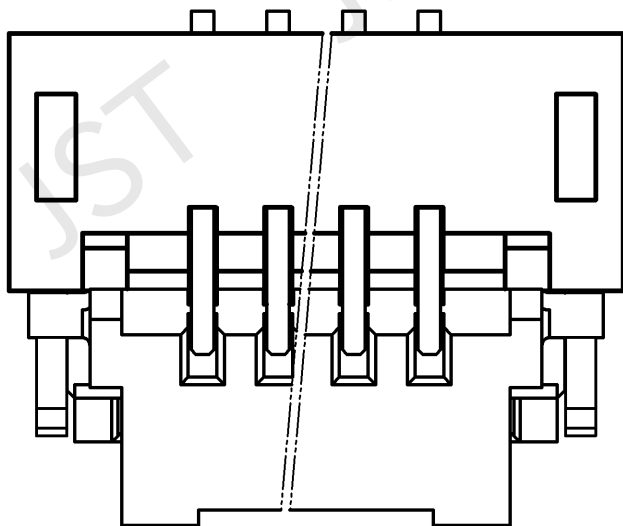

極数 Circuits	寸法 Dimensions	
	A	B
4	1.5	4.06

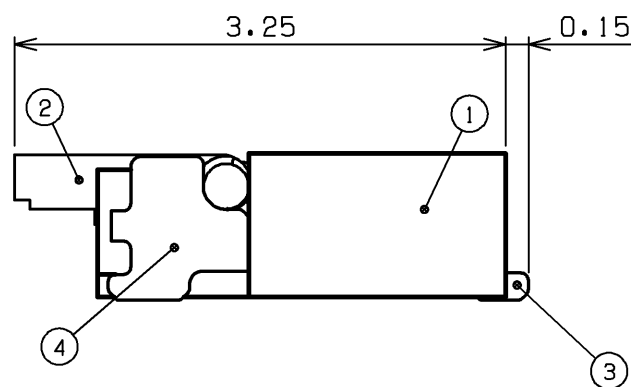

改訂 REV.	変更事項 DESCRIPTIONS	年月日 DATE	0
△			

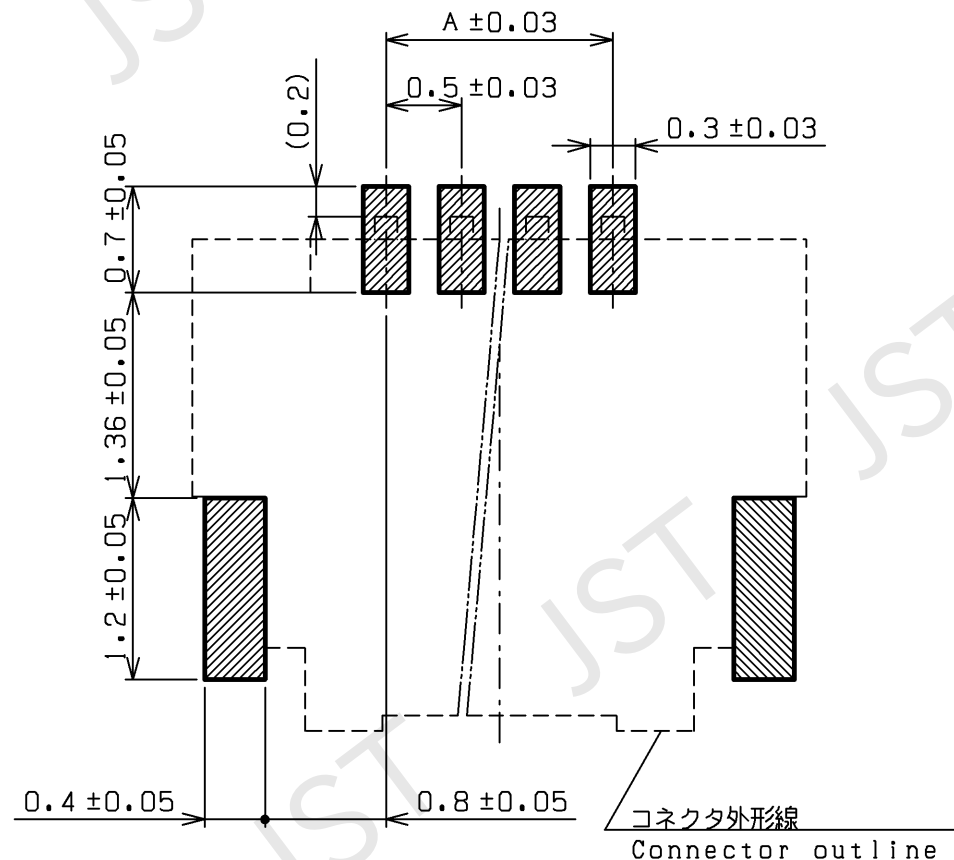

NOTE
1. 指定公差: 0 ≤ L < 2; ±0.15、2 ≤ L < 5; ±0.2
5 ≤ L; ±0.3
2. 適合FPCはKRD-51895-1参照
3. 使用FPCとコネクタの適合性確認を必ず実施の上使用の事。

NOTE
1. Unless otherwise specified, tolerances are 0 ≤ L < 2; ±0.15、2 ≤ L < 5; ±0.2、5 ≤ L; ±0.3
2. Applicable FPC Drawing No.: KRD-51895-1.
3. Confirm the applicability of the connector with the FPC used, before use.

4	補強タブ REINFORCEMENT TAB	銅合金 COPPER ALLOY	すずめっき TIN PLATED	
3	コンタクト CONTACT	銅合金 COPPER ALLOY	部分金めっき SELECTIVE GOLD PLATED	
2	カバーハウジング COVER HOUSING	PA (耐熱性) PA (HEAT RESISTANCE)		UL94HB 灰色 GRAY
1	ソケットハウジング SOCKET HOUSING	LCP		UL94V-0 ナチュラル NATURAL
品番 No.	部品名 PART NAME	材質 MATERIAL	処理 SURFACE FINISH	備考 REMARKS
サイズ SIZE	単位 UNIT	投影法 PROJECTION	作図年月日 DATE	納入先 CUSTOMER
A3	METRIC		MAR.26.2024	品名 SERIES NAME
JST 日本圧着端子製造株式会社 J.S.T. MFG.CO., LTD.				形状 PART No.
				図番 DRAWING No.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR ADAPTED, COPIED, OR PUBLISHED WITHOUT WRITTEN PERMISSION. IN THE EVENT THAT THERE ARISE ANY DOUBTS OR CONTROVERSIES BETWEEN JAPANESE AND ENGLISH EXPRESSION, THE JAPANESE TEXT SHALL PREVAIL.

