



THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR ADAPTED, COPIED, OR PUBLISHED WITHOUT WRITTEN PERMISSION. IN THE EVENT THAT THERE ARISE ANY DOUBTS OR CONTROVERSIES BETWEEN JAPANESE AND ENGLISH EXPRESSION, THE JAPANESE TEXT SHALL PREVAIL.

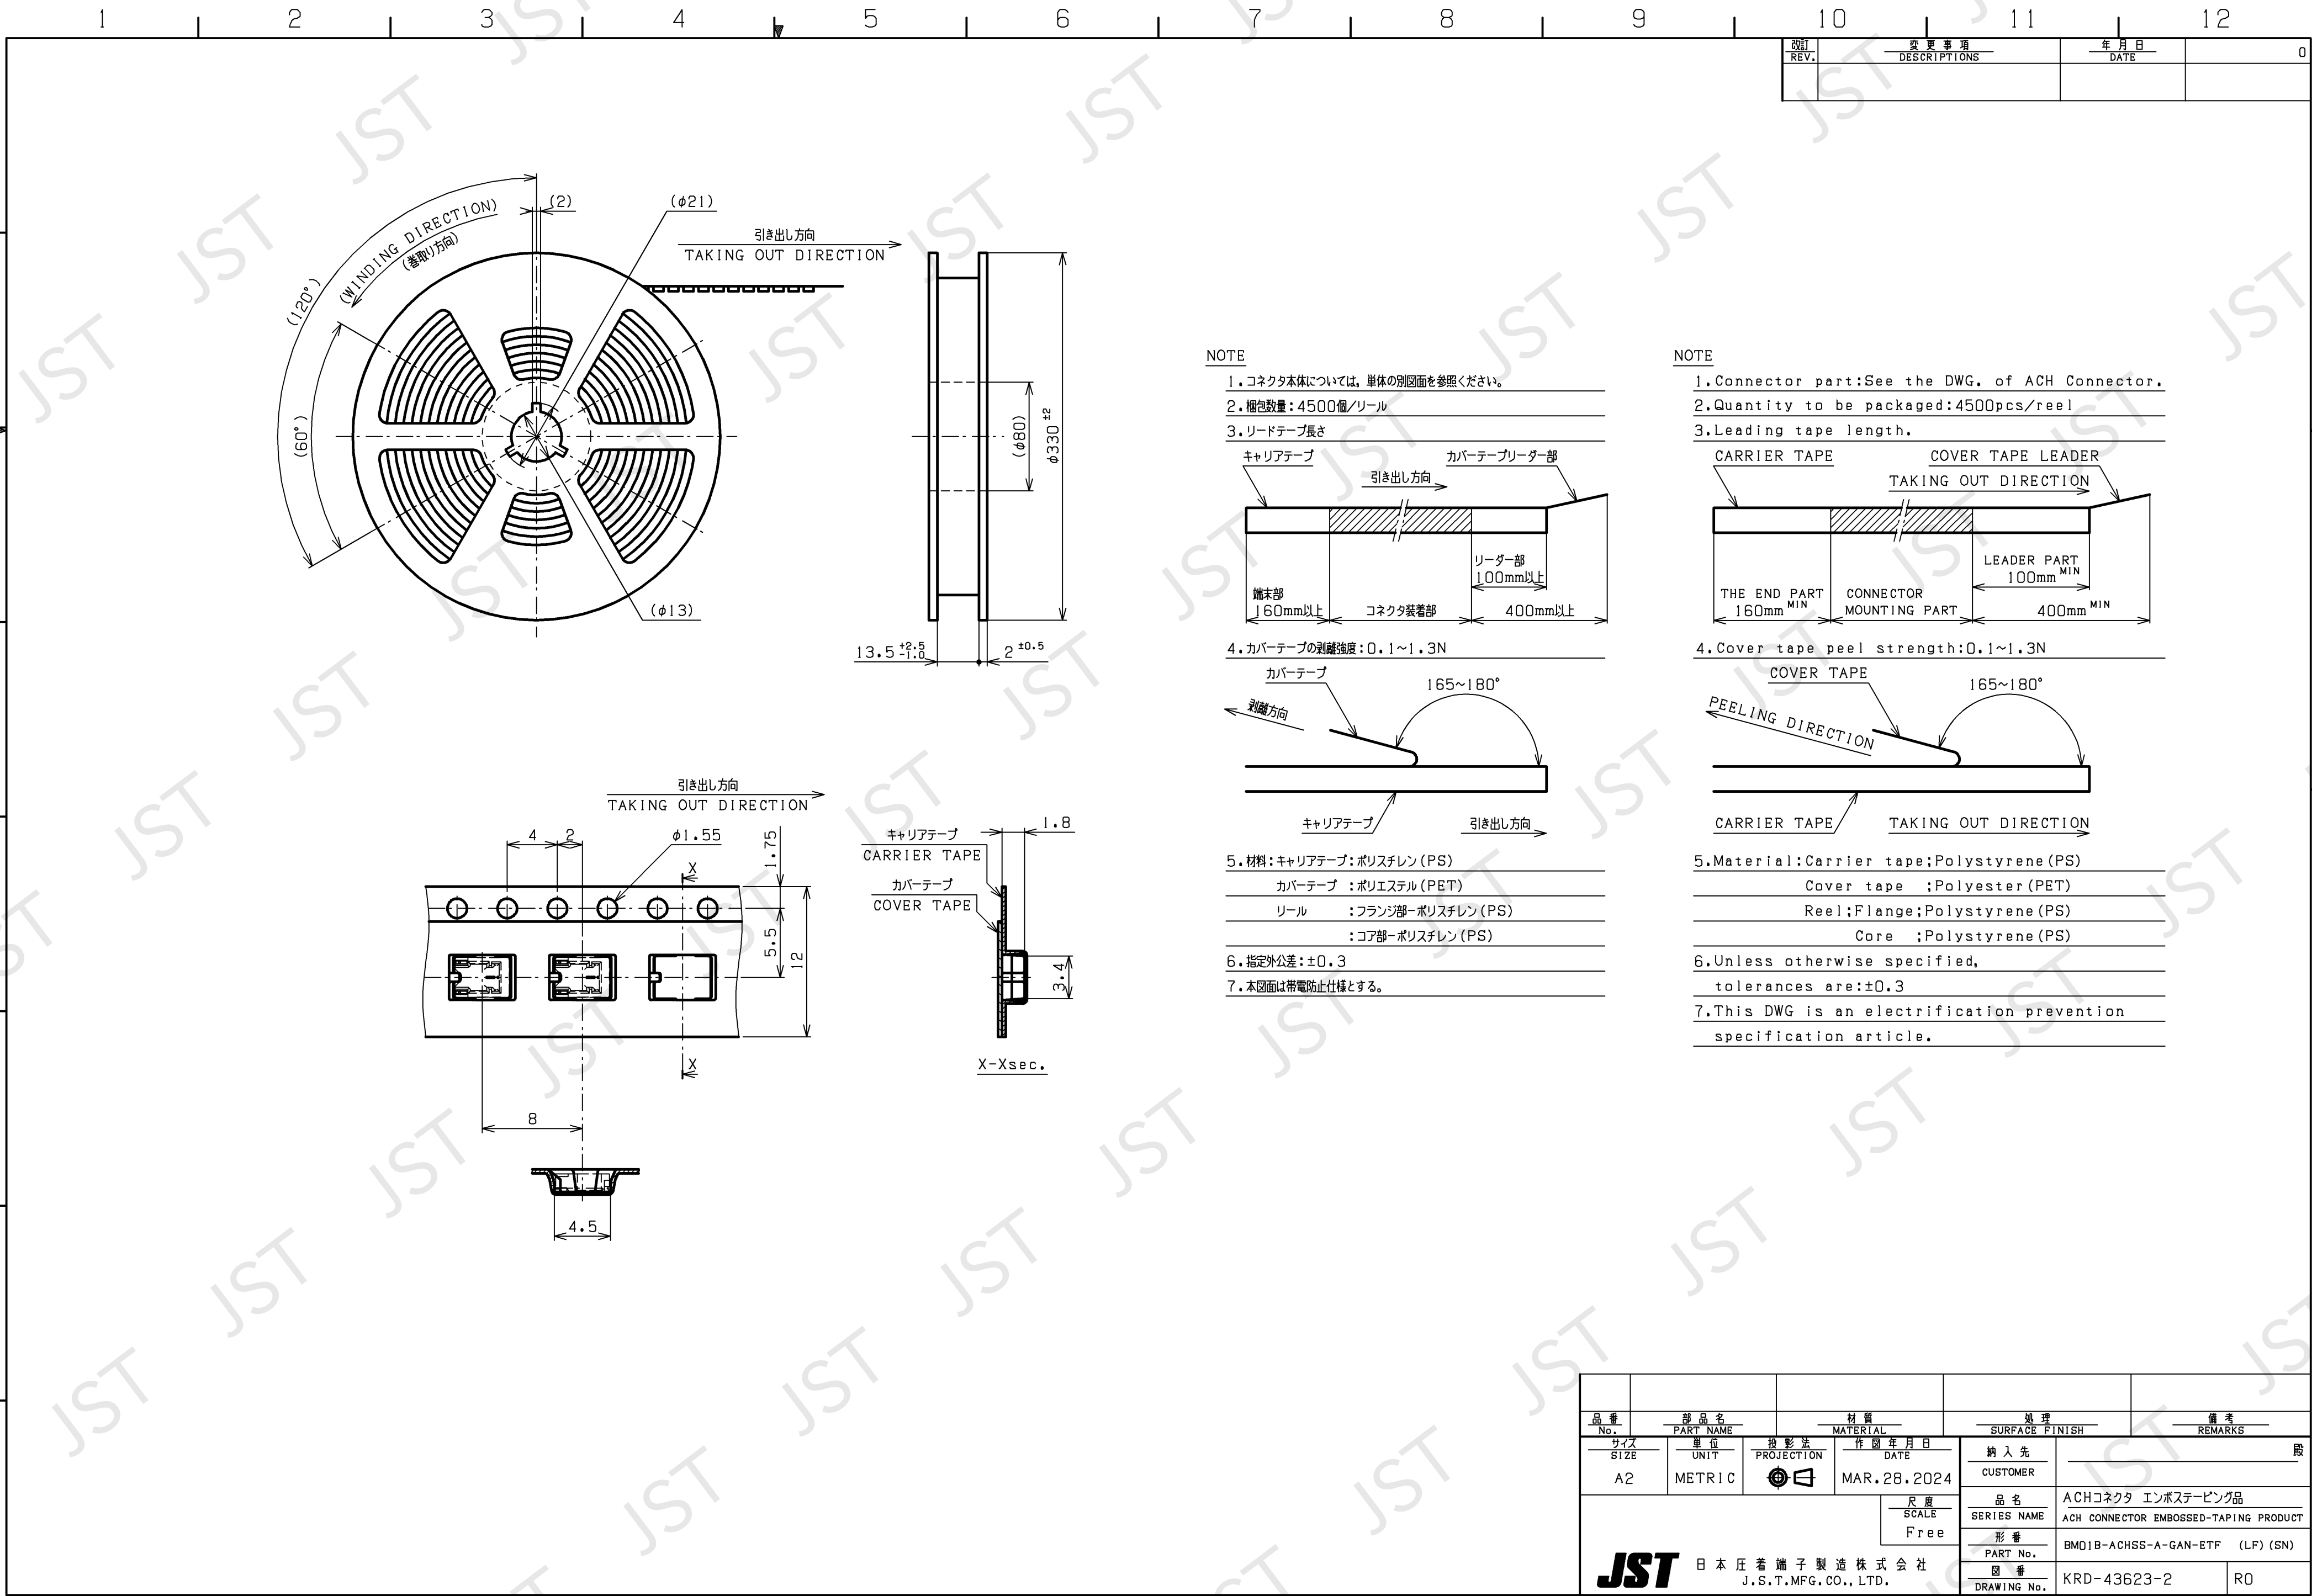


NOTE

- 1. コネクタ本体については、単体の別図面を参照ください。
- 2. 梱包数量：4500個/リール
- 3. リードテープ長さ

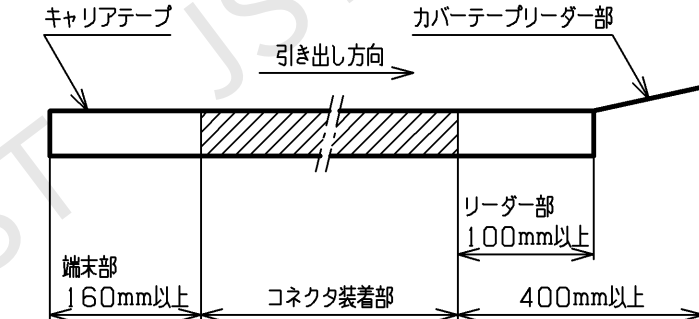


- 4. カバーテープの剥離強度：0.1~1.3N

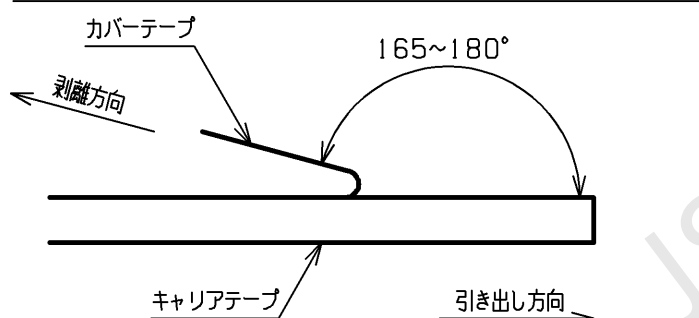


- 5. 材料：キャリアテープ：ポリスチレン (PS)
カバーテープ：ポリエステル (PET)
リール：フランジ部：ポリスチレン (PS)
コア部：ポリスチレン (PS)
- 6. 指定外公差：±0.3
- 7. 本図面は帯電防止仕様とする。

NOTE

- 1. Connector part: See the DWG. of ACH Connector.
- 2. Quantity to be packaged: 4500 pcs/reel
- 3. Leading tape length.

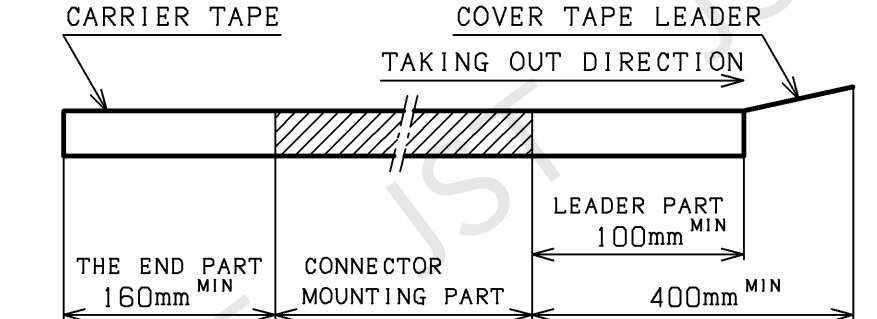

- 4. Cover tape peel strength: 0.1~1.3N

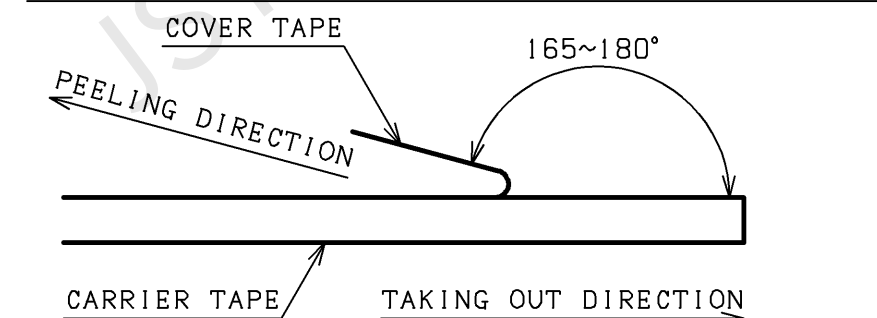

- 5. Material: Carrier tape; Polystyrene (PS)
Cover tape ; Polyester (PET)
Reel; Flange; Polystyrene (PS)
Core ; Polystyrene (PS)
- 6. Unless otherwise specified, tolerances are: ±0.3
- 7. This DWG is an electrification prevention specification article.

品番 No.	部品名 PART NAME	材質 MATERIAL	処理 SURFACE FINISH	備考 REMARKS
サイズ SIZE A2	単位 UNIT METRIC	投影法 PROJECTION MAR. 28, 2024	納入先 CUSTOMER	殿
JST 日本圧着端子製造株式会社 J.S.T. MFG. CO., LTD.		尺度 SCALE Free	品名 SERIES NAME ACH コネクタ エンボスターピング品 ACH CONNECTOR EMBOSSED-TAPING PRODUCT	
			形番 PART No. BMO1B-ACHSS-A-GAN-ETF (LF) (SN)	
			図番 DRAWING No. KRD-43623-2	RO

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR ADAPTED, COPIED, OR PUBLISHED WITHOUT WRITTEN PERMISSION.
IN THE EVENT THAT THERE ARISE ANY DOUBTS OR CONTROVERSIES BETWEEN JAPANESE AND ENGLISH EXPRESSION, THE JAPANESE TEXT SHALL PREVAIL.

