

LOC		JUST		REVISONS			
J		X		REV	DESCRIPTION	DATE	APVD
				A	RELEASED	06OCT2015	TS HY
				A1	REVISED	ECR-16-003897	1MAR2016 TS HY

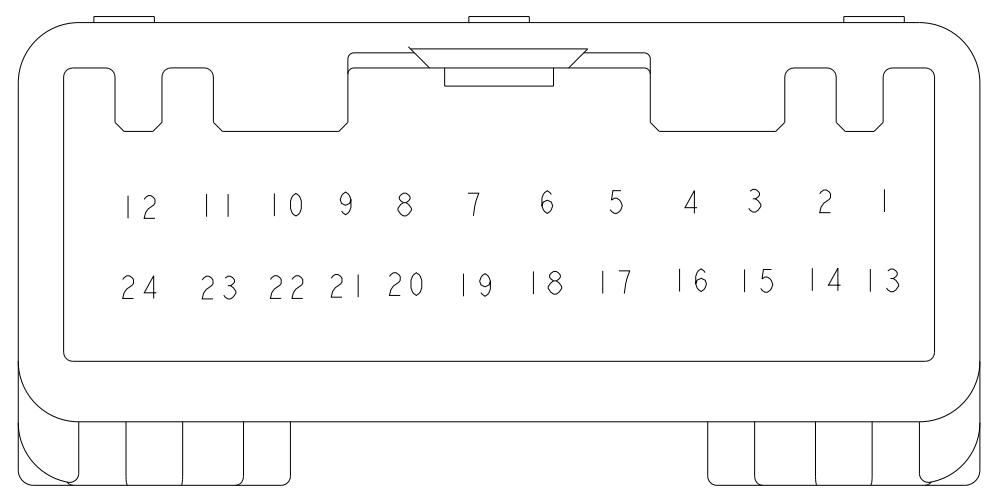
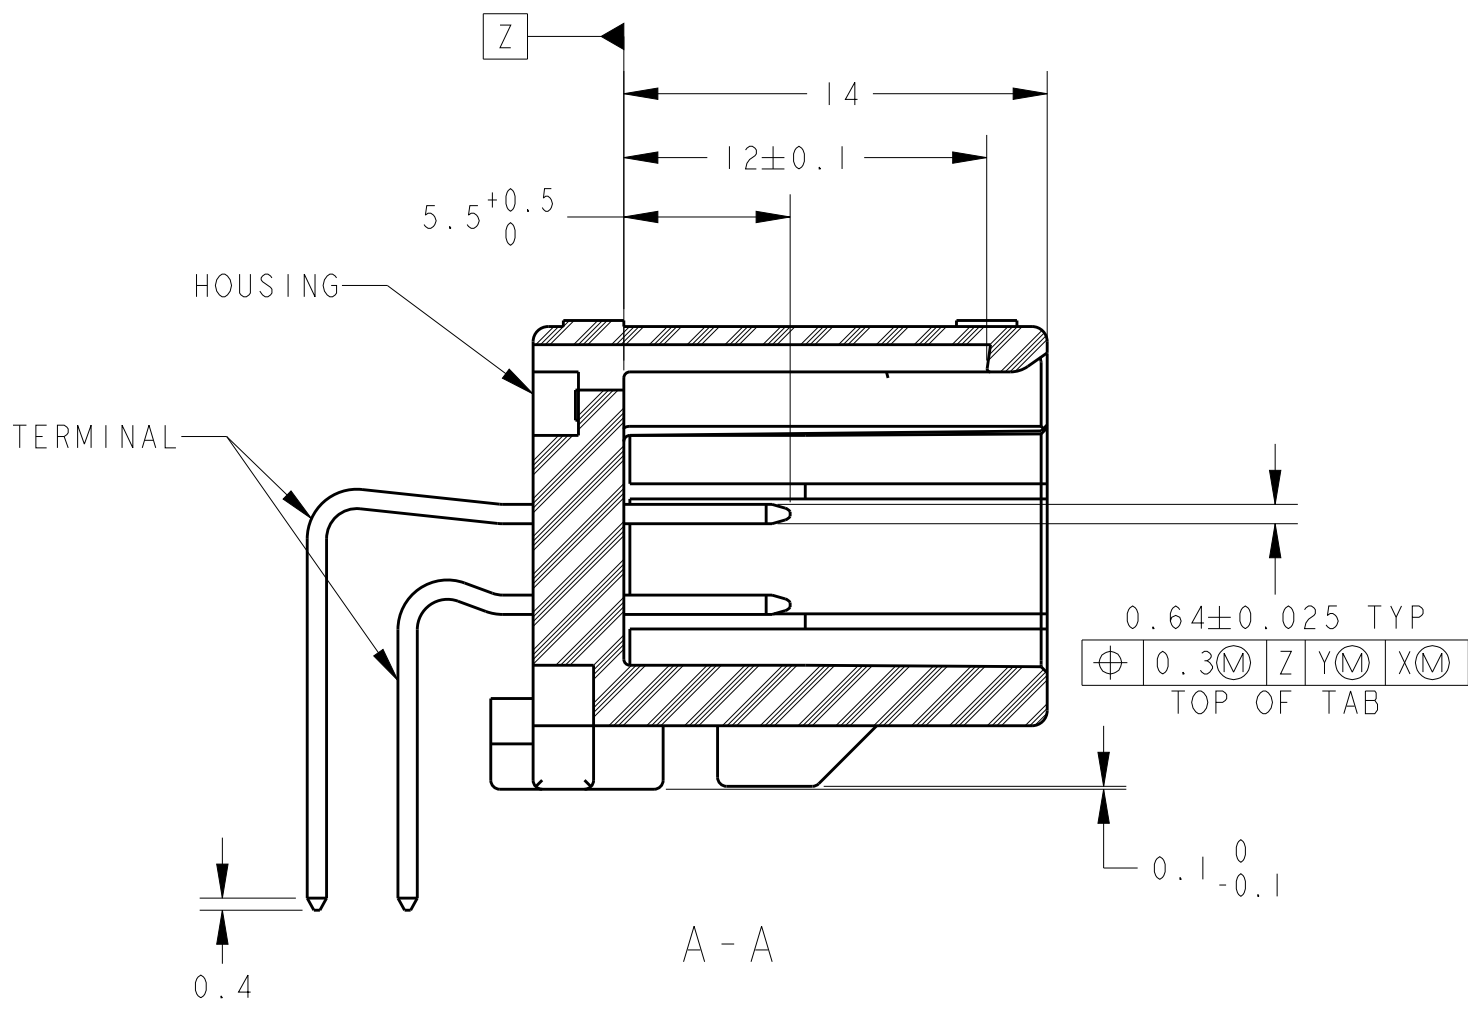
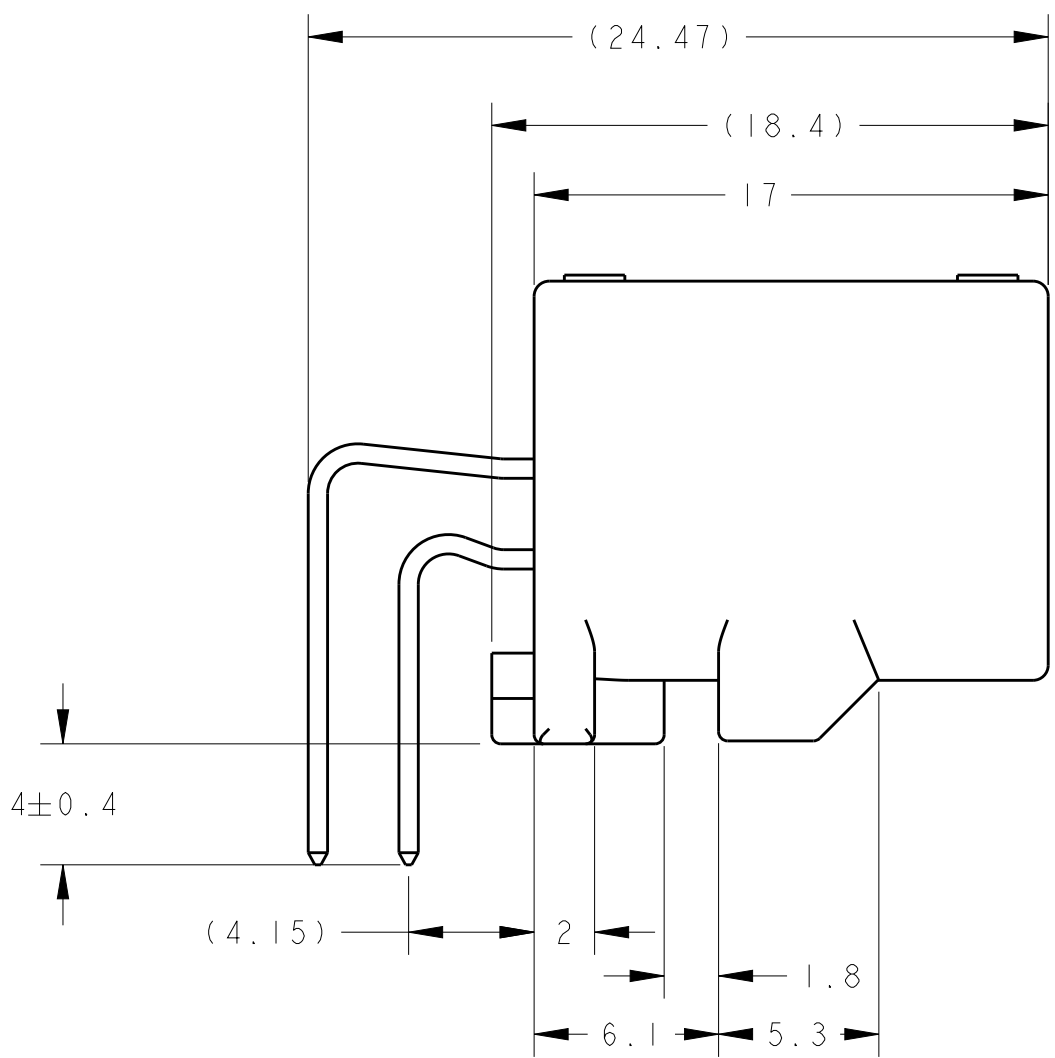
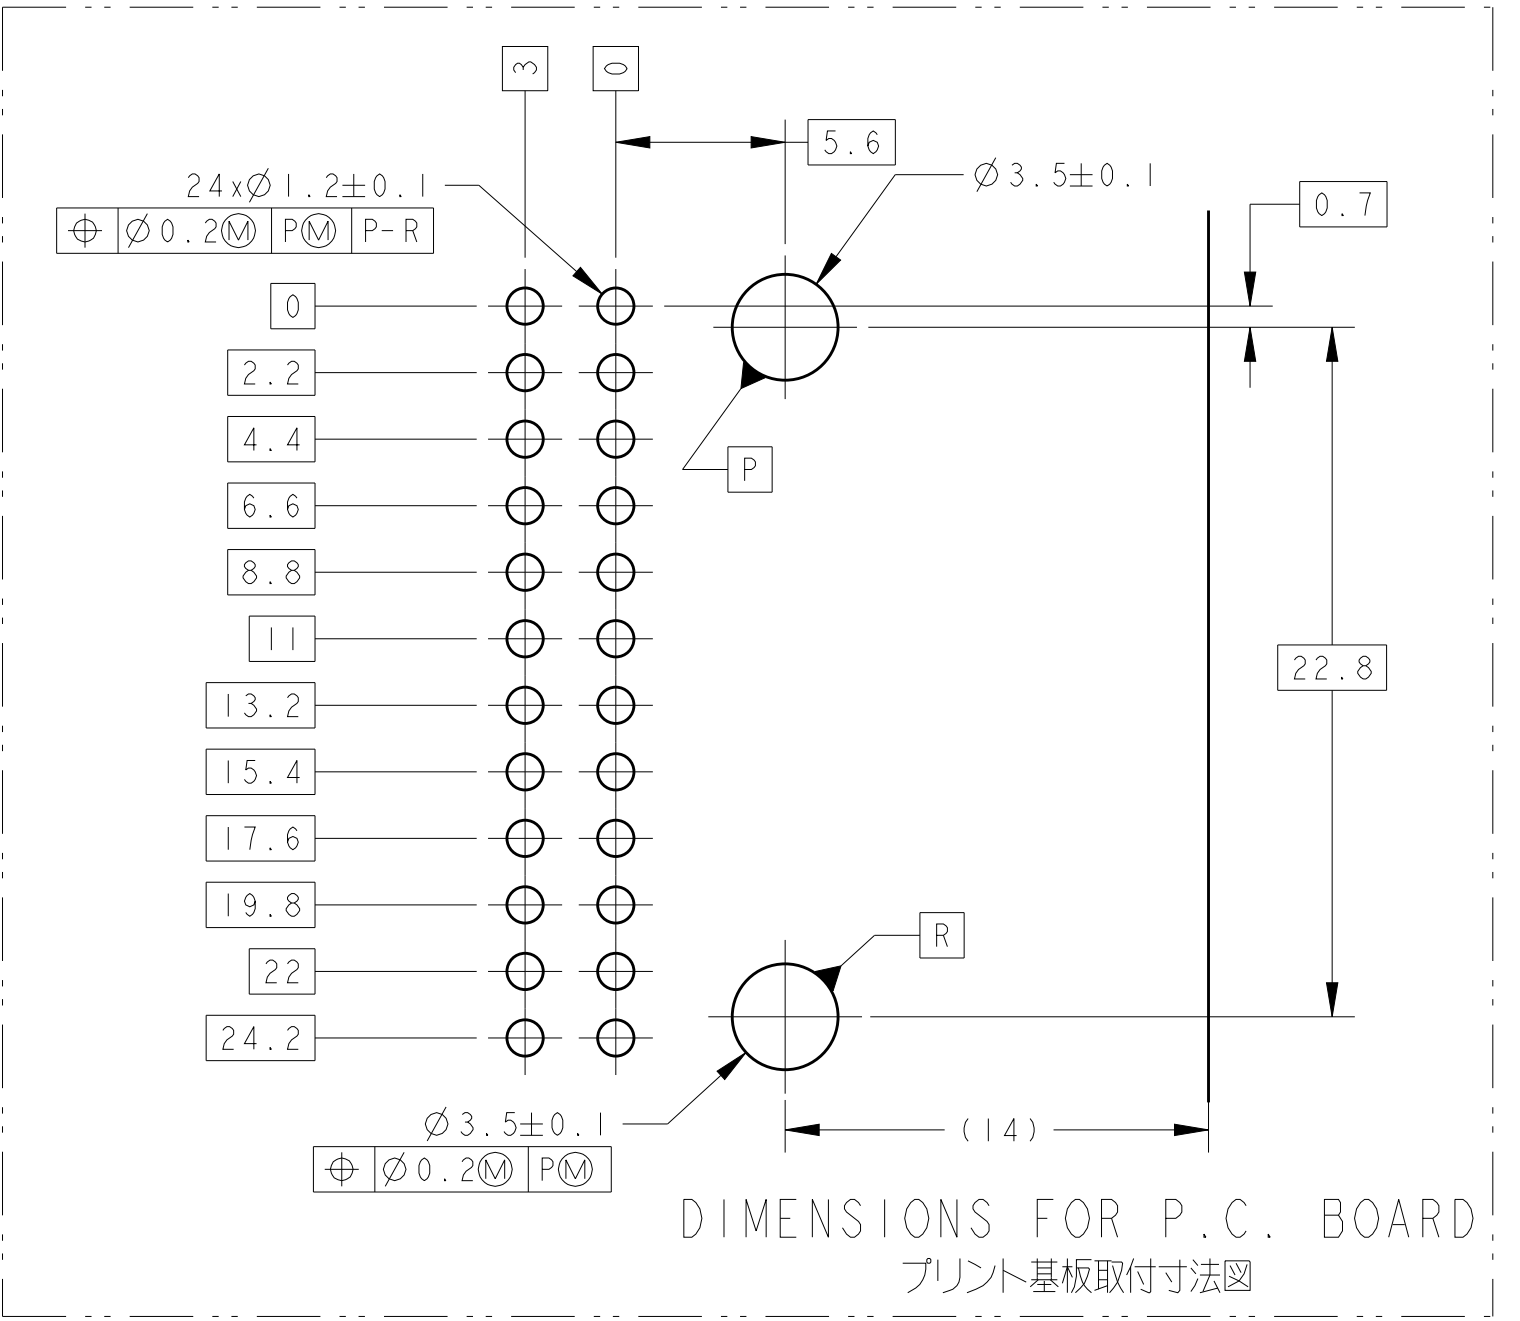
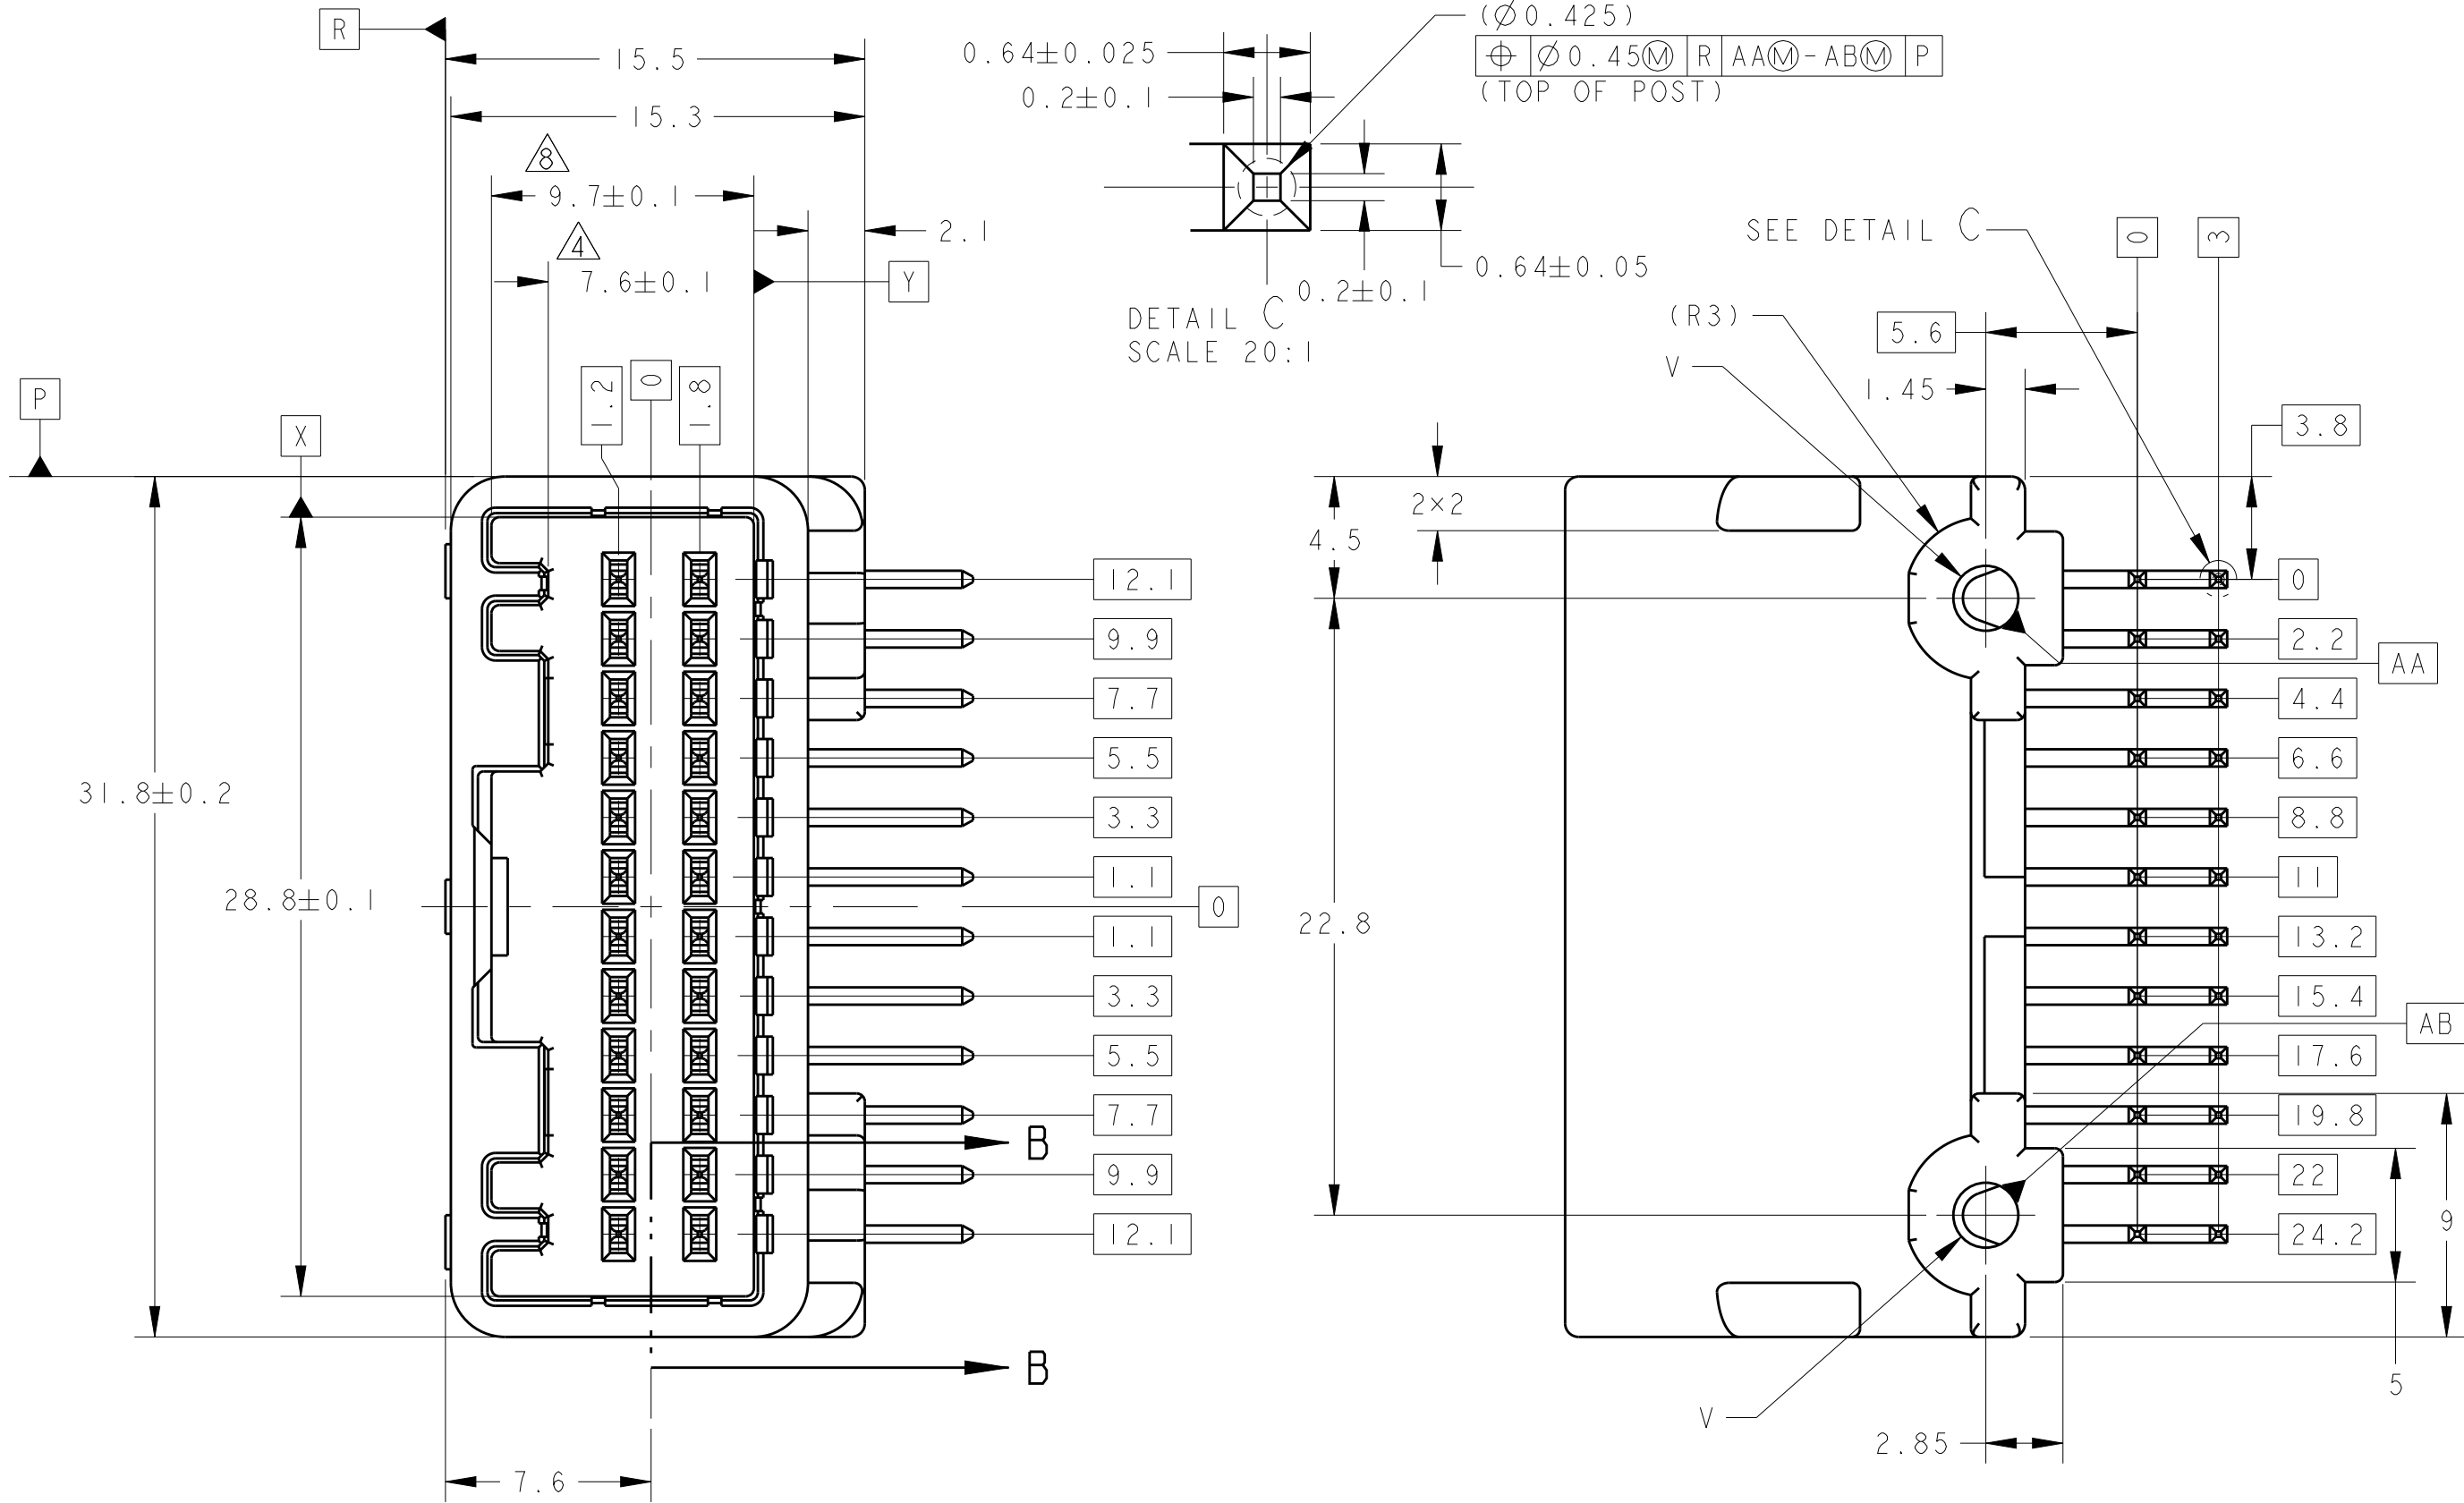
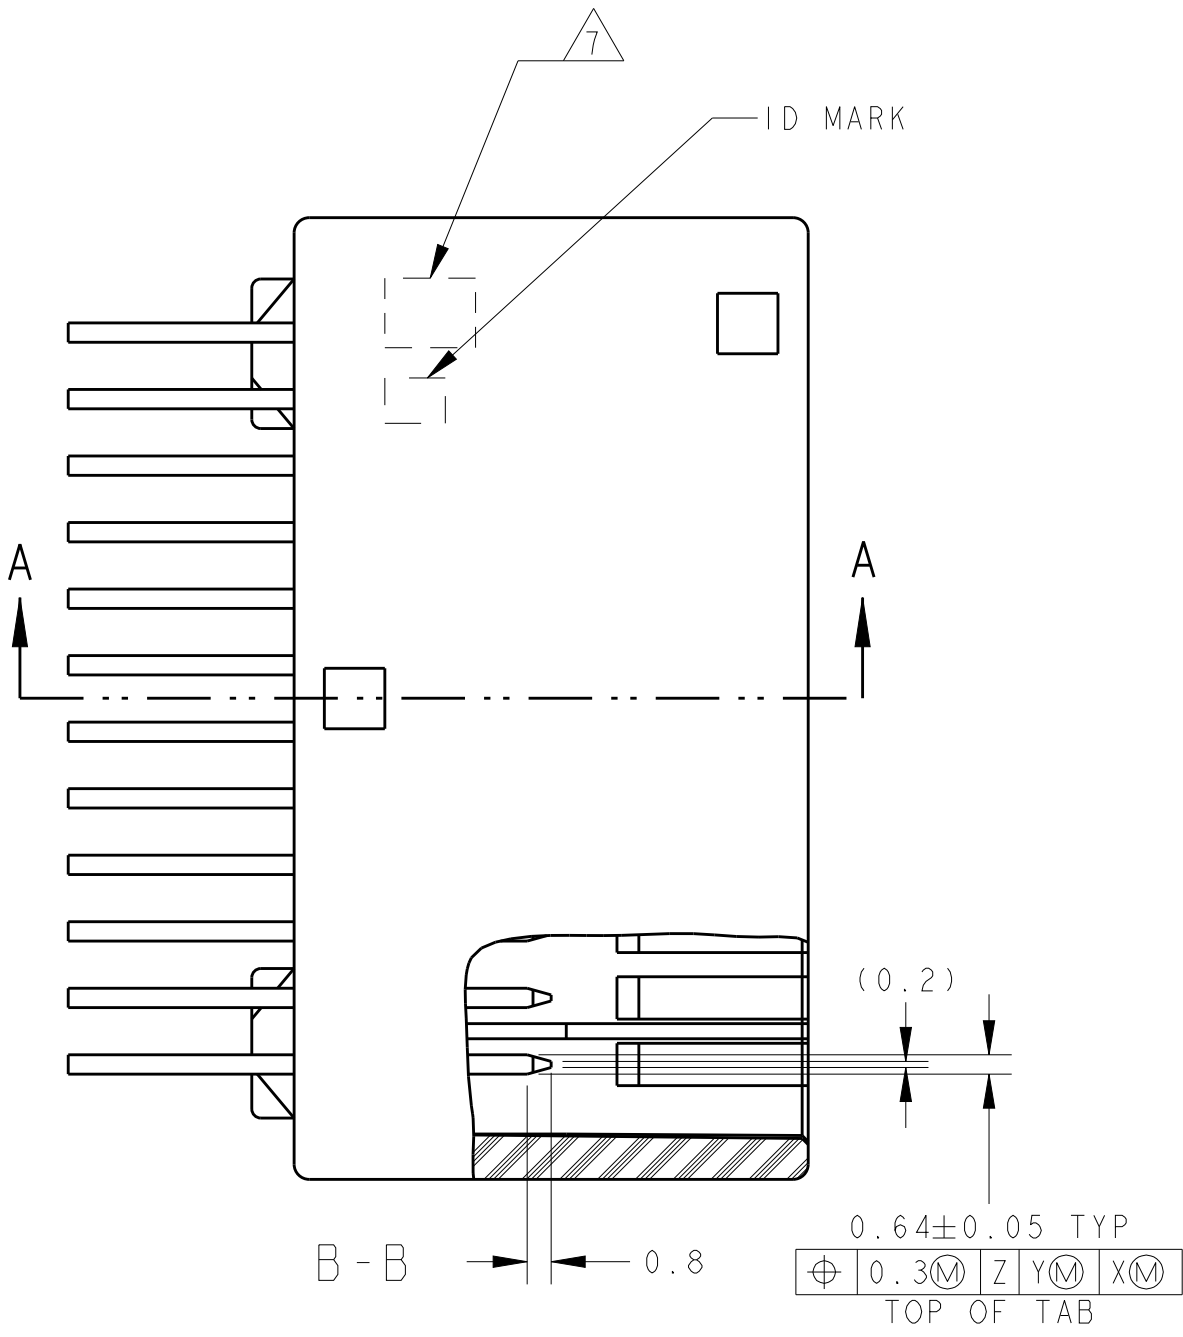


FIG. 1 回路番号
CIRCUIT NUMBER

1. PART NUMBER OF HOUSING TO BE MATE : SEE TABLE -1
TO BE MATED SMOOTHLY WITH THE PLUG HOUSING ASSEMBLY
 2. RECOMMENDED SCREW :
PAN-HEADED TYPE 2 TAPPING SCREW, NOMINAL DIAMETER 3mm,
LENGTH; SEE TABLE-3 (JIS B1115,B1122)
 3. FASTENING TORQUE FOR SCREW : 0.392N・m MAX
 4. MEASURED AT 6 mm FROM [-Z-]
 5. INSTRUCTION SHEET NO : 411-5928
 6. APPLIED TERMINAL : SEE TABLE -2
 7. IDENTIFICATION MARK FOR THE CONTACT FINISH ;
SEE TABLE
 8. MEASURED AT 2 mm FROM [-Z-]
 9. CIRCUIT NUMBER : SEE FIG.1
1. 嵌合相手ハウジングは TABLE -1参照
プラグハウジングアッセンブリと支障なく嵌合すること
 2. 推奨取付ねじ :
JIS B1115, B1122タッピングねじ
ねじ径 呼び径 3 , 長さ:TABLE-3参照
 3. ねじ締め付トルク : 0.392N・m最大
 4. [-Z-] 番から6mmの位置で測定
 5. 取扱い説明書 NO : 411-5928
 6. 適用端子は TABLE -2参照
 7. コンタクト仕上識別記号 ; 表参照
 8. [-Z-] 番から2mmの位置で測定
 9. 回路番号 : FIG.1 参照


TABLE -1	
POS 極数	PLUG HOUSING PART NO プラグハウジング 型番
24	1717112-3

TABLE -2	
TERMINAL NO 端子型番	
APPLICABLE WIRE RANGE (FEMALE) 適用電線 (メス)	
SIGNAL 0.64(11)	TIN
1674311-1	AVSS/CAVS/CAVUS/AVSSH-f 0.3~0.5mm ²

TABLE -3	
プリント基板板厚 (mm) THICKNESS OF PCB (mm)	1.2
固定用ねじ着下長さ (mm) NOMINAL LENGTH OF SCREW (mm)	5

6	5.6	∅2.63	PLASTIC BOX 通い箱	PLASTIC TUBE プラスチックチューブ	24	SELECTIVE-TIN (MATTE)	SELECTIVE-TIN × 24 (BRIGHT)	—//—	SPS GF17	NATURAL	3-1318853-4
6	5.6	∅2.63	PAPER BOX タンボール箱	PLASTIC TUBE プラスチックチューブ	24	SELECTIVE-TIN (MATTE)	SELECTIVE-TIN × 24 (BRIGHT)	—//—	SPS GF17	NATURAL	3-1318853-3
MARKING マーキング	WEIGHT (g) 質量	V	OUTER 分装	INNER 内装	TOTAL NUMBER OF CIRCUIT 回路総数	SOLDERING SIDE 半田付け側	CONTACT SIDE 接触部側	GOLD PLATED CIRCUIT NO (金めっき回路番号)	MATERIAL 材料	COLOR 色	PART NUMBER 製品型番
PACKING STYLE 梱包形態		CONTACT FINISH コンタクト仕上		THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T. SHINOHARA CHK H. YAMAGAMI APVD H. YAMAGAMI		06OCT2015		06OCT2015	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: mm		±0.3		PRODUCT SPEC		108-5668		APPLICATION SPEC	
MATERIAL 仕上		FINISH SEE TABLE		WEIGHT SEE TABLE		SIZE 114-5250		CAGE CODE DRAWING NO		RESTRICTED TO	
CONTACT-BRASS HOUSING:SEE TAB E		Customer Drawing		A100779		3-1318853-3		4:1		SHEET 1 OF 2	

LOC	DIST	REVISIONS					
J	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
			-	SEE SHEET 1	-	-	-

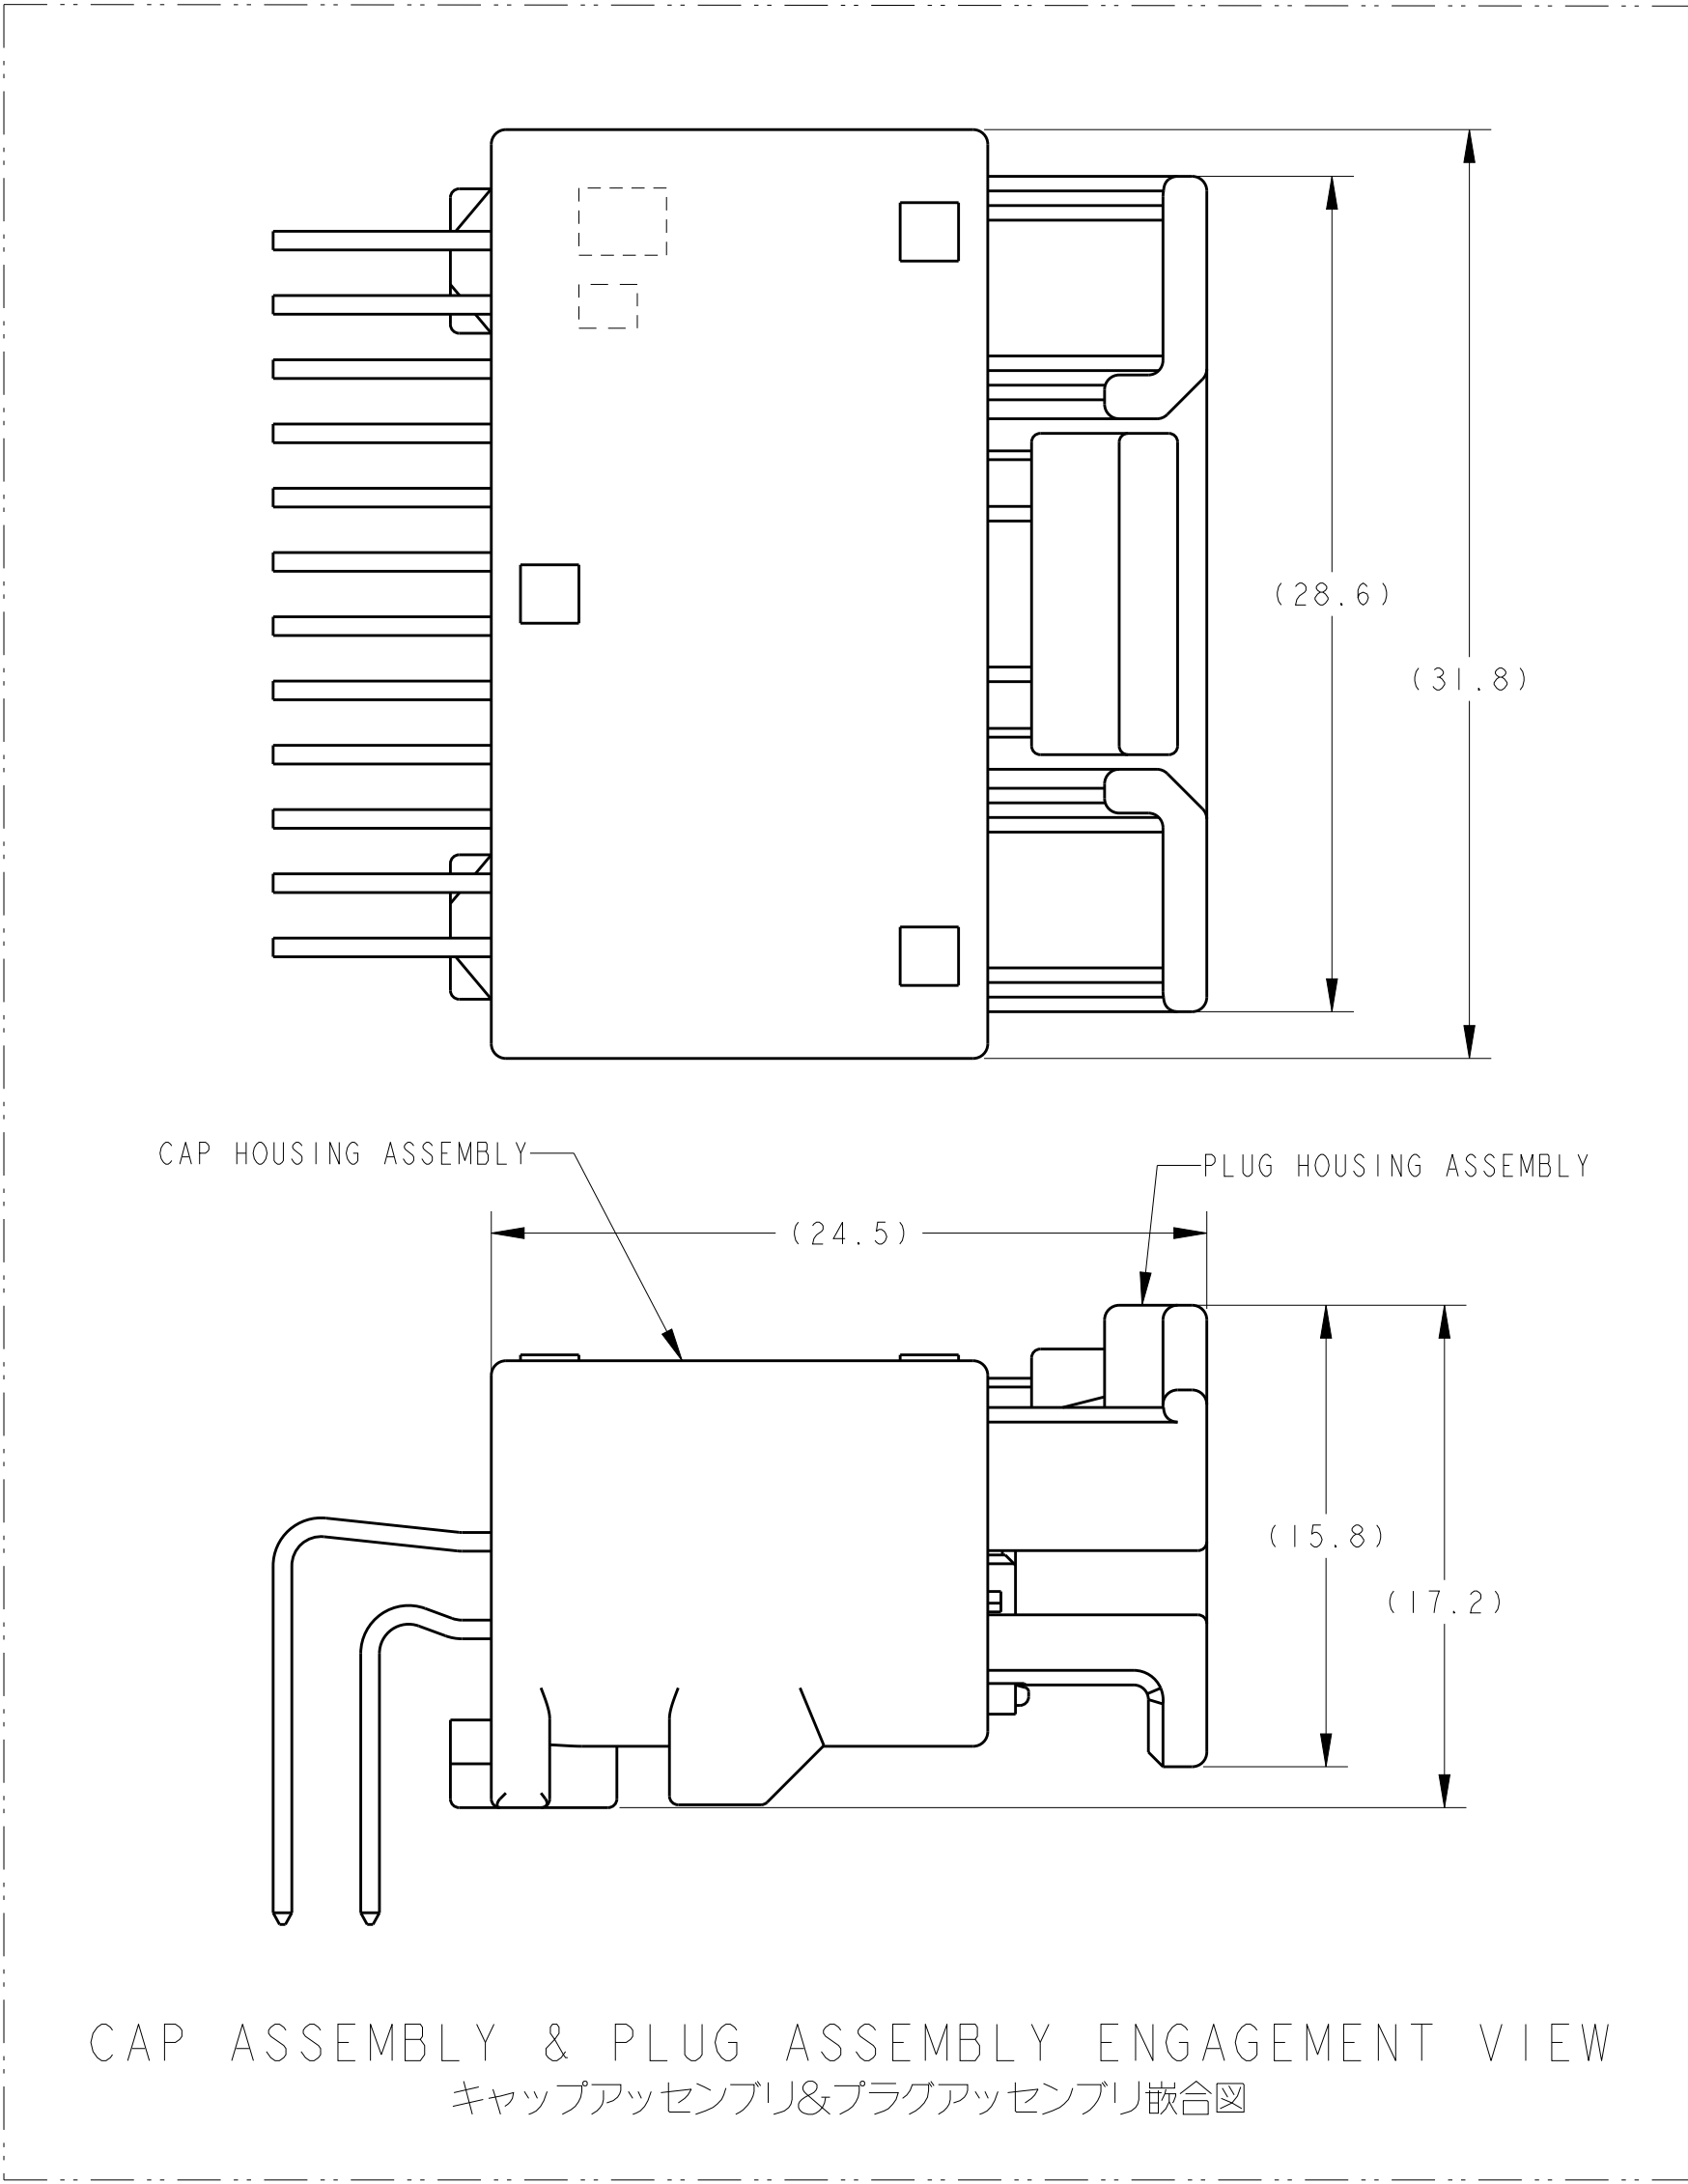

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL

-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±

1 PLC ±0.1

2 PLC ±0.05

3 PLC ±0.025

4 PLC ±0.0001

ANGLES ±

FINISH

DWN
CHK
APVD
PRODUCT SPEC
APPLICATION SPEC
WEIGHT
CUSTOMER DRAWING

TE Connectivity

NAME
025SERIES 24POSITION(PCB H-TYPE)
CAP HOUSING ASSEMBLY

SIZE
A2

CAGE CODE
-

DRAWING NO
C-3-1318853-3

RESTRICTED TO
-

SCALE
4:1

SHEET
2

OF
2

REV
A1

1471-9 (3/11)