


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
J	—		A1	REVISED	ECR-15-005055	01APR2015	TS KB

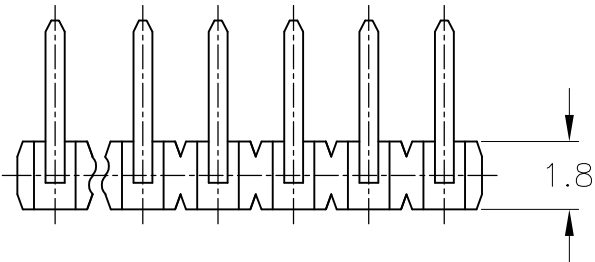

- △1.

NAME

JMI6LH-□□ACS

PLATING : S : Sn

NO. OF POSITIONS : N
2. TOLERANCE UNLESS SPECIFIED IN THE DRAWING :
±0.2 (POS 1~32)
3. MATERIAL
INSULATOR : GLASS FILLED POLYESTER
POST : COPPER ALLOY (TIN PLATED WITH Ni UNDER PLATING)
4. KINK IS MADE ON ALL POSTS.

- △1.



製品名称

JMI6LH-□□ACS

極数 : N


メッキ : S : すずメッキ

ポスト形状
2. 一般公差 : ±0.2 (極数 1~32)
3. 材質
インシュレータ : ガラス繊維入ポリエステル樹脂
ポスト : ニッケル下地すずめっき付き黄銅
4. インシュレータ端部形状は、一部図示形状と異なる場合がある。
5. 本製品の仕様は、製品仕様書 108-78034 による。

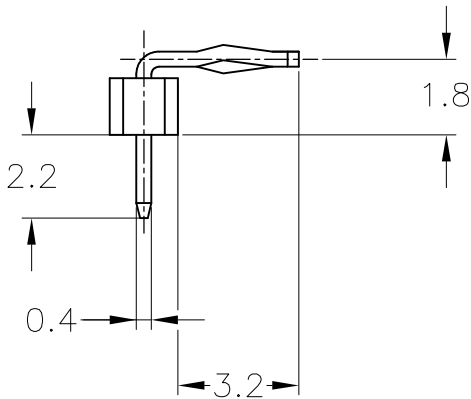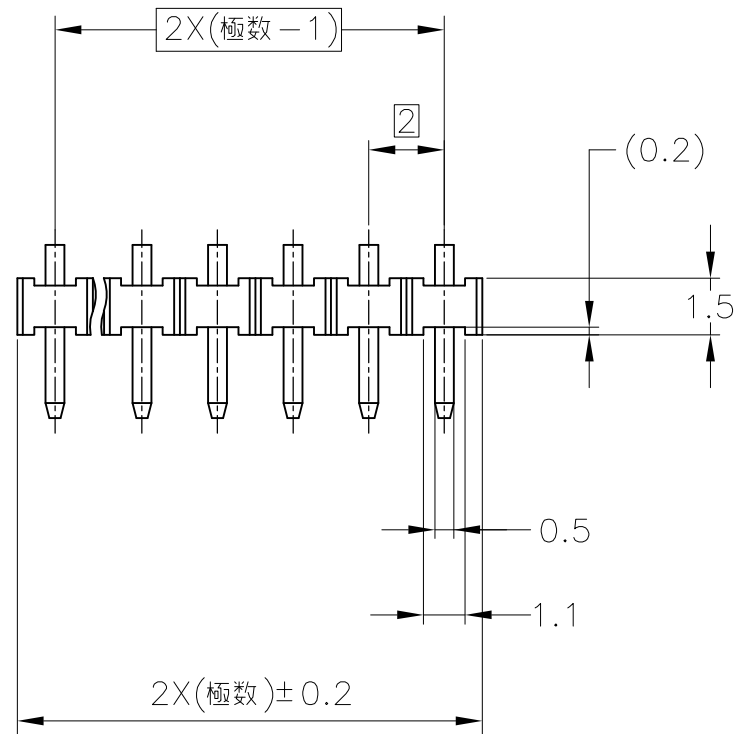

JMI6LH-□□ACS

OBSOLETE	6-6447226-8	JMI6LH-18ACS	18	ONE SIDE KINK 片側キンク
	1-6447226-0	JMI6LH-12ACS	12	
	9-6447225-7	JMI6LH-11ACS	11	
	6-6447225-8	JMI6LH-09ACS	9	
	5-6447225-5	JMI6LH-08ACS	8	
	4-6447225-2	JMI6LH-07ACS	7	
OBSOLETE	2-6447225-6	JMI6LH-06ACS	6	
	1-6447225-0	JMI6LH-05ACS	5	
OBSOLETE	9-6447224-2	JMI6LH-04ACS	4	
	7-6447224-8	JMI6LH-03ACS	3	
PART NUMBER 型 番		△1. NAME 製品名称	Pos. (N) 極数 (N)	REMARKS 備考

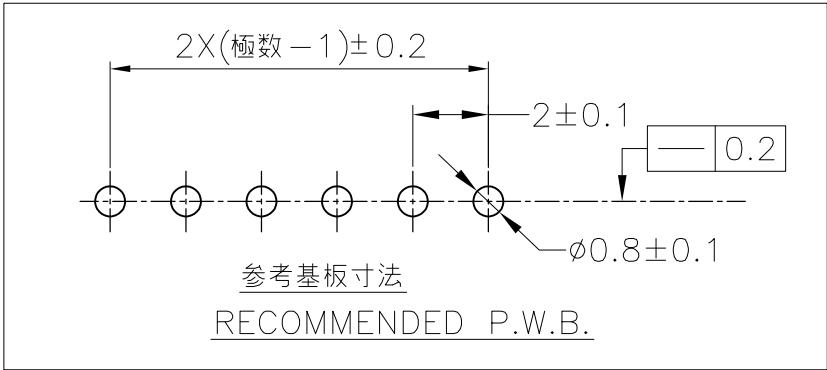

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
単位: 耗
mm

0 PLC ± -

1 PLC ± -

2 PLC ± -

3 PLC ± -

4 PLC ± -

ANGLES ± -

FINISH
仕上

TOLERANCES UNLESS
OTHERWISE SPECIFIED:
一般公差

0 PLC ± -

1 PLC ± -

2 PLC ± -

3 PLC ± -

4 PLC ± -

ANGLES ± -

FINISH
仕上

DWN
T.SHINOHARA
04OCT07

CHK
K.BETSUI
04OCT07

APVD
K.BETSUI
04OCT07

PRODUCT SPEC
製品規格
108-78034

APPLICATION SPEC
取付適用規格

WEIGHT

CUSTOMER DRAWING

TE Connectivity

MICROHEADER (6LH SERIES) 2mm PITCH
RIGHTANGLED TYPE INSULATOR HEIGHT1.5

SIZE
A3

CAGE CODE
00779

DRAWING NO
番号
C-1827673

RESTRICTED TO
—

SCALE
尺度
5:1

SHEET
1 OF 1

REV
A1

1470-19 (3/11)