



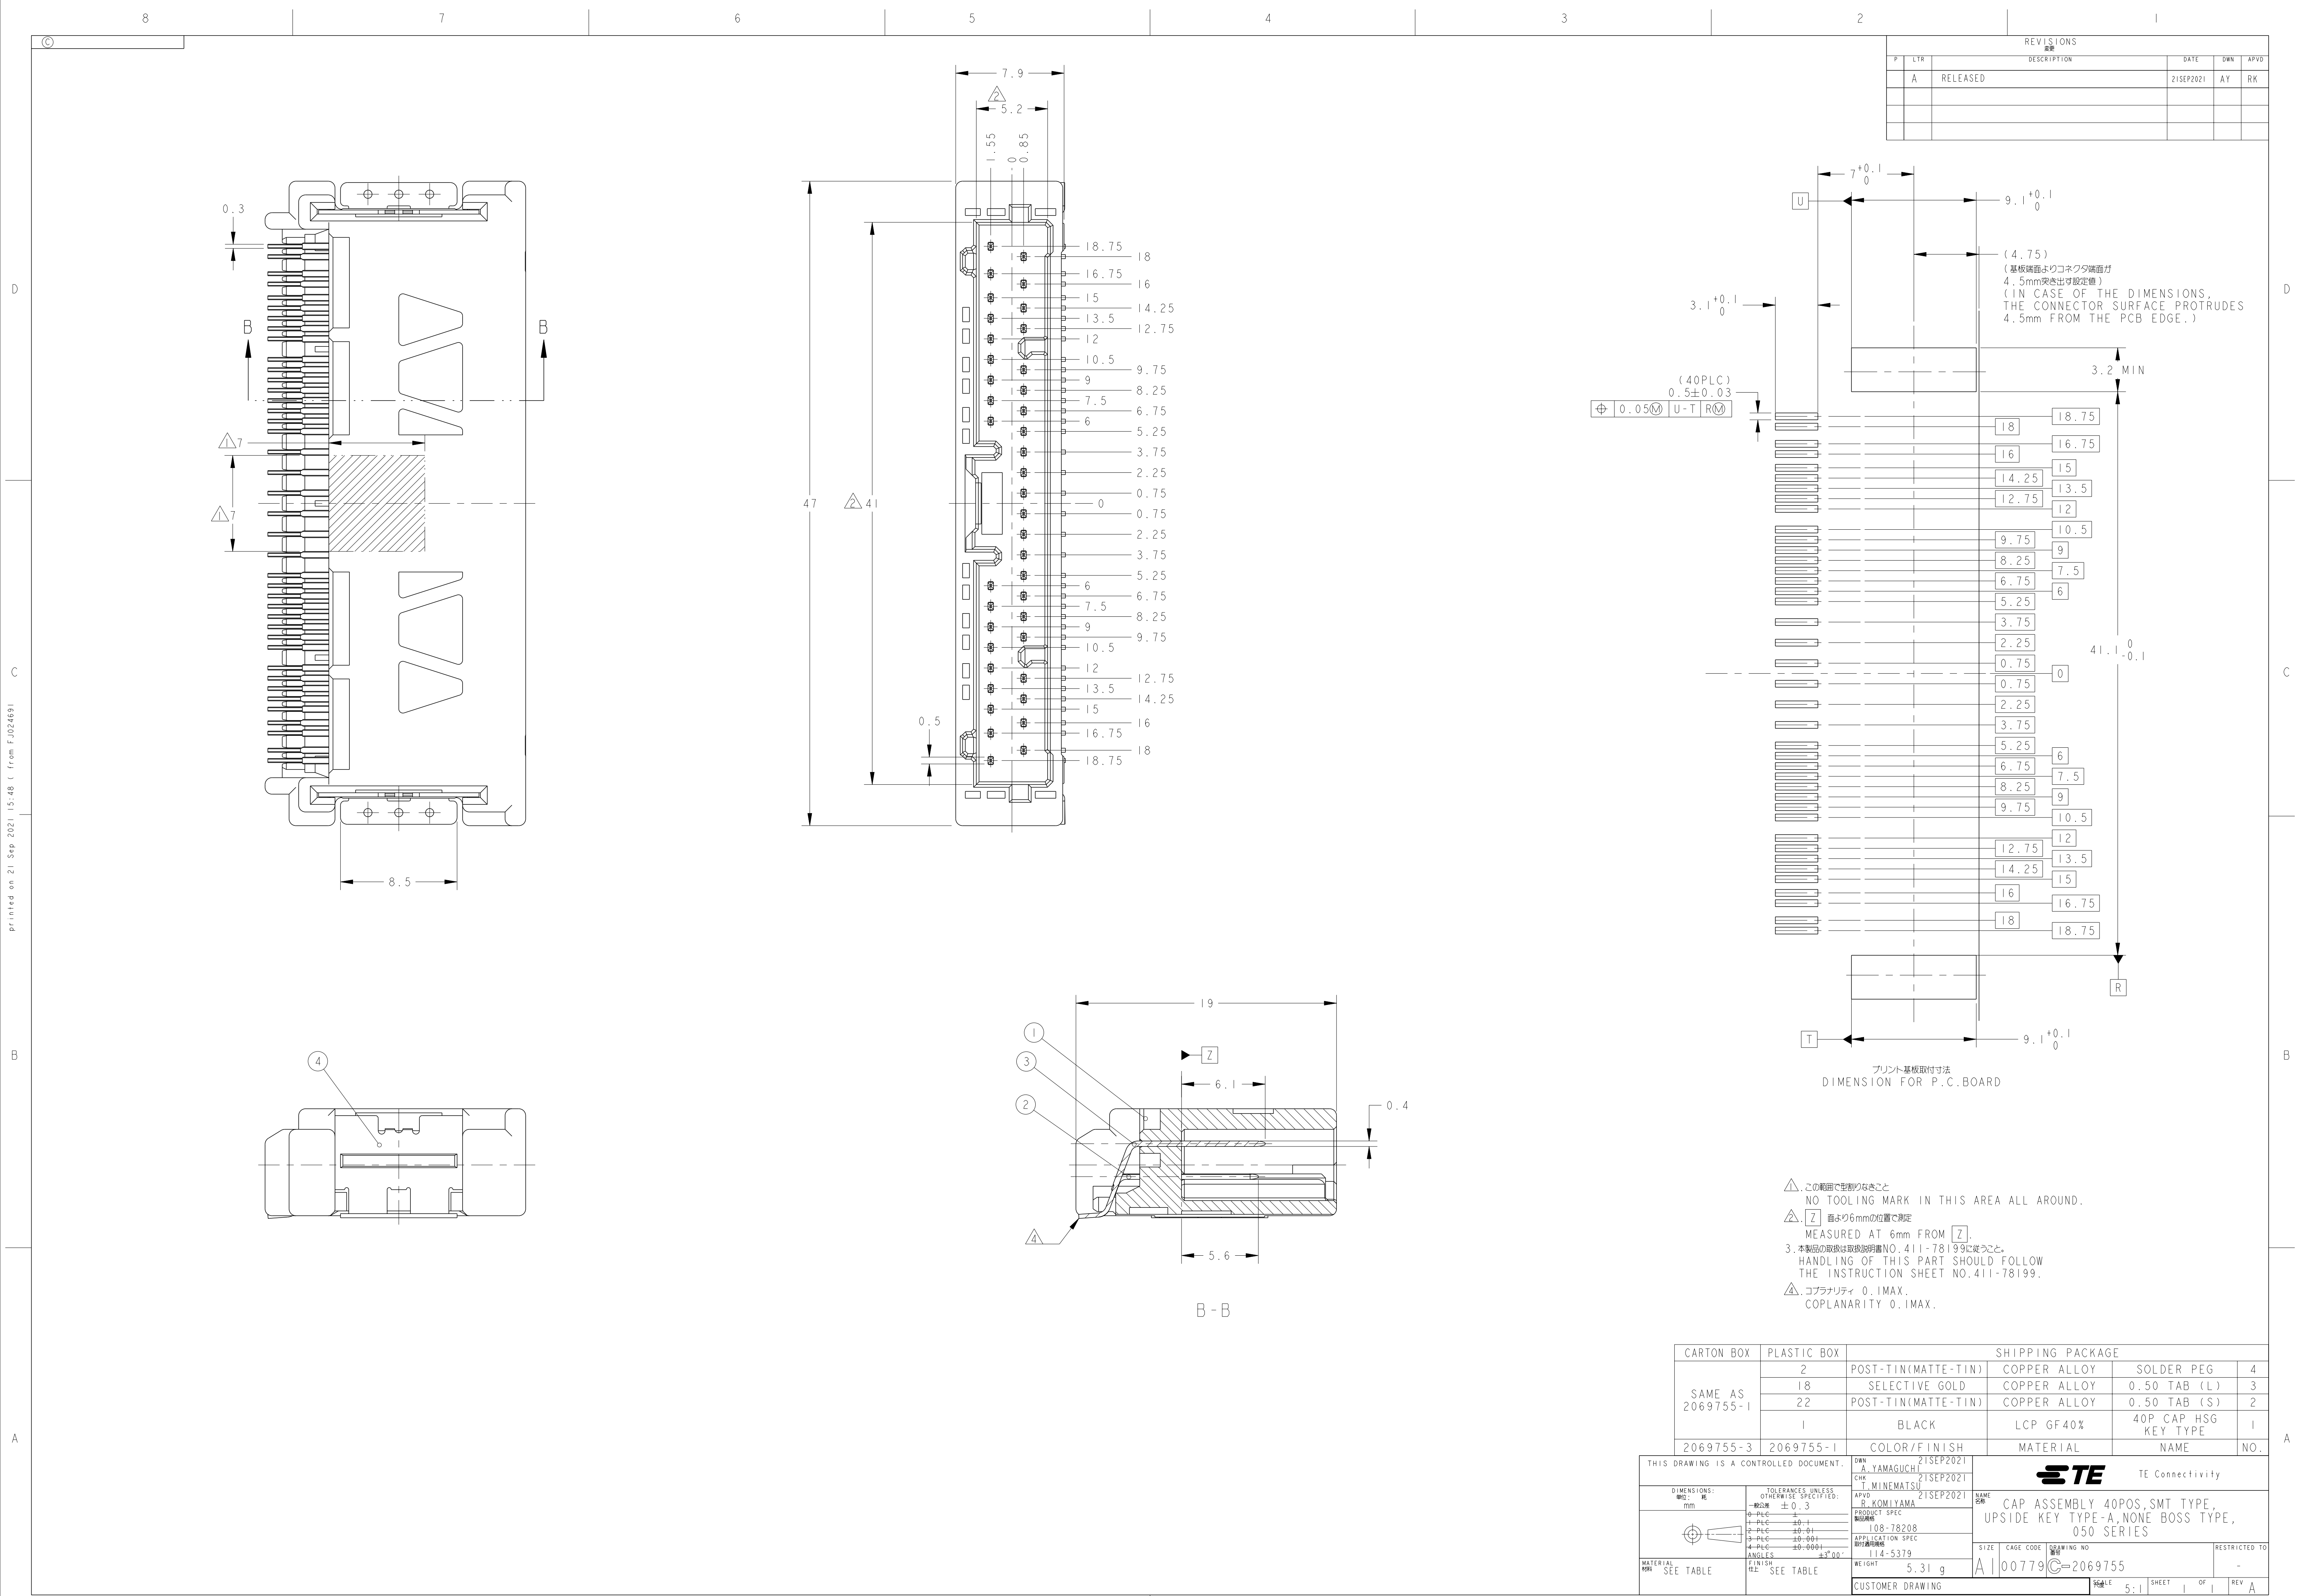

REVISIONS					
REV	DATE	DESCRIPTION	BY	CHK	APP
A	21SEP2021	RELEASED	AY	RK	

(40PLC)
0.5±0.03

0.05 (M) U-T (R)

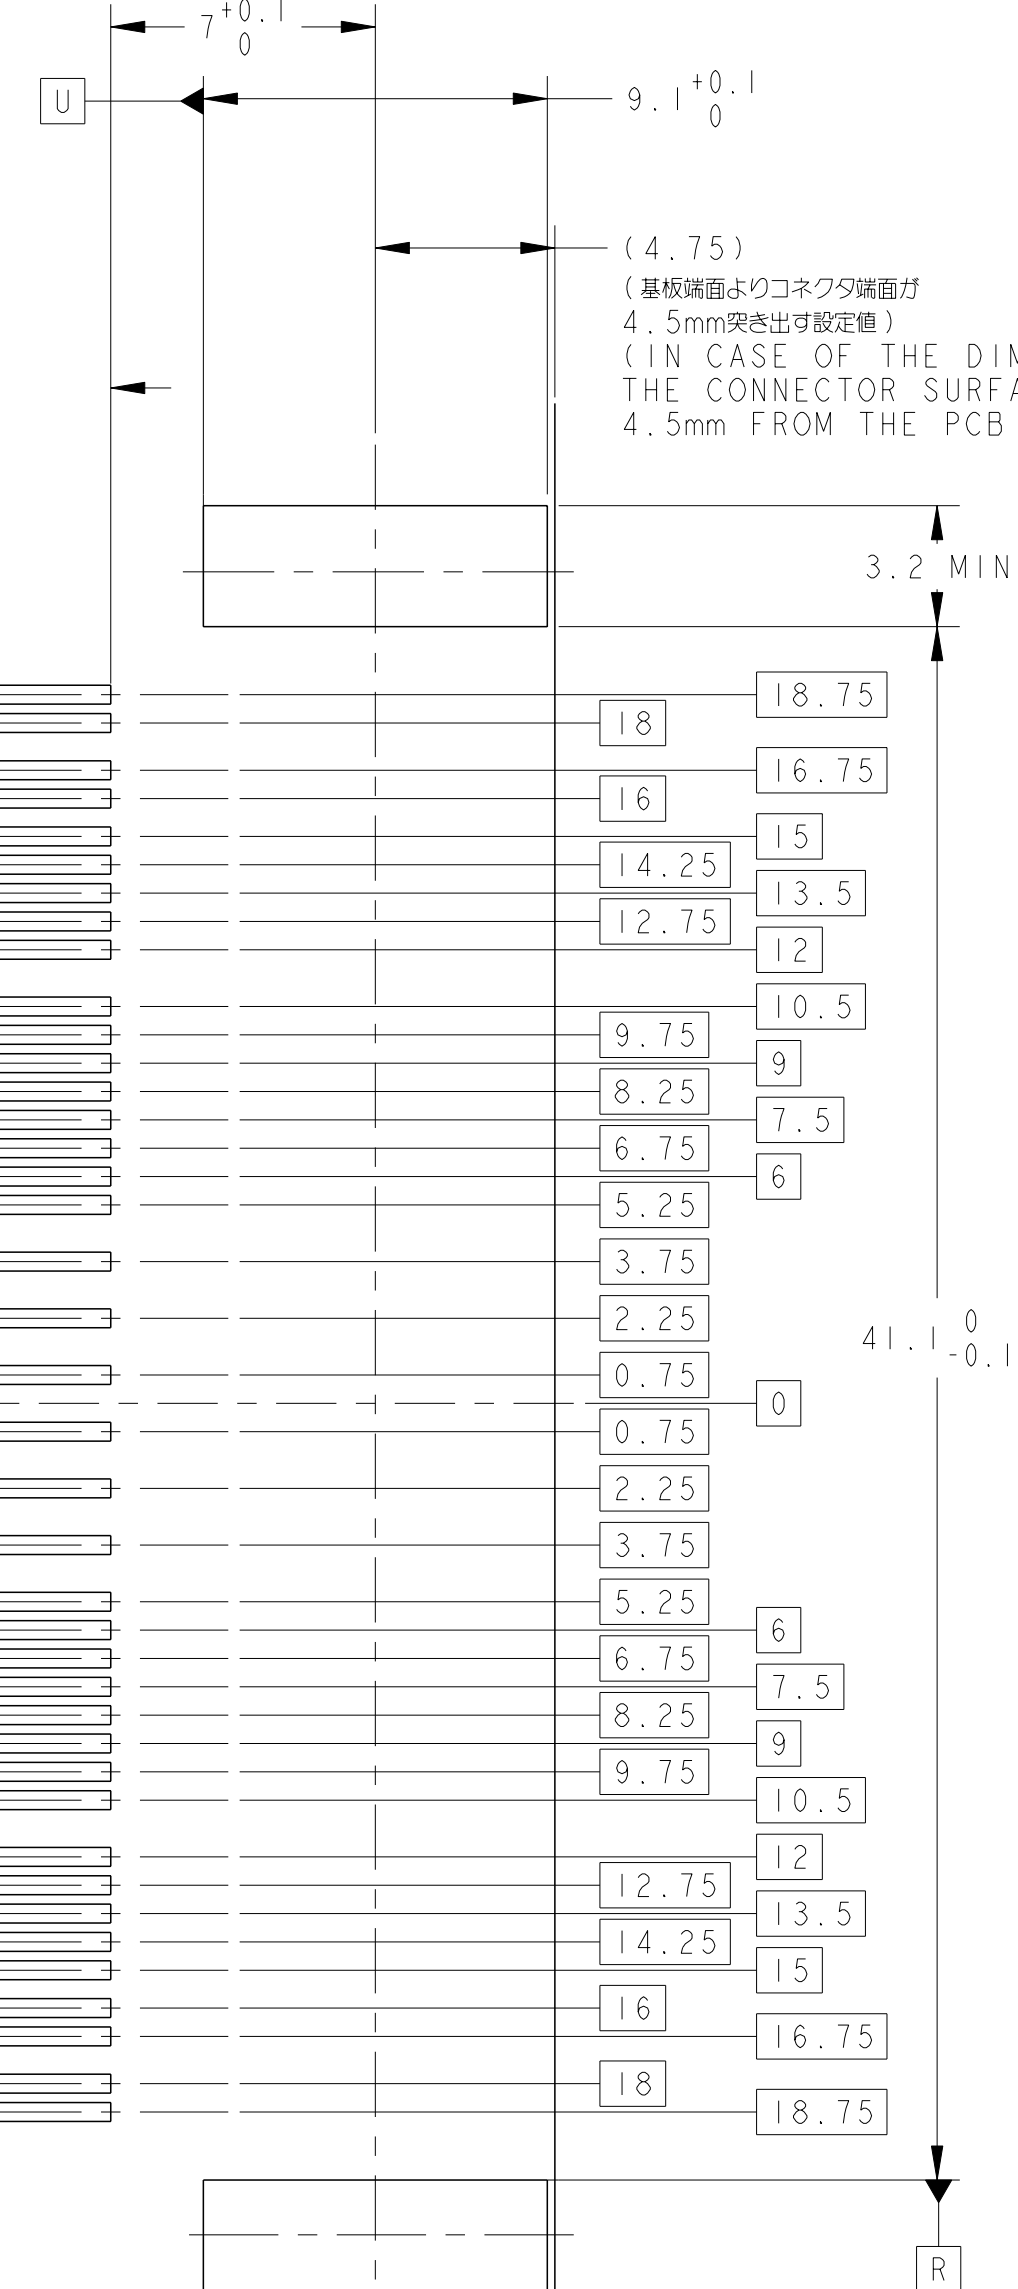

プリント基板取付法
DIMENSION FOR P.C. BOARD

- △.この範囲で型割りなきこと
NO TOOLING MARK IN THIS AREA ALL AROUND.
- △. [Z] 面より6mmの位置で測定
MEASURED AT 6mm FROM [Z].
- 3. 本製品の取扱は取扱説明書NO.411-78199に従うこと。
HANDLING OF THIS PART SHOULD FOLLOW
THE INSTRUCTION SHEET NO.411-78199.
- △.コプラナリティ 0.1MAX.
COPLANARITY 0.1MAX.

CARTON BOX	PLASTIC BOX	SHIPPING PACKAGE			
SAME AS 2069755-1	2	POST-TIN(MATTE-TIN)	COPPER ALLOY	SOLDER PEG	4
	18	SELECTIVE GOLD	COPPER ALLOY	0.50 TAB (L)	3
	22	POST-TIN(MATTE-TIN)	COPPER ALLOY	0.50 TAB (S)	2
	1	BLACK	LCP GF40%	40P CAP HSG KEY TYPE	1
2069755-3	2069755-1	COLOR/FINISH	MATERIAL	NAME	NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN A. YAMAGUCHI CHK R. KOMIYAMA T. MINEMATSU	21SEP2021	TE TE Connectivity	
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: mm	APVD R. KOMIYAMA	21SEP2021		
0-PLC ±0.3	1-PLC ±0.1	PRODUCT SPEC	108-78208		
2-PLC ±0.01	3-PLC ±0.001	APPLICATION SPEC	114-5379		
4-PLC ±0.0001	ANGLES ±3°00'	FINISH	WEIGHT	SIZE	CAGE CODE
MATERIAL SEE TABLE	FINISH SEE TABLE	114-5379	5.31 g	A100779	2069755
CUSTOMER DRAWING		DRAWING NO.		RESTRICTED TO	
		5:1		SHEET 1 OF 1	
				REV A	