
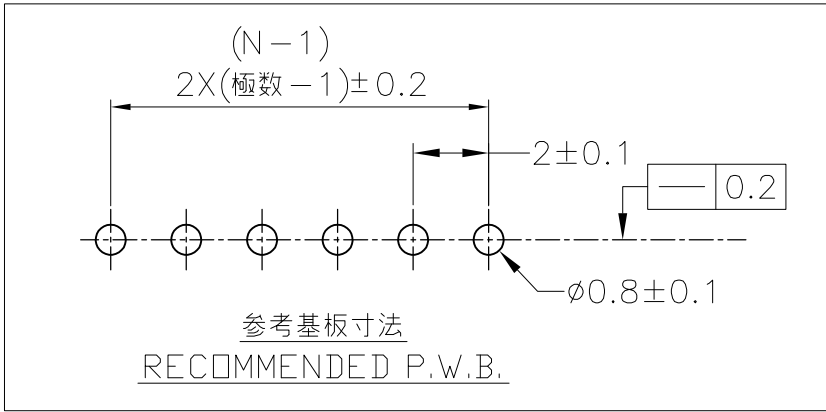
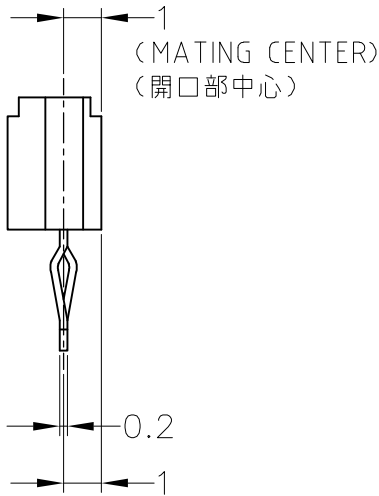
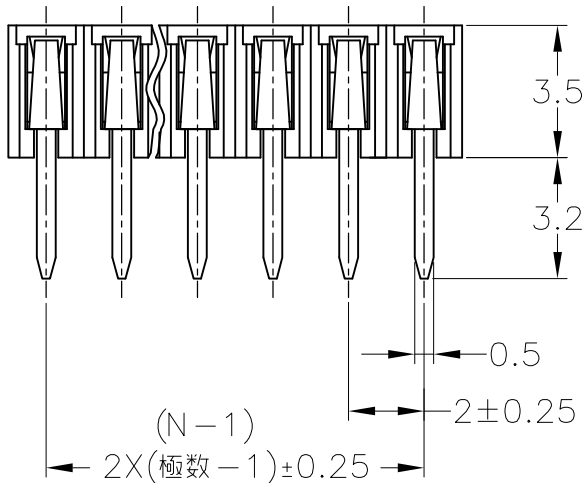


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
J	—		A1	REVISED	ECR-15-005055	01APR2015	TS KB

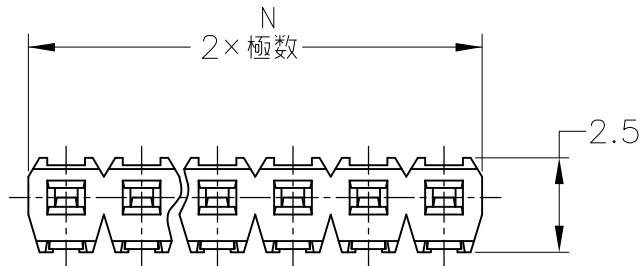

- △

NAME

JMI6LS-□□BAS

NO. OF POSITIONS : N
2. GENERAL TOLERANCE : ±0.2
3. MATERIAL
- INSULATOR : GLASS FILLED P.P.S. RESIN
- CONTACT : PLATED PHOSPHOR BRONZ (TIN PLATED WITH Ni UNDER PLATING)
4. KINK IS MADE ON ALL POSITIONS
5. RECOMMENDED LEAD WIRE: WIDTH 0.35~0.55, THICKNESS 0.4±0.03

- △

製品名称

JMI6LS-□□BAS

極数 : N

2. 一般公差 : ±0.2
3. 材質
- インシュレータ : ガラス繊維入PPS樹脂
- ポスト : ニッケル下地すずめっき付きバネ用リン青銅
4. キンク加工は、交互に全極行う。
5. 適合リード形状 : 幅0.35~0.55, 厚さ0.4±0.03

OBSOLETE	9-6447227-7	JMI6LS-24BAS	24	STRAIGHT TYPE ストレート タイプ
OBSOLETE	8-6447227-7	JMI6LS-17BAS	17	
	8-6447227-5	JMI6LS-16BAS	16	
	8-6447227-3	JMI6LS-15BAS	15	
OBSOLETE	7-6447227-3	JMI6LS-12BAS	12	
	7-6447227-0	JMI6LS-11BAS	11	
	6-6447227-8	JMI6LS-10BAS	10	
	6-6447227-4	JMI6LS-09BAS	9	
	6-6447227-1	JMI6LS-08BAS	8	
	5-6447227-8	JMI6LS-07BAS	7	
	5-6447227-4	JMI6LS-06BAS	6	
	5-6447227-1	JMI6LS-05BAS	5	
	4-6447227-7	JMI6LS-04BAS	4	
OBSOLETE	4-6447227-4	JMI6LS-03BAS	3	
OBSOLETE	4-6447227-0	JMI6LS-02BAS	2	
PART NUMBER 型 番		△ NAME 製品名称	Pos. (N) 極数 (N)	REMARKS 備考

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T.SHINOHARA	04OCT07	 TE Connectivity		
		CHK K.BETSUI	04OCT07			
		APVD K.BETSUI	04OCT07	NAME 名称		
		PRODUCT SPEC 製品規格	108-78036	MICROSOCKET (6LS SERIES) 2mm PITCH STRAIGHT ASSEMBLY		
		APPLICATION SPEC 取付適用規格		SIZE	CAGE CODE	DRAWING NO 番号
		WEIGHT		A3	00779	C-1827608
CUSTOMER DRAWING		SCALE 尺度	5:1	SHEET 1 OF 1	REV A1	