


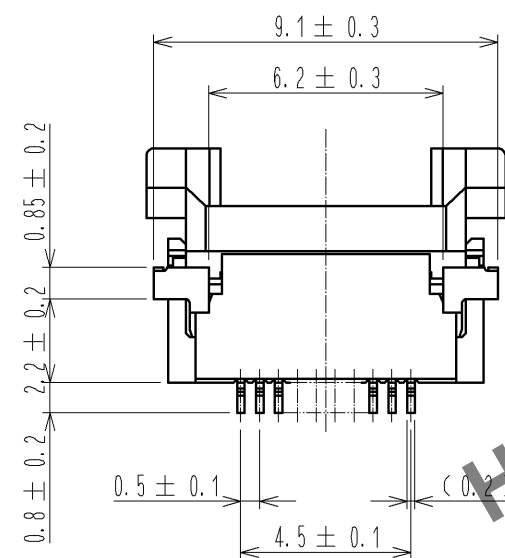


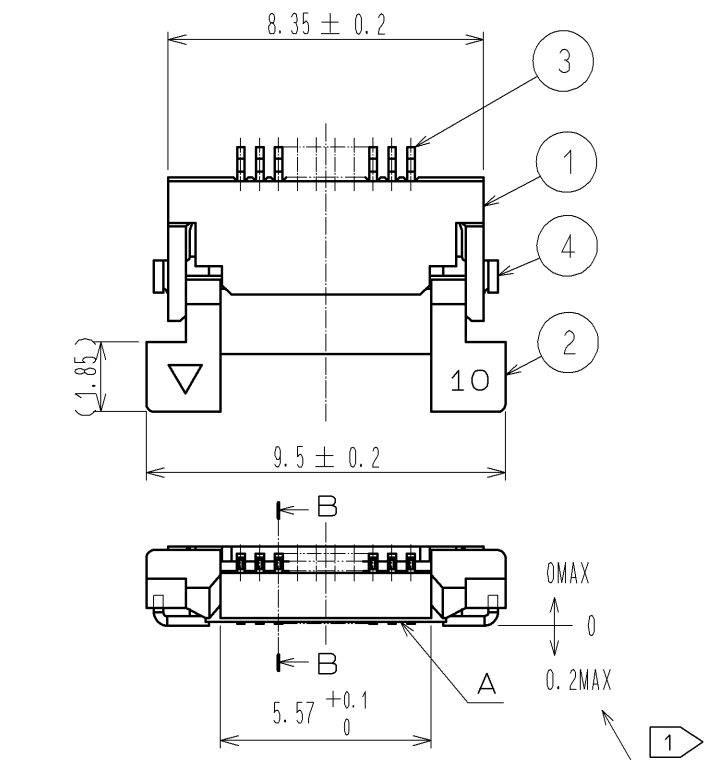


B-B (10 : 1)

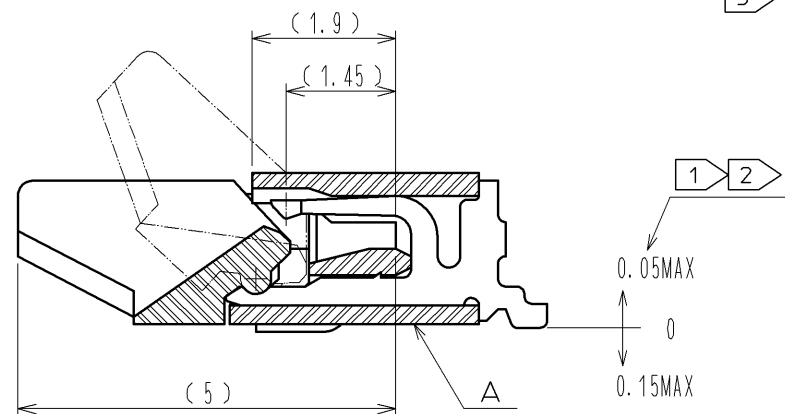


- NOTE
- 1 REFERENCE IS A.
 - 2 LEAD CO-PLANARITY SHALL BE 0.1 MAX.
 - 3 THICKNESS OF SUPPORTING TAPE SHALL BE 0.188(7.5mil) MIN.

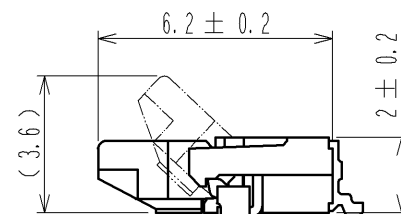

RECOMMENDED FPC, FFC

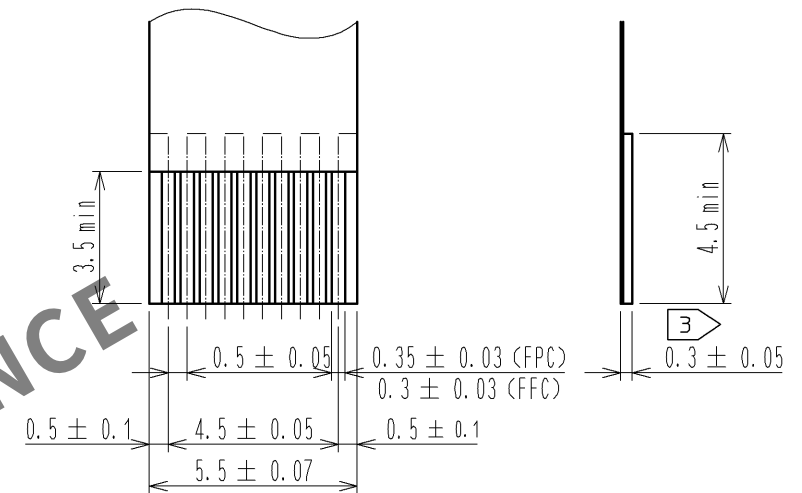


RECOMMENDED LAND PATTERN, METAL MASK

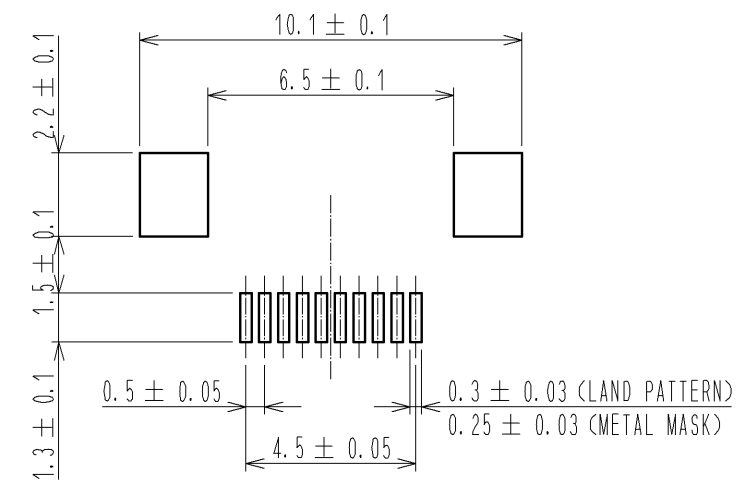

RECOMMENDED METAL MASK THICKNESS t=0.15

4	BRASS	TIN PLATING 1μmMIN OVER NICKEL 1μmMIN.	8	(CONNECTOR)	
3	PHOSPHOR BRONZE	GOLD PLATING 0.05μmMIN OVER NICKEL 1μmMIN.	7	POLYSTYRENE	
2	PPS	(DEEP BROWN) UL94V-0	6	POLYESTER	
1	POLYAMIDE	(BEIGE) UL94V-0	5	POLYSTYRENE	
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 5 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-F-002766	
DESIGNED MK. YASUMI		CHECKED HS. SAKAMOTO		DATE 09. 11. 17	
APPROVED : RI. TAKAYASU		07. 02. 05		DRAWING NO. EDC3-150550-51	
CHECED : TN. KUWATA		07. 02. 05		PART NO. FH12A-10S-0. 5SH(55)	
DESIGNED : MK. YASUMI		07. 02. 02		CODE NO. CL586-0550-9-55	
DRAWN : MK. YASUMI		07. 02. 02			

Sep.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

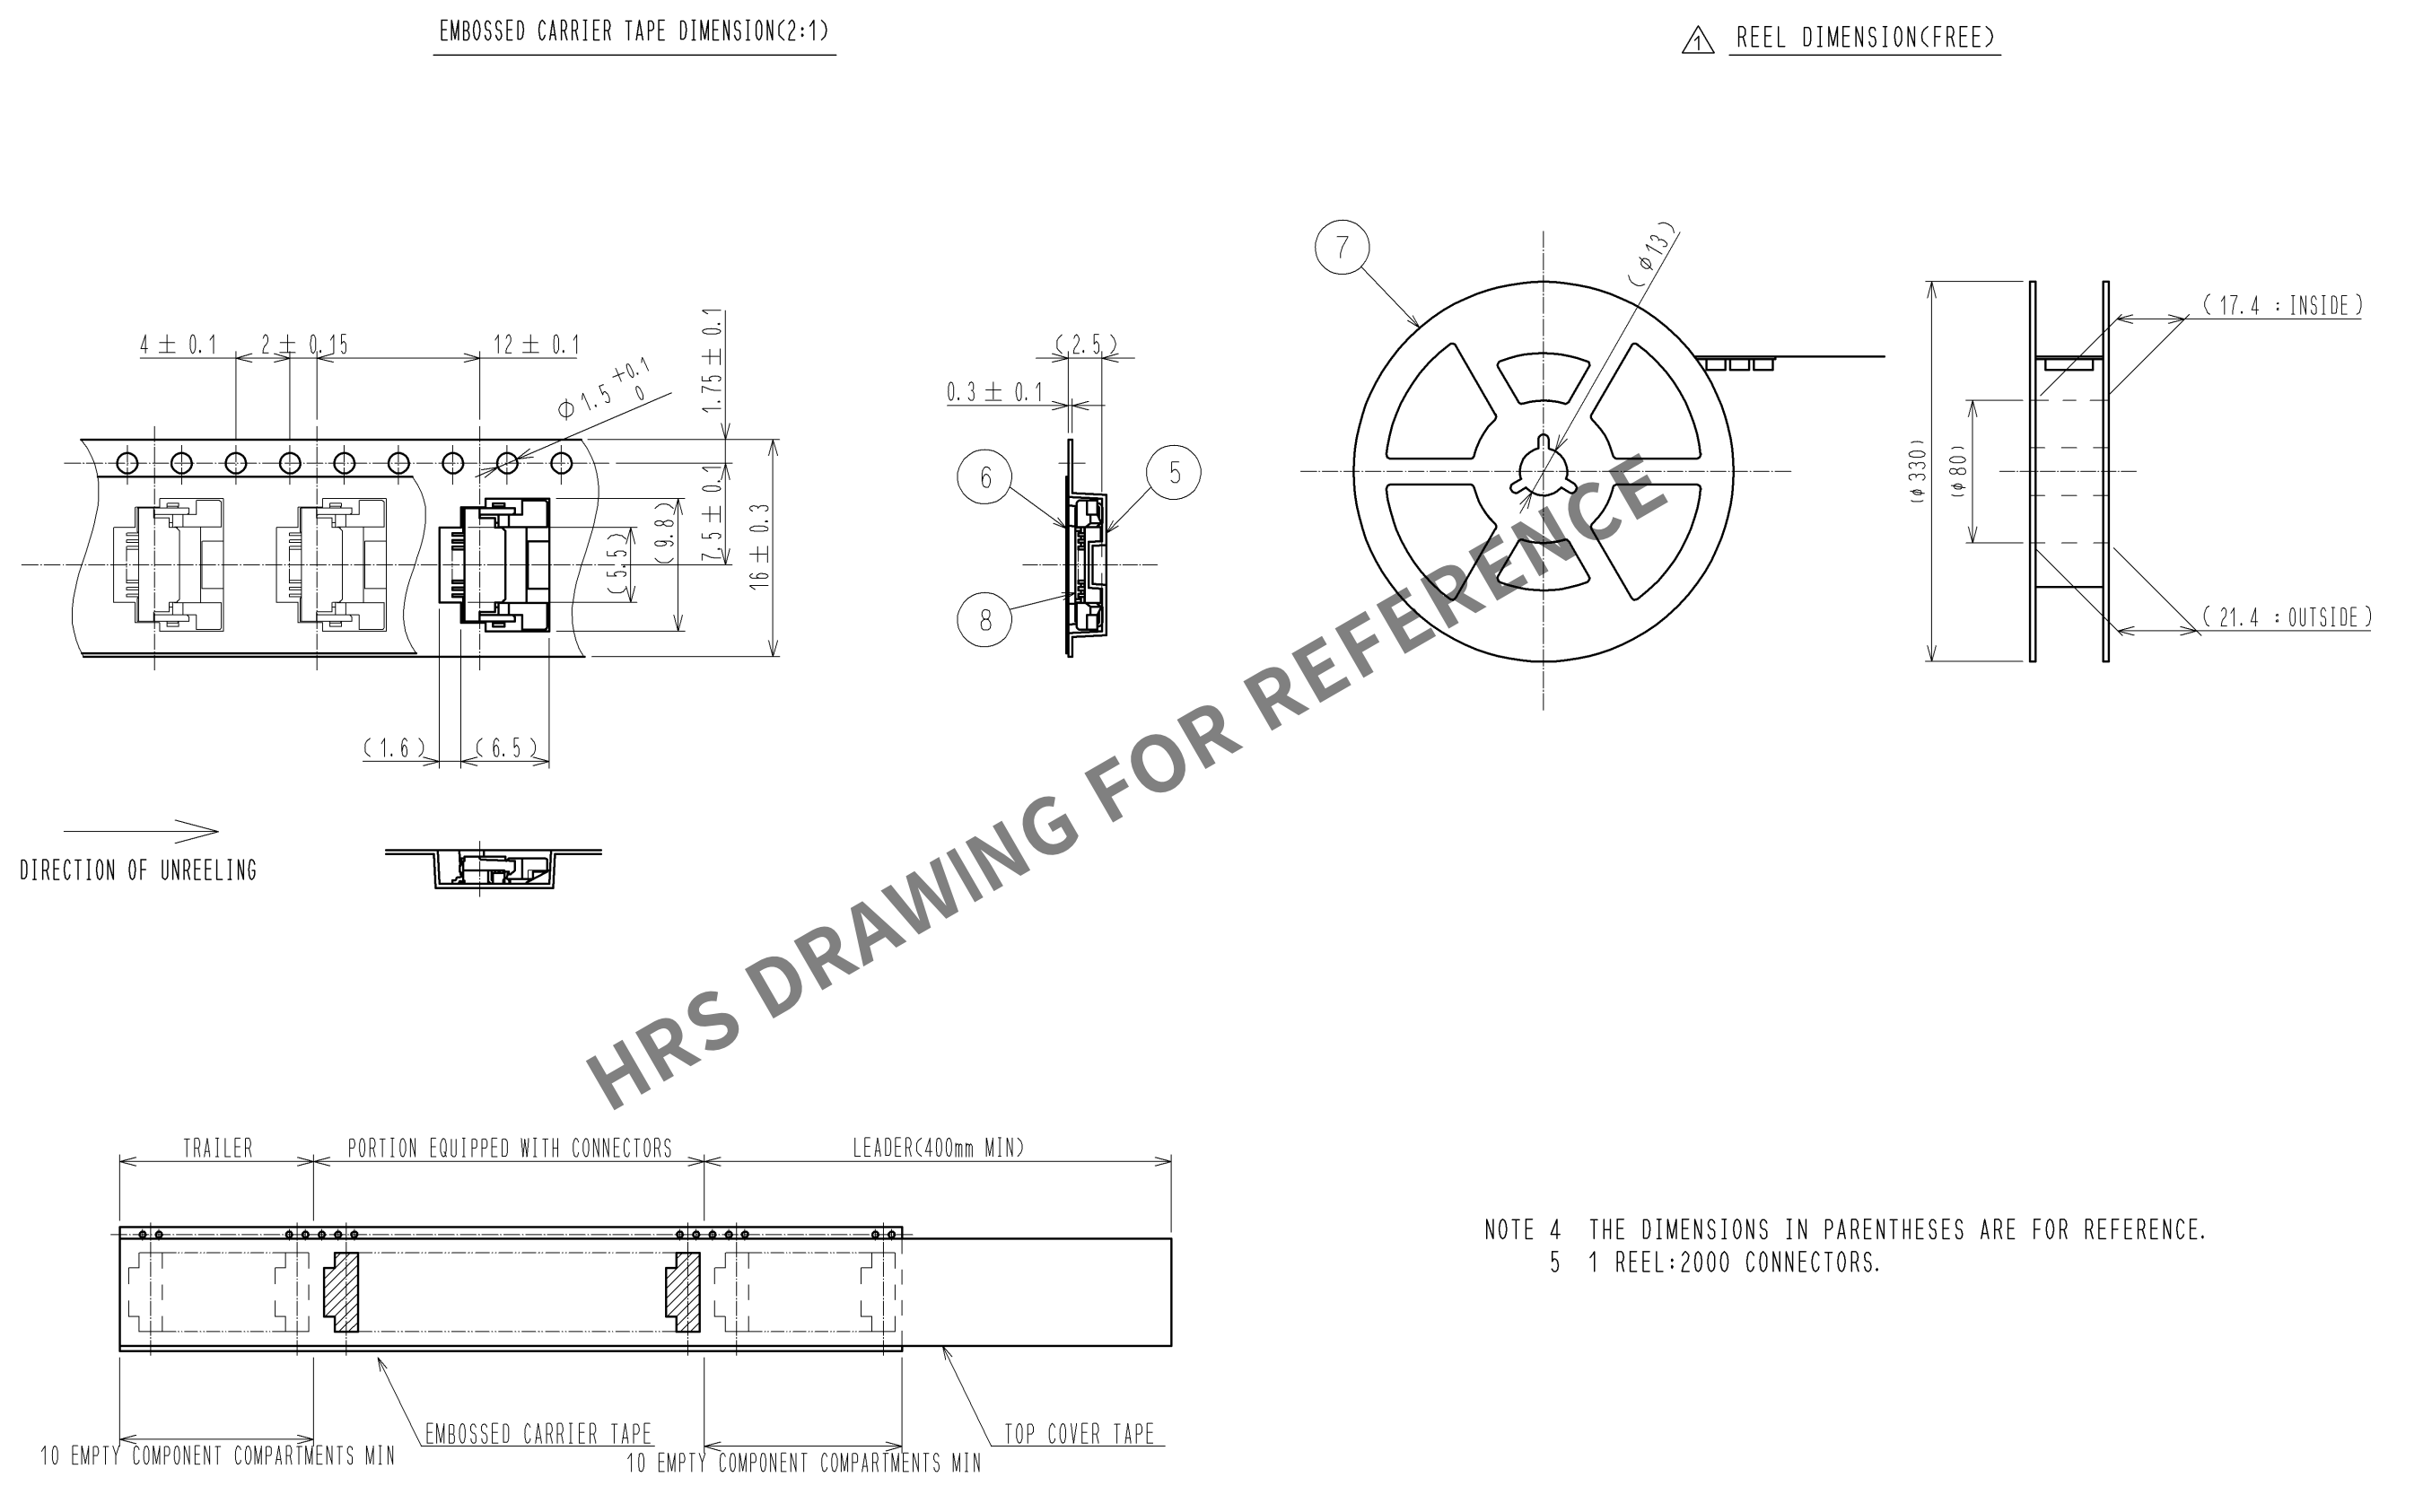

<DRAWING FOR PACKING>

HRS	DRAWING NO.	EDC3-150550-51
	PART NO.	FH12A-10S-0.5SH(55)
	CODE NO.	CL586-0550-9-55
		2