


This document is the property of Amphenol Corporation and is delivered on the express condition that is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.




The marking on this product doesn't contain environmental hazardous materials per Material Specification SS-00259 for Sony GP compliant or per directive 2011/65/EU for RoHS compliant.

FOR REFERENCE ONLY

REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	APPROVED
AX1	EDSR#9102	NON-RELEASE FOR RoHS	04/02/2019	Roger Tsai
AX2	EDSR#9112	ADDED PKG FOR 4/6/8 POS.	04/15/2019	Roger Tsai



2~4POS

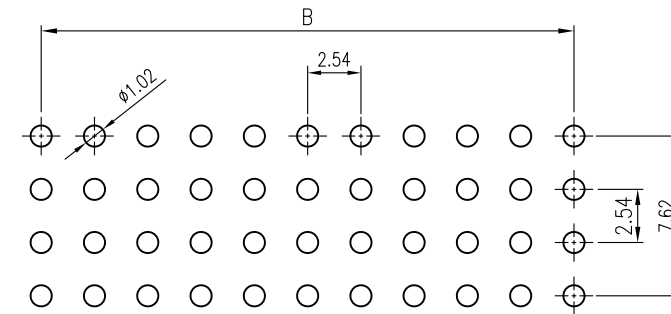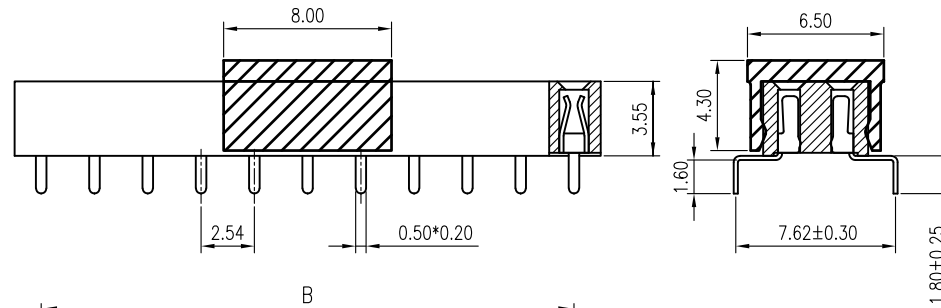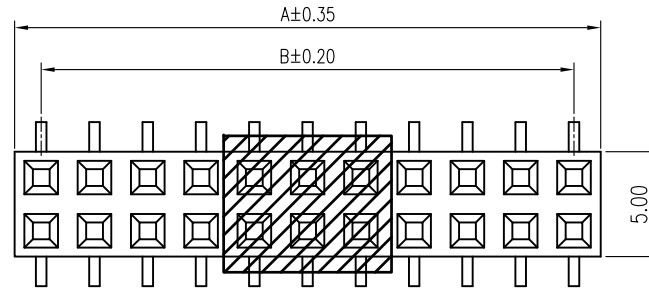

RECOMMENDED PCB LAYOUT
(ALL TOLERANCE ±0.05mm)

NOTES:

1. INSULATOR: NYLON6T, UL 94V-0, COLOR- BLACK
2. CONTACT: COPPER ALLOY, SELECTIVE PLATED THICKNESS MIN. ON CONTACT AREA, GOLD FLASH OR MATTE TIN PLATED 100u" THICKNESS ON SOLDERING AREA; UNDER NICKEL PLATED 50u" THICKNESS MIN. OVERALL.
3. THIS PRODUCT DOESN'T CONTAIN ENVIRONMENTAL HAZARDOUS MATERIALS PER DIRECTIVE 2011/65/EU FOR RoHS.

P/N: G808C XX 26 X TDEU

NO. OF POS. ↓

CONTACT AREA/SOLDER AREA
0: GOLD FLASH/GOLD FLASH
2: 15u" GOLD/GOLD FLASH
3: 30u" GOLD/GOLD FLASH
4: 10u" GOLD/GOLD FLASH
5: 100u" MATTE TIN/100u" MATTE TIN

40	50.80	48.26
38	48.26	45.72
36	45.72	43.18
34	43.18	40.64
32	40.64	38.10
30	38.10	35.56
28	35.56	33.02
26	33.02	30.48
24	30.48	27.94
22	27.94	25.40
20	25.40	22.86
18	22.86	20.32
16	20.32	17.78
14	17.78	15.24
12	15.24	12.70
10	12.70	10.16
8	10.16	7.62
6	7.62	5.08
4	5.08	2.54
NO. OF POSITIONS	A	B


TOLERANCE		APPROVALS		DATE	TITLE G808C SERIES, PCB SOKET 2.54 PITCH, DUAL ROWS BOTH-END ENTRY, W/CAP			Amphenol® Amphenol Corporation Amphenol Taiwan Corporation		
X.		DRAWN	Aqua Chou	04/15/2019						
X.X	±0.30	CHECKED	Karen Su	04/15/2019		UNIT mm	SIZE A3	PART No. G808CXX26XTDEU		
X.XX	±0.20									
X.XXX	±0.10									
ANGULAR	±1°	APPROVED	Roger Tsai	04/15/2019						
UNLESS OTHERWISE SPECIFIED		DWG TYPE CUST DWG	PROJECT CODE SKT	SCALE NA						

This document is the property of Amphenol Corporation and is delivered on the express condition that is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

The marking on this product doesn't contain environmental hazardous materials per Material Specification SS-00259 for Sony GP compliant or per directive 2011/65/EU for RoHS compliant.

FOR REFERENCE ONLY

REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	APPROVED
AX1	EDSR#9102	NON-RELEASE FOR RoHS	04/02/2019	Roger Tsai
AX2	EDSR#9112	ADDED PKG FOR 4/6/8 POS.	04/15/2019	Roger Tsai

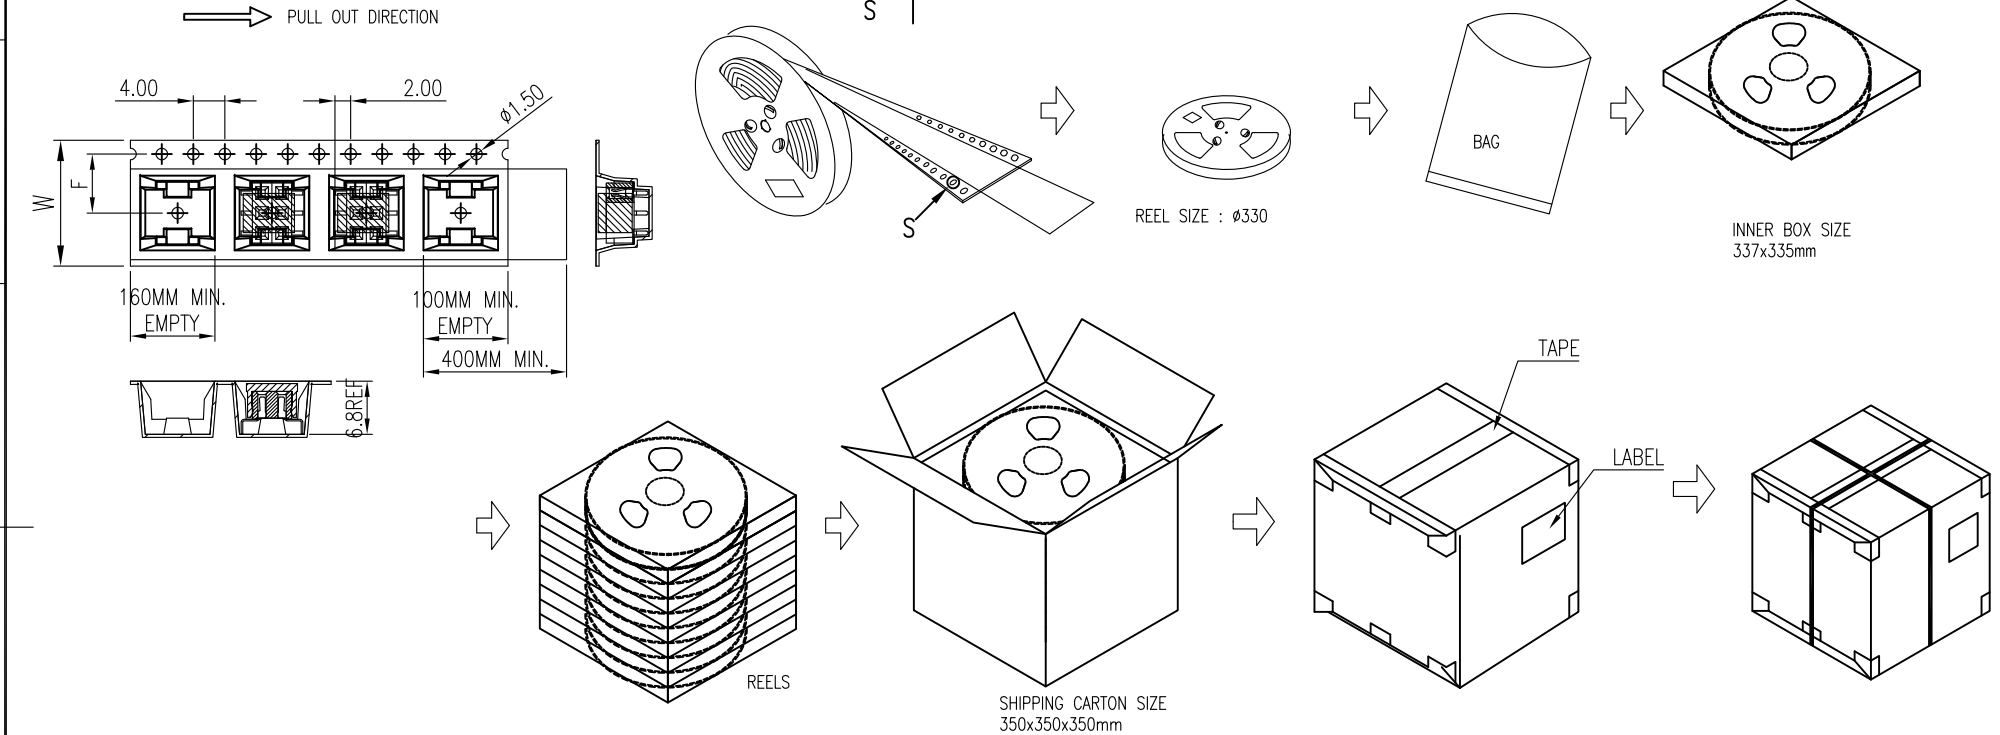

2X4=08	7,200	800	9	24.0	11.5	--
2X2=04/2X3=06	8,800	800	11	16.0	7.5	--
POSITION	PARTS PER CARTON (S.P.Q)	PARTS PER PEEL	TOTAL PEELS PER CARTON	DIM "W"	DIM "F"	DIM "S"

TOLERANCE		APPROVALS		DATE	TITLE G808C SERIES, PCB SOKET 2.54 PITCH, DUAL ROWS BOTH-END ENTRY, W/CAP	Amphenol® Amphenol Corporation Amphenol Taiwan Corporation			
X. X.X ±0.30 X.XX ±0.20 X.XXX ±0.10		DRAWN	Aqua Chou	04/15/2019					
		CHECKED	Karen Su	04/15/2019					
		APPROVED	Roger Tsai	04/15/2019					
ANGULAR ±1°						UNIT mm	SIZE A3	PART No. G808CXX26XTDEU	
UNLESS OTHERWISE SPECIFIED		DWG TYPE CUST DWG	PROJECT CODE SKT			SCALE NA	SHEET 2 OF 2	DWG No. G808CXX26XTDEU	REV. AX2