

This document is the property of Amphenol Corporation and is delivered on the express condition that is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

The marking on this product doesn't contain environmental hazardous materials per Material Specification SS-00259 for Sony GP compliant or per directive 2002/95/EC for RoHS compliant.



ORIGINAL



REVISIONS			
SYM	ECN No.	DESCRIPTION	DATE
A		RELEASE TO PRODUCTION	07/24/2007
B	NE-11109	ADD CAP	07/28/2011



NOTES:

1. INSULATOR: HIGH TEMPERATURE THERMOPLASTIC, UL 94V-0, COLOR- BLACK
2. CONTACT: COPPER ALLOY, SELECTIVE GOLD PLATED
3. THIS PRODUCT DOESN'T CONTAIN ENVIRONMENTAL HAZARDOUS MATERIALS PER DIRECTIVE 2002/95/EC FOR RoHS.
4. PACKING IS PER AMTA PACKING SPECIFICATION PKS-0001
5. $\triangle$ ARE CRITICAL DIMENSIONS

PART NO. G802MA XXX X 11YEU



NO. OF POSITIONS

CONTACT FINISH
0: FULL GOLD FLASH
1: GOLD FLASH
2: 15 u" GOLD
3: 30 u" GOLD

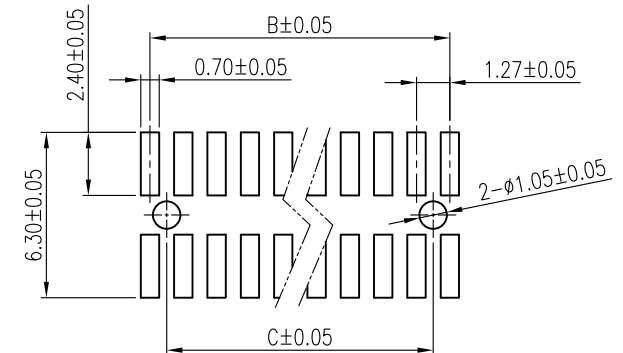

RECOMMENDED PCB LAYOUT
ALL TOLERANCE ± 0.05

2 x 27	34.29	33.02	31.75	2 x 50	63.50	62.23	60.96
2 x 26	33.02	31.75	30.48	2 x 49	62.23	60.96	59.69
2 x 25	31.75	30.48	29.21	2 x 48	60.96	59.69	58.42
2 x 24	30.48	29.21	27.94	2 x 47	59.69	58.42	57.15
2 x 23	29.21	27.94	26.67	2 x 46	58.42	57.15	55.88
2 x 22	27.94	26.67	25.40	2 x 45	57.15	55.88	54.61
2 x 21	26.67	25.40	24.13	2 x 44	55.88	54.61	53.34
2 x 20	25.40	24.13	22.86	2 x 43	54.61	53.34	52.07
2 x 19	24.13	22.86	21.59	2 x 42	53.34	52.07	50.80
2 x 18	22.86	21.59	20.32	2 x 41	52.07	50.80	49.53
2 x 17	21.59	20.32	19.05	2 x 40	50.80	49.53	48.26
2 x 16	20.32	19.05	17.78	2 x 39	49.53	48.26	46.99
2 x 15	19.05	17.78	16.51	2 x 38	48.26	46.99	45.72
2 x 14	17.78	16.51	15.24	2 x 37	46.99	45.72	44.45
2 x 13	16.51	15.24	13.97	2 x 36	45.72	44.45	43.18
2 x 12	15.24	13.97	12.70	2 x 35	44.45	43.18	41.91
2 x 11	13.97	12.70	11.43	2 x 34	43.18	41.91	40.64
2 x 10	12.70	11.43	10.16	2 x 33	41.91	40.64	39.37
2 x 9	11.43	10.16	8.89	2 x 32	40.64	39.37	38.10
2 x 8	10.16	8.89	7.62	2 x 31	39.37	38.10	36.83
2 x 7	8.89	7.62	6.35	2 x 30	38.10	36.83	35.56
2 x 6	7.62	6.35	5.08	2 x 29	36.83	35.56	34.29
2 x 5	6.35	5.08	3.81	2 x 28	35.56	34.29	33.02
NO OF POS.	A	B	C	NO OF POS.	A	B	C

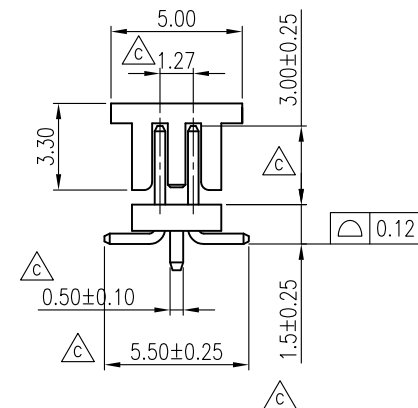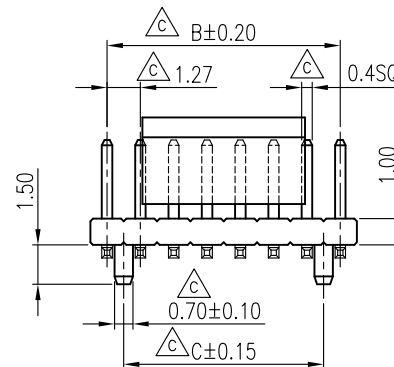

TOLERANCE		APPROVALS		DATE	TITLE		PART No.	
X. ± 0.30		DRAWN Aqua Chou		07/28/2011	G802MA SERIES PCB HEADER, 1.27mm PITCH 1.27mm ROW SPACING SMT TYPE, W/ LOCATION POSTS		Amphenol® Amphenol Corporation Amphenol Taiwan Corporation	
X.XX ± 0.20		CHECKED Roger Tsai		07/28/2011				
X.XXX ± 0.10		APPROVED Roger Tsai		07/28/2011				
ANGULAR $\pm 1^\circ$		DWG TYPE CUST DWG		PROJECT CODE HEAD				
UNLESS OTHERWISE SPECIFIED					UNIT mm		SIZE A3	
					SCALE NA		SHEET 1 OF 1	
							DWG No. G802MAXXXX11YEU	
							REV. B	