

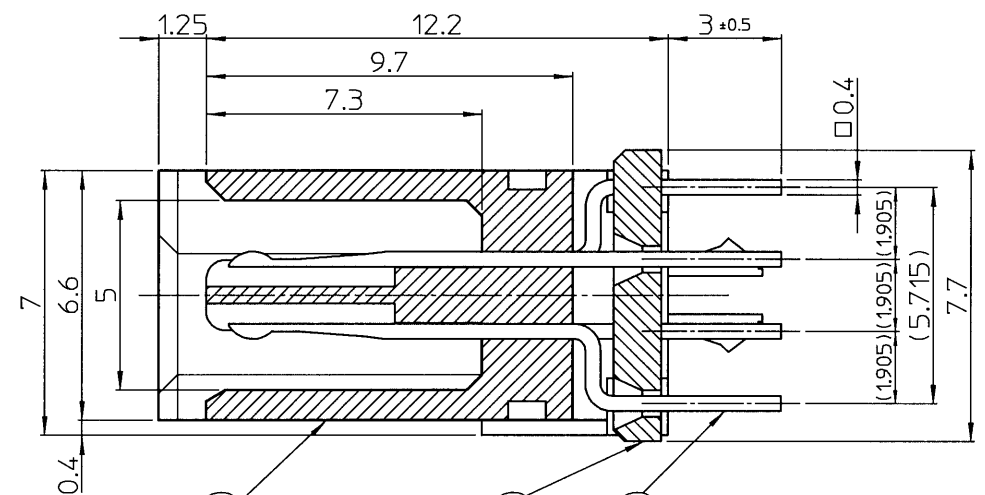
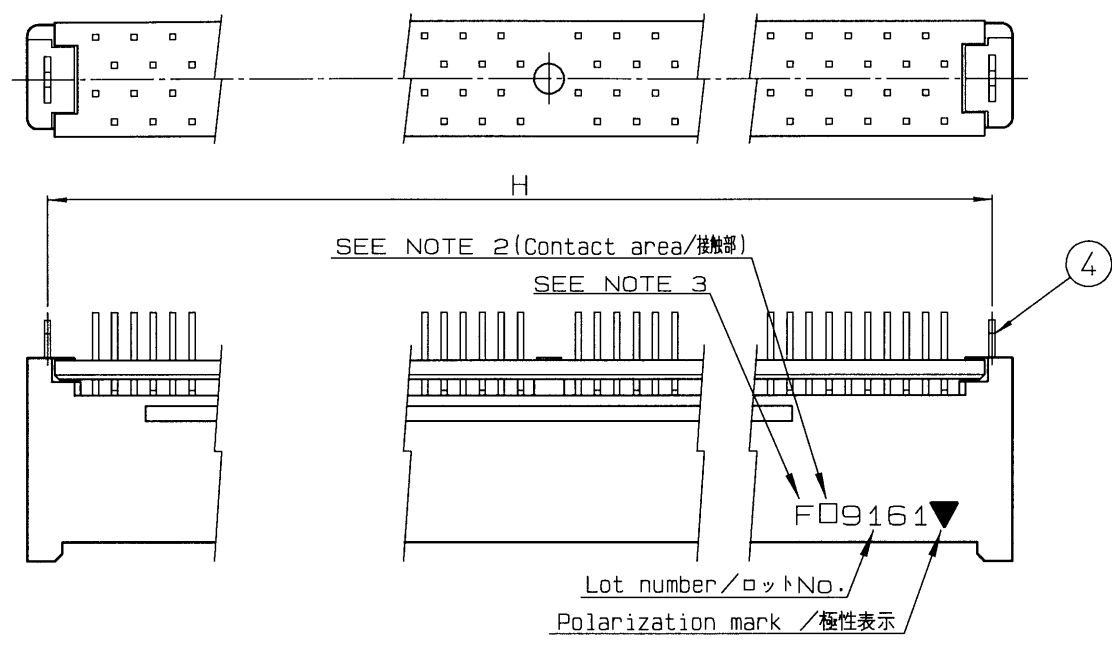



H	G	F	E	D	C	B	A	Number of Contacts 極数
83.82	49.53	24.13	77.47	79.17	81.87	84.5	86.5	120
96.52	62.23	24.13	90.17	91.87	94.57	97.2	99.2	140
109.22	62.23	36.83	102.87	104.57	107.27	109.9	111.9	160
121.92	62.23	49.53	115.57	117.27	119.97	122.6	124.6	180
134.62	62.23	62.23	128.27	129.97	132.67	135.3	137.3	200

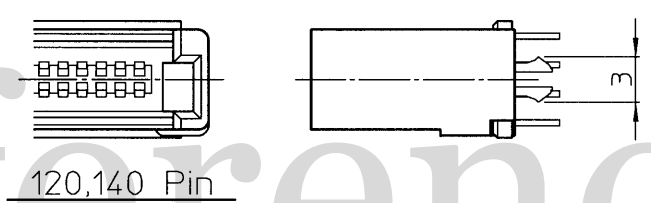

- NOTES
- Unless otherwise specified, tolerance shall be /指定なき寸法公差
Less than 10. / 0~10未満 ±0.2
10 or more ~ Less than 50. / 10~50未満 ±0.25
50 or more. / 50以上 ±0.3
 - Contact finish. /コンタクトの仕上
Under plating Nickel /ニッケルメッキ下地
Contact area : Gold /接触部:金メッキ仕上
None:0.05μm or more /0.05μm以上
D:0.25μm or more /0.25μm以上
H:0.76μm or more /0.76μm以上
Terminal area: Tin-copper plating /テール部:錫銅メッキ仕上
 - F: RoHS compliant /RoHS対応品
 - A reference drawing of P.W.B. /基板設計要領
Board thickness /適合基板厚 t=1.6^{+0.2}_{-0.1}

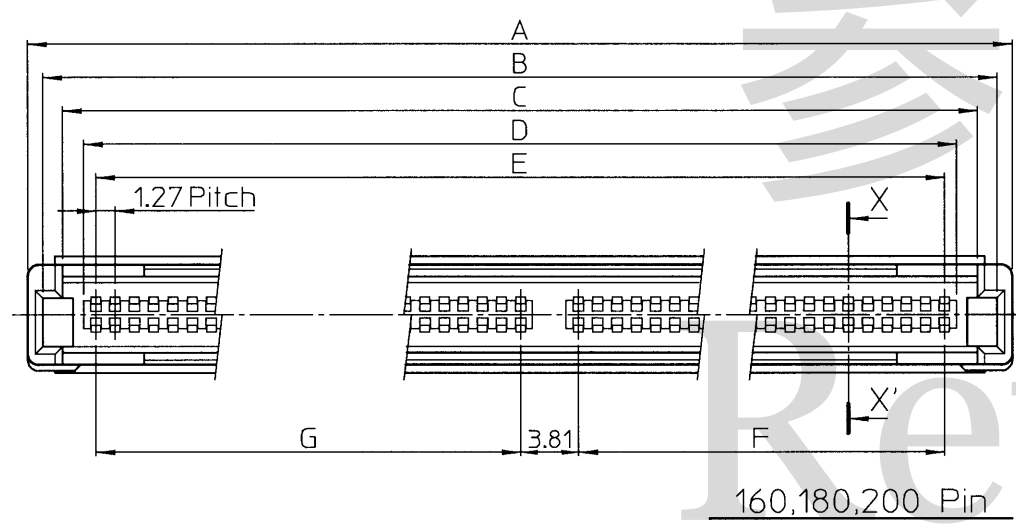

(Connector mounting side / コネクタ搭載面)

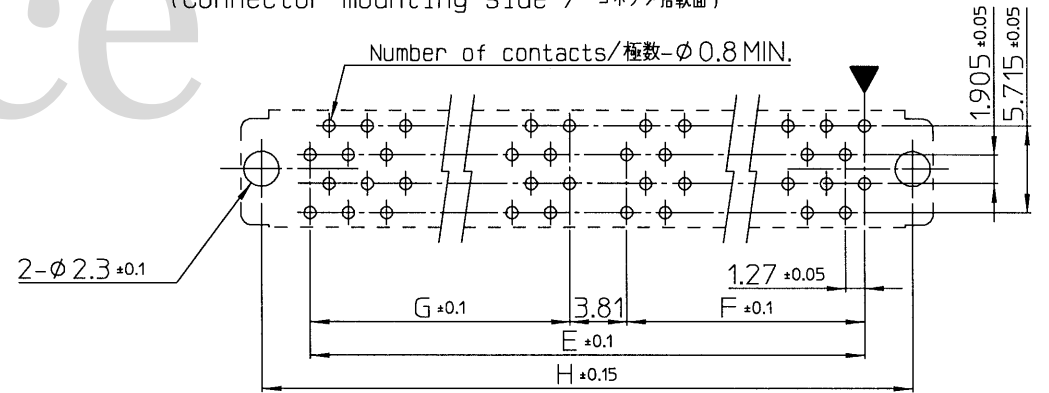

4	Mounting hardware 取付金具	2	Copper alloy 銅合金	Tin-copper plating 錫銅メッキ
3	Terminal setting plate 補正板	1	Nylon 66 Glass-filled, UL94V-0 66ナイロン ガラス繊維入り UL94V-0	Black 黒
2	Contact コンタクト	Number of contacts 極数	Copper alloy 銅合金	SEE NOTE2
1	Insulator インシュレータ	1	Nylon 66 Glass-filled, UL94V-0 66ナイロン ガラス繊維入り UL94V-0	Black 黒
No.	Component 部品名	Quantity 数量	Material 材質	finish 仕上

△ ×									
△ ×									
△ ×									
Apr.20,2021	N. Saito	Y. Abe	K. Chiba	Revised for style change. / 様式変更の為、改版。					
REV. DATE	APPROVED BY	CHECKED BY	DRAWN BY	DESCRIPTION					
THIRD ANGLE PROJECTION	DRAWN BY Y. Abe	DATE Oct. 22, 2018	CHECKED BY N. Saito	DATE Oct. 26, 2018	APPROVED BY M. Suzuki	DATE Oct. 26, 2018	SCALE 2:1	UNIT mm	
MATERIAL	TITLE				KEL CORPORATION				
FINISH	8817-□□□-170S□-F				DRAWING No. P3D796				REVISION 2