
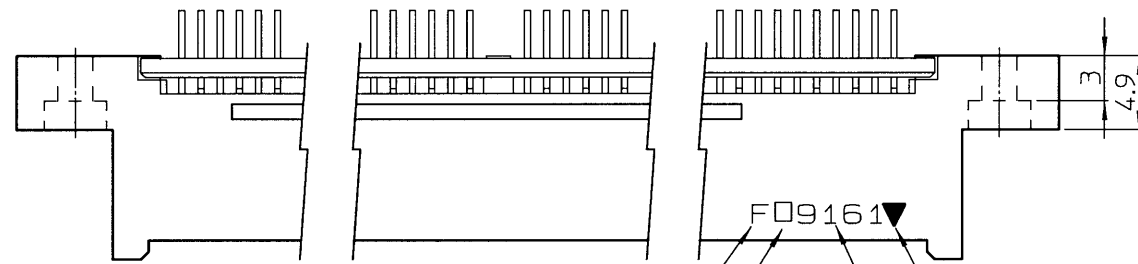


I	H	G	F	E	D	C	B	A	Number of Contacts 枚数
86.5	91.44	49.53	24.13	77.47	79.17	81.87	84.5	99.2	120
99.2	104.14	62.23	24.13	90.17	91.87	94.57	97.2	111.9	140
111.9	116.84	62.23	36.83	102.87	104.57	107.27	109.9	124.6	160
124.6	129.54	62.23	49.53	115.57	117.27	119.97	122.6	137.3	180
137.3	142.24	62.23	62.23	128.27	129.97	132.67	135.3	150.0	200

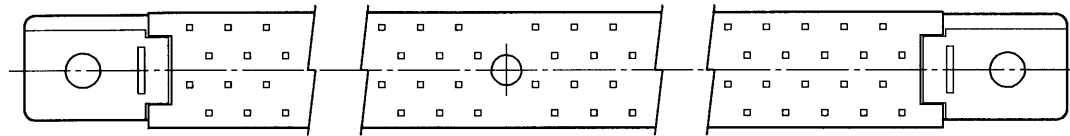


SEE NOTE 3.

SEE NOTE 2(Contact area/接触部)

Polarization mark/極性表示

Lot number/ロットNo.

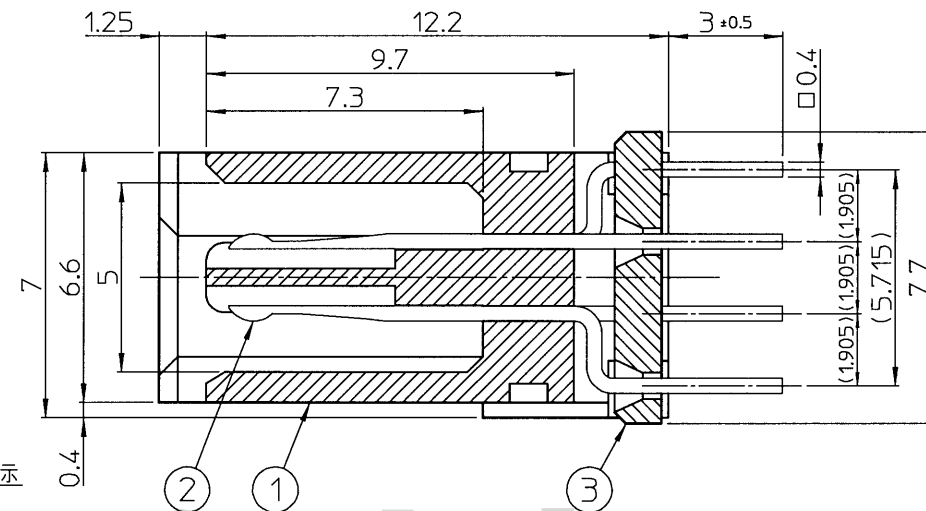

X-X' Cross-section(Scale 5:1)

NOTES




1. Unless otherwise specified, tolerance shall be /指定なき寸法公差

Less than 10.	/ 0~10未満	±0.2
10 or more ~ Less than 50.	/ 10~50未満	±0.25
50 or more.	/ 50以上	±0.3

2. Contact finish. /コンタクトの仕上
Under plating Nickel /ニッケルメッキ下地
Contact area : Gold /接触部:金メッキ仕上
None:0.05μm or more /0.05μm以上
D:0.25μm or more /0.25μm以上
H:0.76μm or more /0.76μm以上
Terminal area: Tin-copper plating /テール部:錫銅メッキ仕上

4. A reference drawing of P.W.B. / 基板設計要領
Board thickness / 適合基板厚 $t = 1.6 \pm 0.2$

(Connector mounting side / コネクタ搭載面)

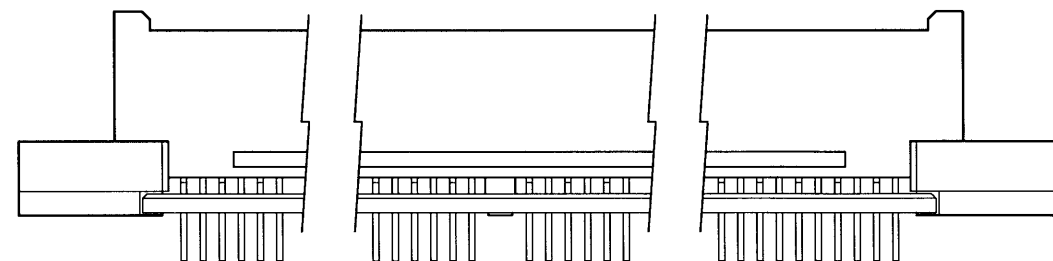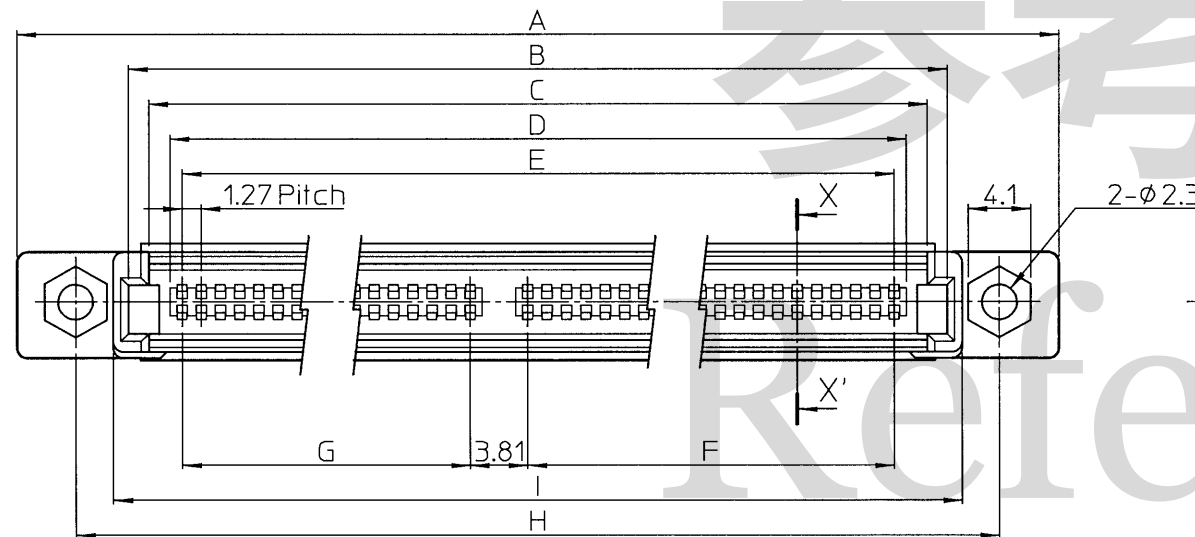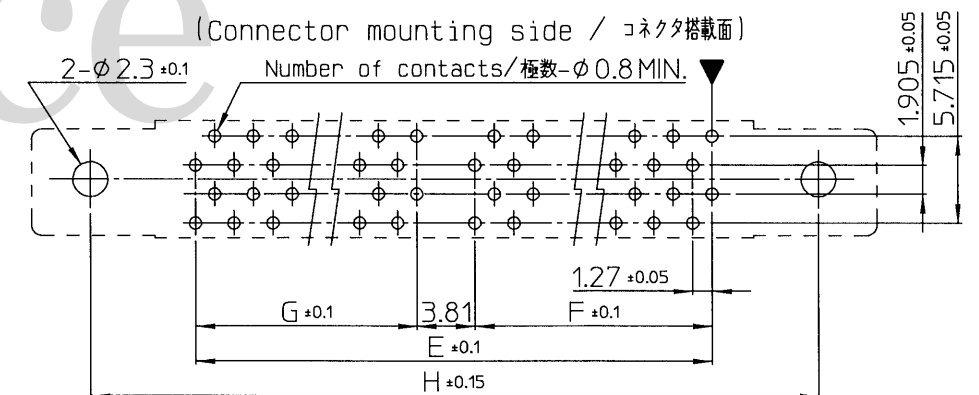

3	Terminal setting plate 補正板	1	Nylon 66 Glass-filled,UL94V-0 66ナイロン ガラス繊維入り UL94V-0	Black 黒
2	Contact コンタクト	Number of contacts 極数	Copper alloy 銅合金	SEE NOTE2
1	Insulator インシュレータ	1	Nylon 66 Glass-filled,UL94V-0 66ナイロン ガラス繊維入り UL94V-0	Black 黒
No.	Component 部 品 名	Quantity 数量	Material 材 質	finish 仕 上

△ ×				
△ ×				
△ ×				
Apr.20,2021	N. Saito	Y. Abe	K. Choshi	Revised for style change. / 様式変更の為、改版。
REV. DATE	APPROVED BY	CHECKED BY	DRAWN BY	DESCRIPTION
THIRD ANGLE PROJECTION	DRAWN BY Y. Abe	DATE Oct. 1, 2018	CHECKED BY N. Saito	DATE Oct. 3, 2018
			APPROVED BY M. Suzuki	DATE Oct. 4, 2018
			SCALE 2:1	UNIT mm
MATERIAL	TITLE			KEL CORPORATION
FINISH	8816-□□□-170S□-F			DRAWING No. P3D788
				REVISION 2