
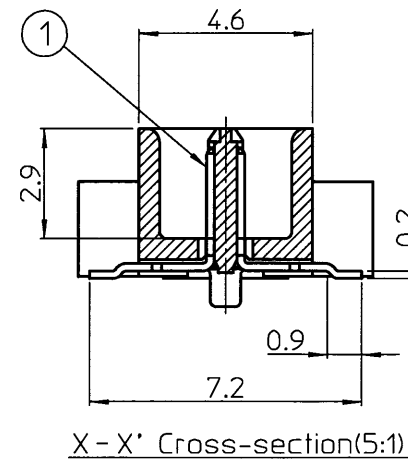
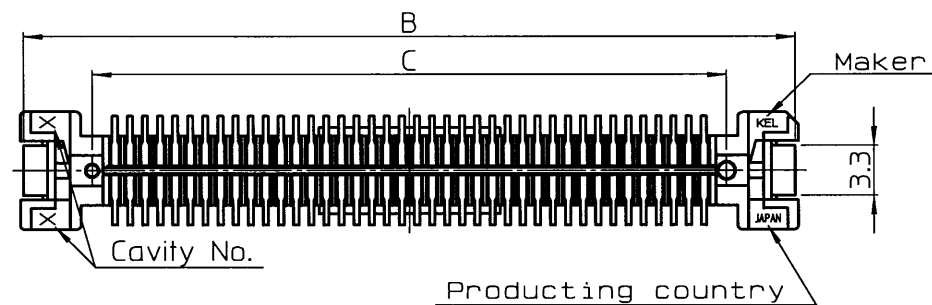
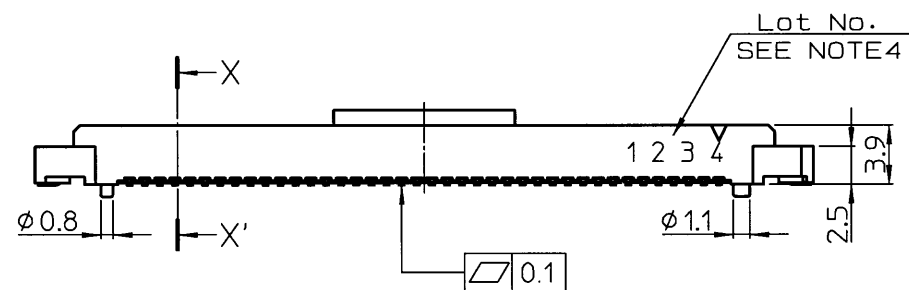
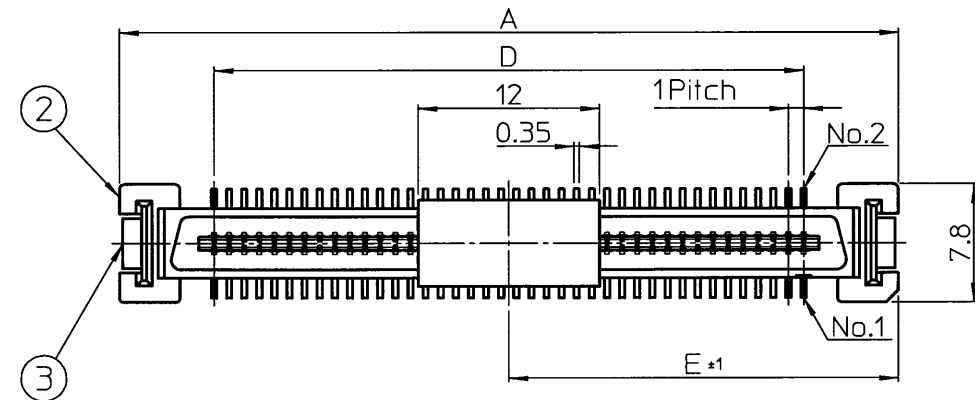


E	D	C	B	A	No. of contacts
13.25	14	17	26.1	26.5	30
18.25	24	27	36.1	36.5	50
25.75	39	42	51.1	51.5	80
30.75	49	52	61.1	61.5	100
35.75	59	62	71.1	71.5	120

Notes

- 1) Unless otherwise specified, tolerance shall be:
Less than 10 ± 0.2
10 ~ 50 ± 0.25
50 or more ± 0.3
- 2) Contact finish.
Under plating Nickel (2~4 μm)
Contact area Au 0.05 μm or more
Tails Au 0.03 μm or more
- 3) Retention Clip Finish.
Under plating Nickel (2~4 μm)
Gold plating 0.03 μm or more
- 4) Marking Specification
Laser marking
- 5) The product represented here is 80 contacts version
- 6) A reference drawing of P.W.B.

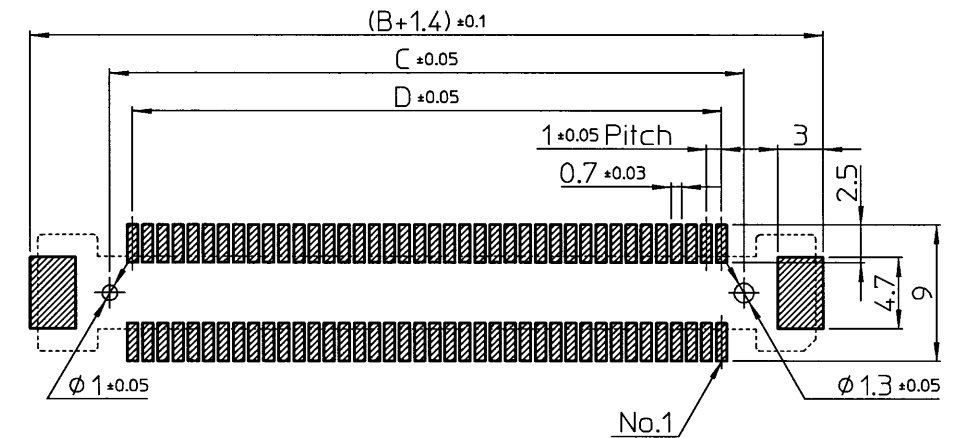

④	Pick up cover	1	Glass-filled Modified PA6T,UL94V-0,Black	—
③	Retention clip	2	Copper alloy	SEE NOTE 3
②	Insulator	1	Glass-filled LCP,UL94V-0,Off-white	—
①	Contact	No. of contacts	Copper alloy	SEE NOTE 2
No.	Component	Quantity	Material	Finish

△ x									
△ x									
△ x									
△ x									
REV. DATE	APPROVED BY	DRAWN BY	DESCRIPTION						
THIRD ANGLE PROJECTION	DRAWN BY T. Ohta Jun. 18, 2014	DATE Jun. 18, 2014	CHECKED BY K. Tozaki Jun. 18, 2014	DATE Jun. 18, 2014	APPROVED BY H. Sugita Jun. 18, 2014	DATE Jun. 18, 2014	SCALE 2:1	UNIT mm	
MATERIAL	TITLE 87BMN-□□□S-1F				KEL CORPORATION				
FINISH					DRAWING No. P3C957		REVISION 1		