


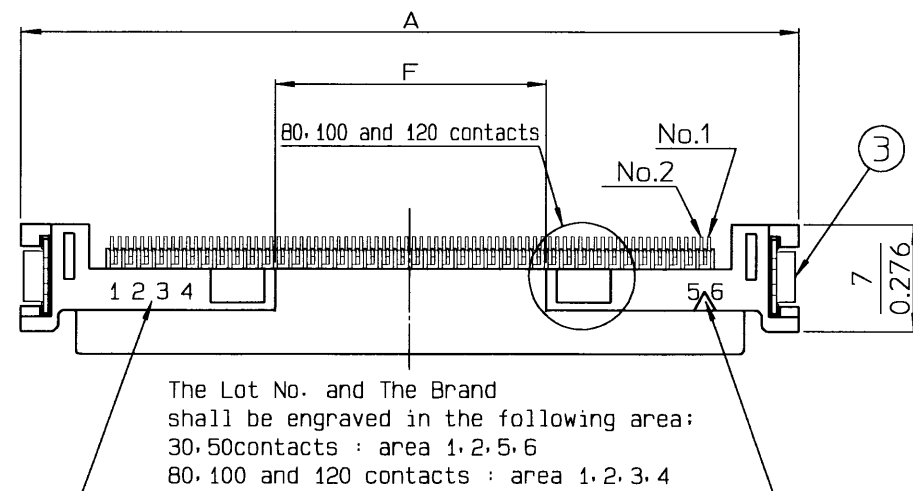
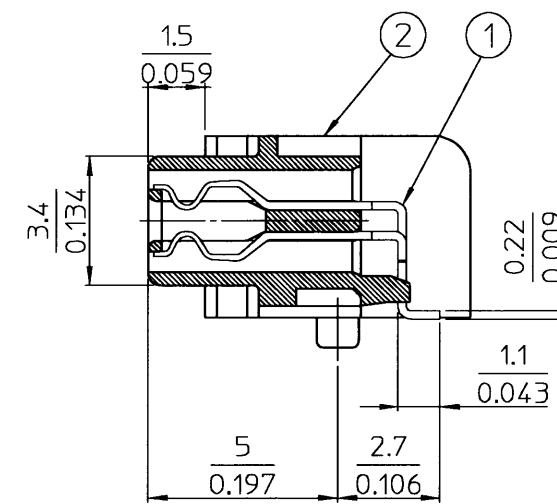
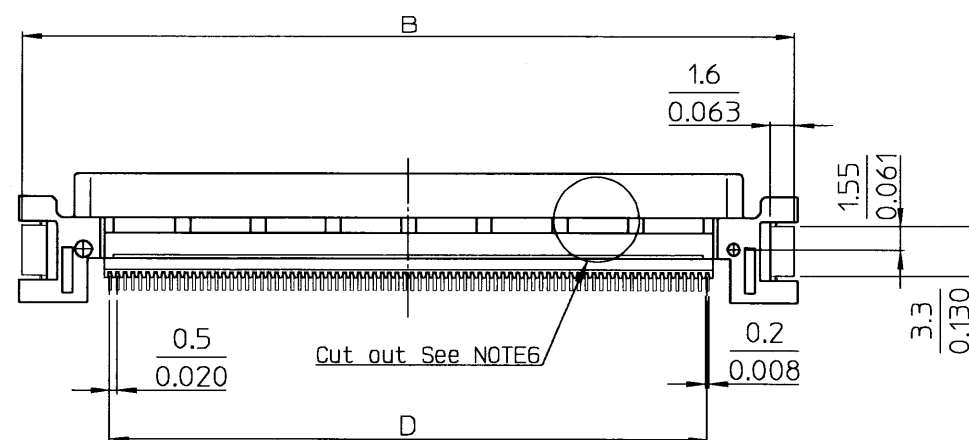


P39740


No.

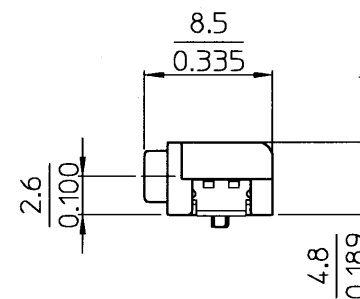

30,50 contacts

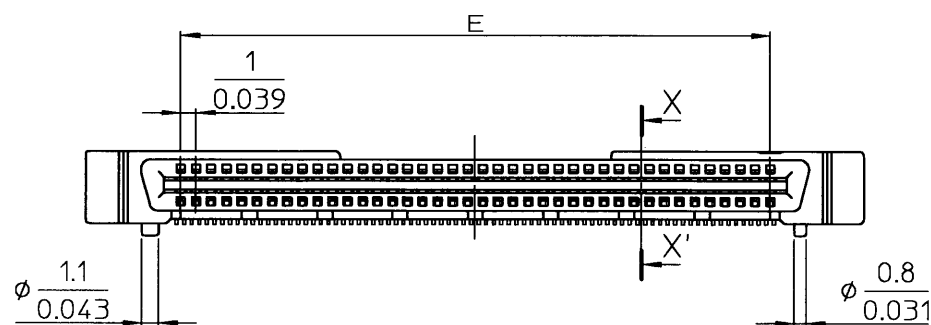


X-X' Cross-section (Scale 5:1)

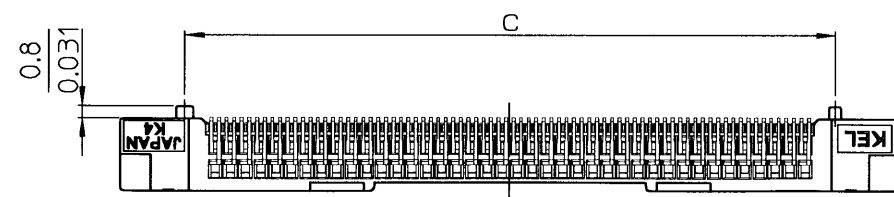

F	E	D	C	B	A	NO. of contacts
10.0 (0.394)	14.0 (0.551)	14.5 (0.574)	18.0 (0.709)	26.1 (1.028)	26.5 (1.043)	30
15.0 (0.591)	24.0 (0.945)	24.5 (0.965)	28.0 (1.102)	36.1 (1.421)	36.5 (1.437)	50
18.0 (0.709)	39.0 (1.535)	39.5 (1.555)	43.0 (1.693)	51.1 (2.012)	51.5 (2.028)	80
18.0 (0.709)	49.0 (1.929)	49.5 (1.949)	53.0 (2.087)	61.1 (2.406)	61.5 (2.421)	100
20.0 (0.787)	59.0 (2.323)	59.5 (2.343)	63.0 (2.480)	71.1 (2.799)	71.5 (2.815)	120

Notes

- 1) Dimensions are in millimeter.
- 2) Inch equivalents are in parentheses or below the metric dimension.
- 3) Unless otherwise specified, tolerance shall be:
 Less than 10 ± 0.2 (Less than 0.394 ± 0.0079)
 10 ~ 50 ± 0.25 (0.394 ~ 1.969 ± 0.0098)
 50 or more ± 0.3 (1.969 or more ± 0.0118)
- 4) Contacts Finish.
 Under plating Nickel
 Contact area Au 0.05 μ m or more
 Tails Au 0.03 μ m or more
- 5) SMT Retention Clip Finish.
 Under plating Nickel
 Gold plating 0.03 μ m or more
- 6) The product represented here is 80 contacts' version.
- 7) The shape of the relief cut out at the bottom shall vary in accordance with the number of the contacts.
- 8) A reference drawing of P.W.B.

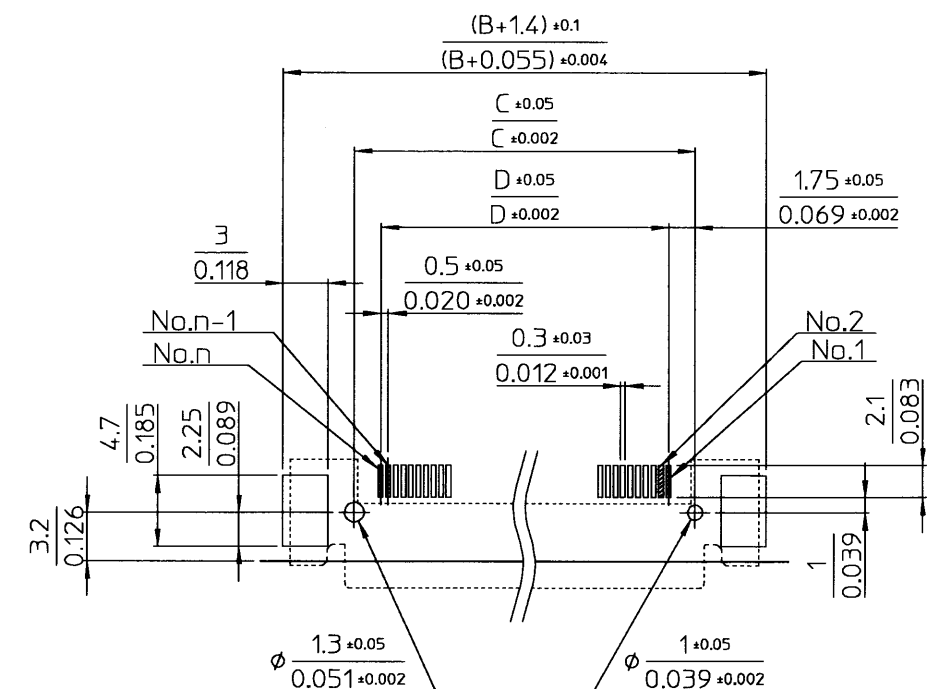

△ x							
△ x							
△ x							
△ x							
REV. DATE	APPROVED BY	DRAWN BY	DATE	DESCRIPTION	SCALE		
THIRD ANGLE PROJECTION	DRAWN BY	DATE CHECKED BY	DATE	APPROVED BY	DATE	SCALE	2:1
MATERIAL	H. Goto Apr. 7. 2005 S. Kitomura Apr. 12. 2005		A. Shinoda Apr. 12. 2005				
FINISH	87BFN-XXXXR-3F		KEL CORPORATION		DRAWING No.	P39740	REVISION 1

3	SMT Retention clip	2	Copper alloy	SEE NOTE4
2	Insulator	1	LCP Glass-filled, UL94V-0, Off-white	
1	Contact	No. of contact	Copper alloy	SEE NOTE4
No.	Component	Quantity	Material	Finish