

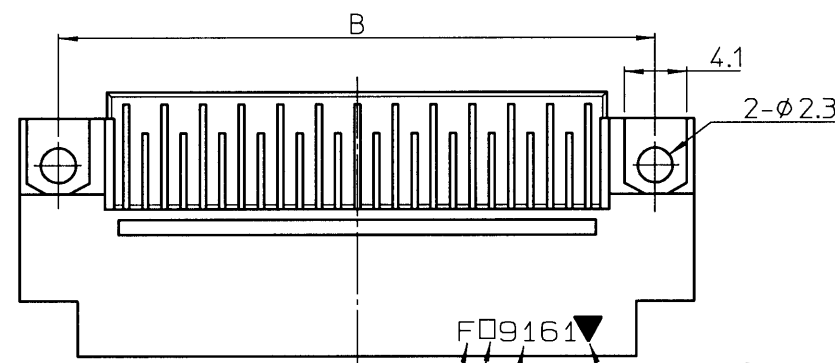
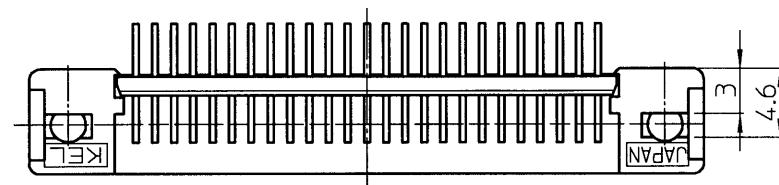
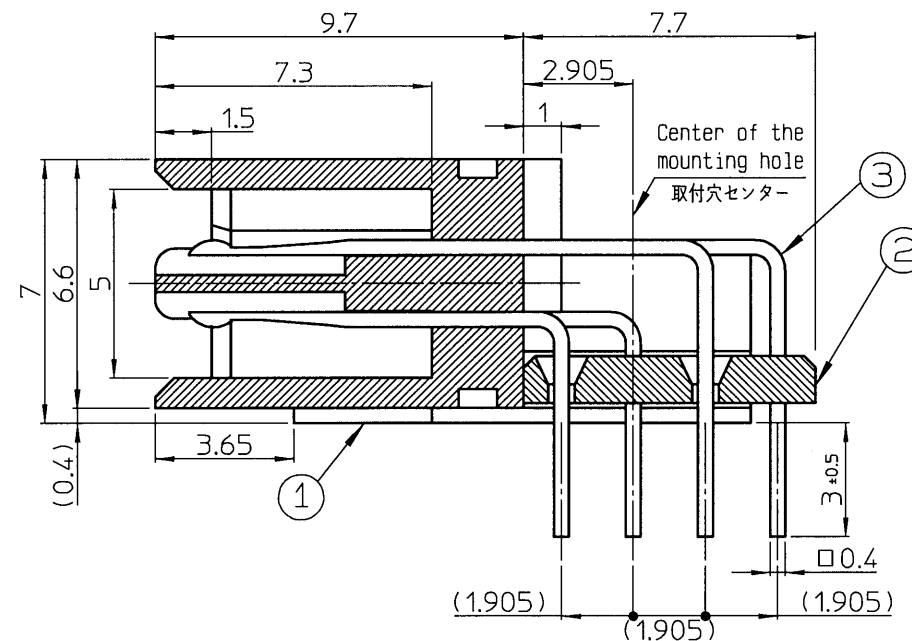


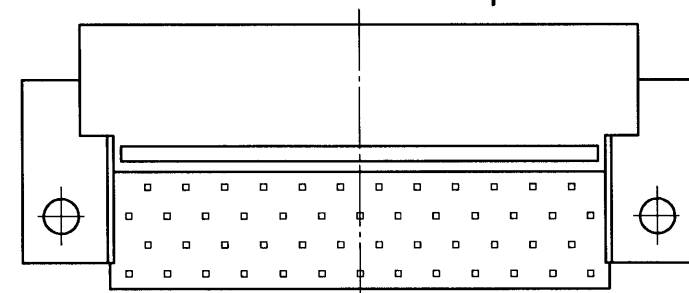

SEE NOTE3
SEE NOTE2(Contact area/接触部)

Lot number/ロットNO.

Polarization mark/極性表示

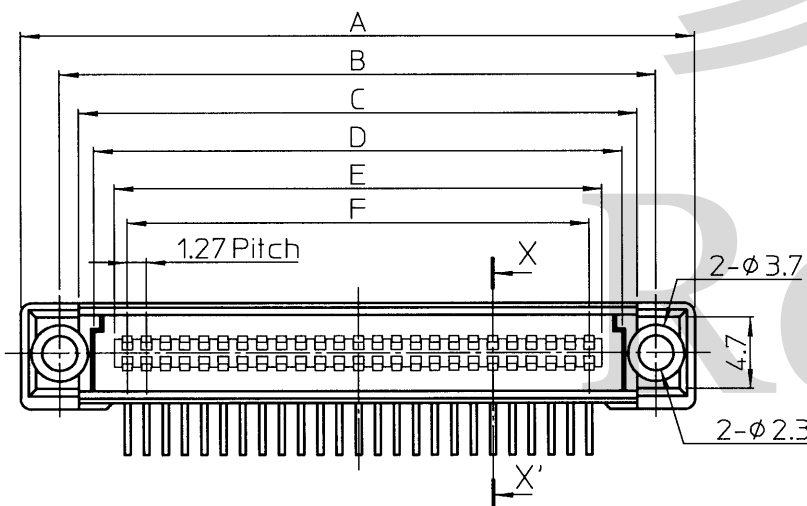

X-X' Cross-section(Scale 5:1)

Notes

1. Unless otherwise specified, tolerance shall be: / 指定なき公差

Less than 10 / 0~10未満 ±0.2

10 ~ 50 / 10~50未満 ±0.25

50 or more / 50以上 ±0.3

2. Contact finish./ コンタクトの仕上げ

Under plating Nickel / ニッケルメッキ下地

Contact area : Gold / 接触部 : 金メッキ仕上げ

NONE : Au 0.05μm or more

D : Au 0.25μm or more

H : Au 0.76μm or more

Terminal area : Tin-copper plating/ テール部: 錫銅メッキ仕上げ


3. F:RoHS Compliant / RoHS対応品

4. This drawing is based on 50 pin contacts. / 本図は、50極で記載したものである。


5. A reference drawing of P.W.B./ 参考基板設計要領

Board thickness / 適合基板厚 t=1.6±0.2

(Connector mounting side / コネクタ搭載面)

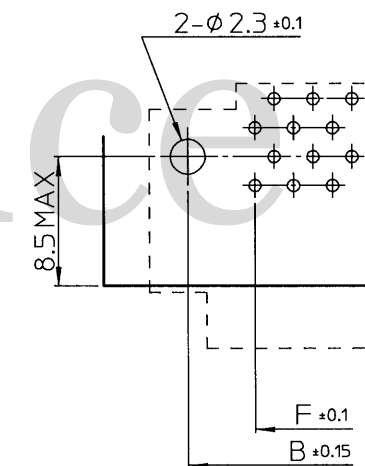

20・32・40・52・60・68 Pin

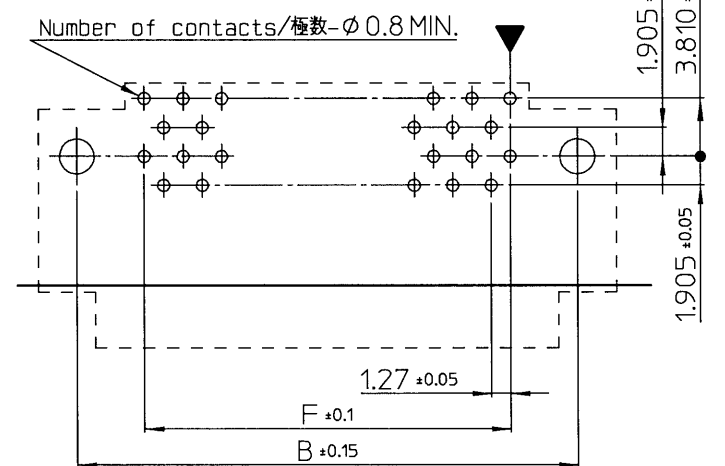

26・30・34・50 Pin

3	Contact コンタクト	No. of contacts 極数	Copper alloy 銅合金	SEE NOTE2
2	Terminal setting plate 補正板	1	Nylon 66 Glass-filled, UL94V-0 66ナイロン・ガラス繊維入り UL94V-0	Black 黒色
1	Insulator インシュレータ	1	Nylon 66 Glass-filled, UL94V-0 66ナイロン・ガラス繊維入り UL94V-0	Black 黒色
No.	Component 部品名	Quantity 数量	Material 材質	Finish 仕上

△ ×					
△ ×					
△ ×					
Apr. 26, 2021	N. Saito	T. Mogami	Y. Abe	Revised for style change. / 様式変更の為、改版。	
REV. DATE	APPROVED BY	CHECKED BY	DRAWN BY	DESCRIPTION	
THIRD ANGLE PROJECTION	DRAWN BY Y. Abe	DATE Oct.30,2018	CHECKED BY N.Saito	DATE Oct.30,2018	APPROVED BY M.Suzuki
MATERIAL			TITLE		
FINISH			8830-□□□-170L□-F		
KEL CORPORATION					DRAWING No.
					P3D804
					REVISION
					2