

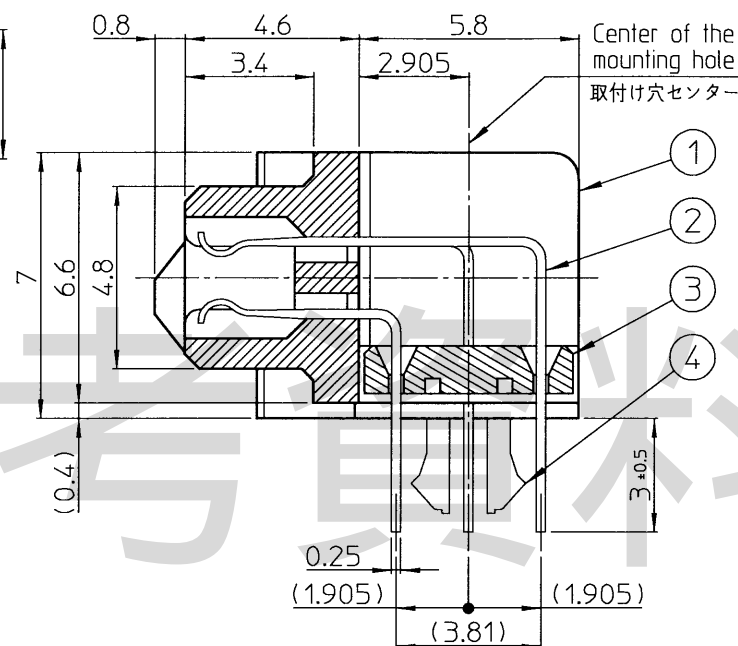
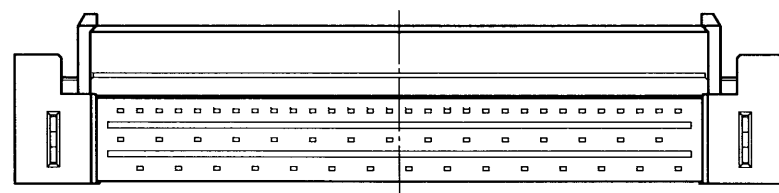
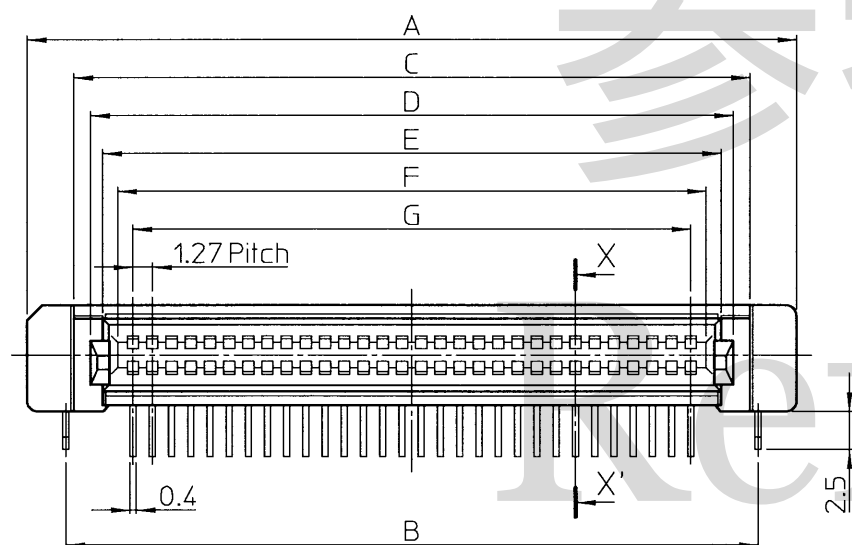
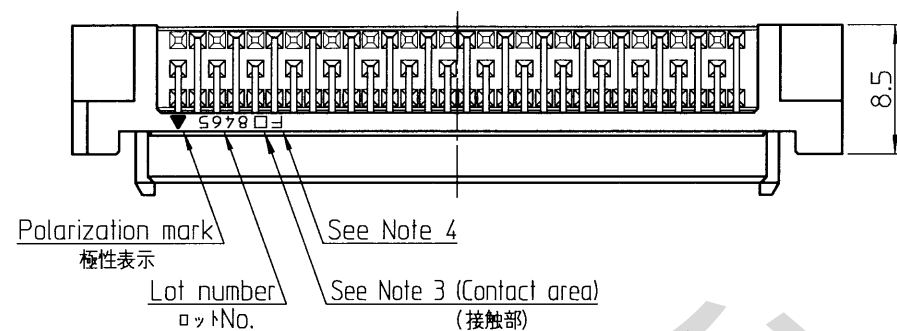



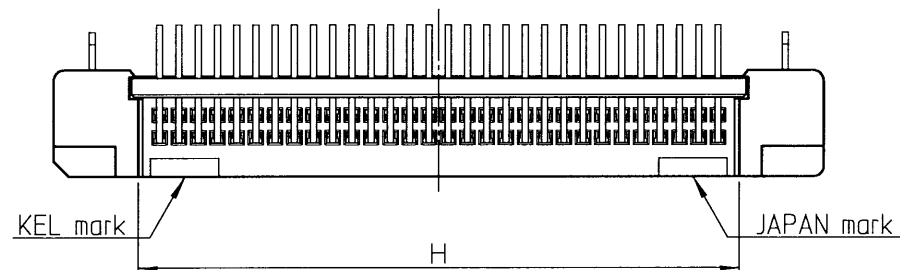


X-X' Cross-section (Scale 5:1)
X-X'断面(5:1)

Notes

- 1) Dimensions are in millimeter. / 単位:mm
2) Unless otherwise specified, tolerance shall be: / 指定なき寸法公差
Less than 10 / 0~10未満 ±0.2
10 ~ 50 / 10~50未満 ±0.25
50 or more / 50以上 ±0.35
3) Contact finish. / コントクトの仕上げ
Under plating Nickel / ニッケルめっき下地
Contact area : Gold / 接触部:金めっき仕上げ
None : 0.05μm or more / 無:0.05μm以上
D : 0.25μm or more / D:0.25μm以上
Terminal area : Tin-copper / テール部:錫銅めっき仕上げ
4) F:RoHS compliant / RoHS対応
5) This drawing is based on 60 pin contacts. / 本図は60極で記載したものである。
6) A reference drawing of P.W.B. / 参考基板設計要領
Board thickness / 適合基板 : 1.6^{+0.2}_{-0.1}
(Connector mounting side / コネクタ搭載面)

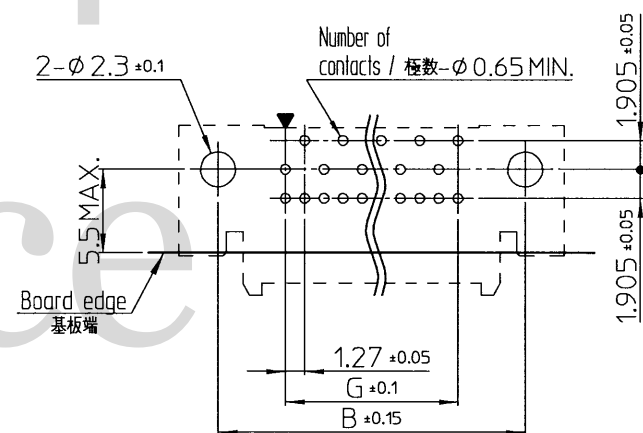

20, 40, 60, 80, 100, 120 pin

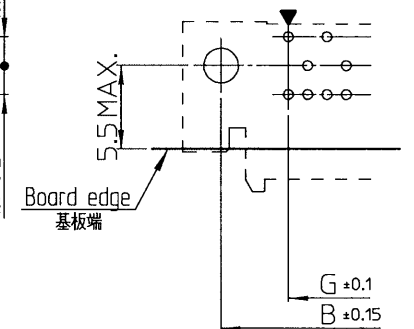

30, 50 pin

4	Mounting hardware 取付金具	2	Copper alloy 銅合金	Tin-copper plating 錫銅めっき
3	Alignment plate 補正板	1	Glass-filled Nylon 66, UL94V-0 66ナイロン ガラス繊維入り UL94V-0	Black 黒色
2	Contact コンタクト	Number of contacts 極数	Copper alloy 銅合金	See Note 3
1	Insulator インシュレータ	1	Glass-filled PPS, UL94V-0 PPS ガラス繊維入り UL94V-0	Natural(Brown) ナチュラル(茶色)
No.	Component 部品	Quantity 数量	Material 材質	Finish 仕上げ

△ ×				
△ ×				
△ ×				
REV. DATE	APPROVED BY	DRAWN BY	DESCRIPTION	
THIRD ANGLE PROJECTION	DRAWN BY T. Megami	DATE Oct. 5, 2018	CHECKED BY N. Saito	DATE Oct. 9, 2018
			APPROVED BY M. Suzuki	DATE Oct. 9, 2018
			SCALE 2:1	
MATERIAL	TITLE 8901-□□□-177L□-F		KEL CORPORATION	
FINISH			DRAWING No. P3D843	REVISION 1