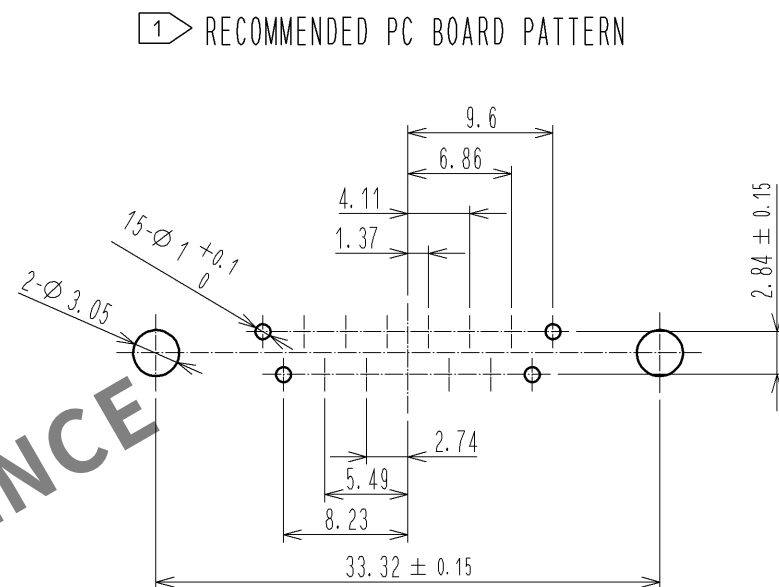
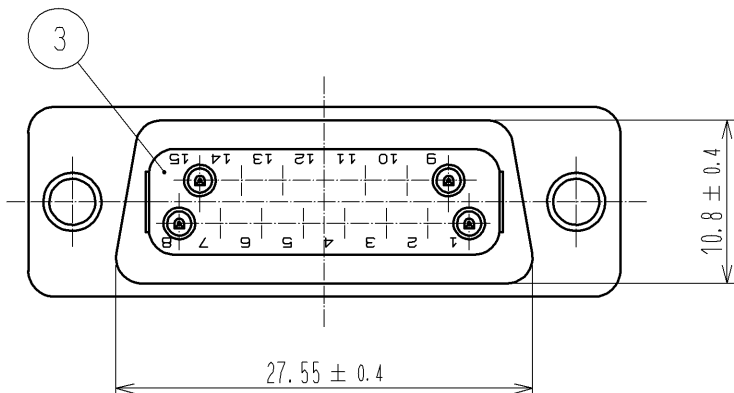
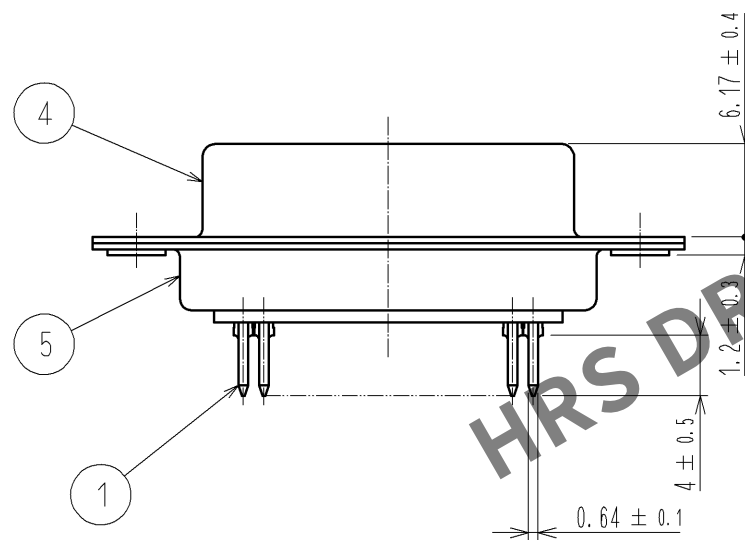
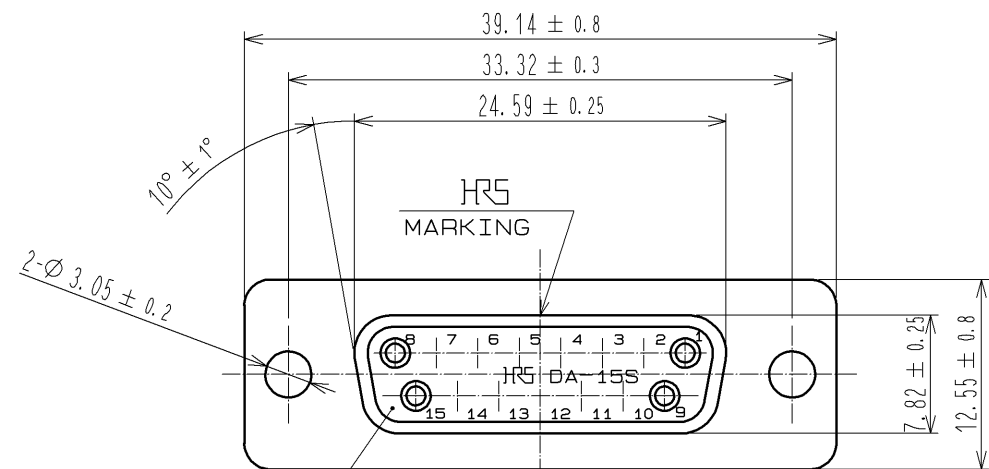



NOTE 1 TOLERANCES SHALL BE ± 0.1 OR LESS UNLESS OTHERWISE SPECIFIED.

2	PBT	BLACK UL94V-0		5	STEEL	OVER:NICKEL 1 μ m MIN. UNDER: COPPER 5 μ m MIN.		
1	PHOSPHOR BRONZE	CONTACT: GOLD 0.2 μ m MIN. LEAD: GOLD 0.03 μ m MIN. UNDER: NICKEL 2 μ m MIN.		4	STEEL	OVER: NICKEL 1 μ m MIN. UNDER: COPPER 5 μ m MIN.		
				3	PBT	BLACK UL94V-0		
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS		
UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED	: RI. TAKAYASU	13.02.22	DRAWING NO.	EDC3-009837-04		
		CHECKED	: EJ. WAKATSUKI	13.02.22	PART NO.	SDAB-15S(55)		
		DESIGNED	: MO. SHIMOYAMA	13.02.22	CODE NO.	CL211-0250-8-55		
		DRAWN	: MO. SHIMOYAMA	13.02.22	 			