
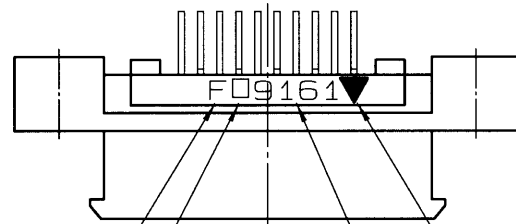


G	F	E	D	C	B	A	Number of Contacts 極数
24.40	11.43	13.13	16.73	21.60	27.40	33.40	20


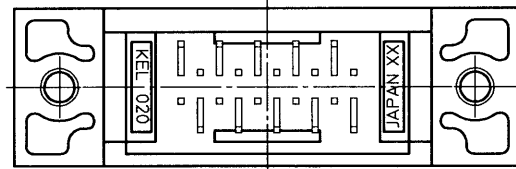


SEE NOTE 3

Polarization mark/極性表示

SEE NOTE 2(contact area/接触部)

Lot Number/ロットNo.

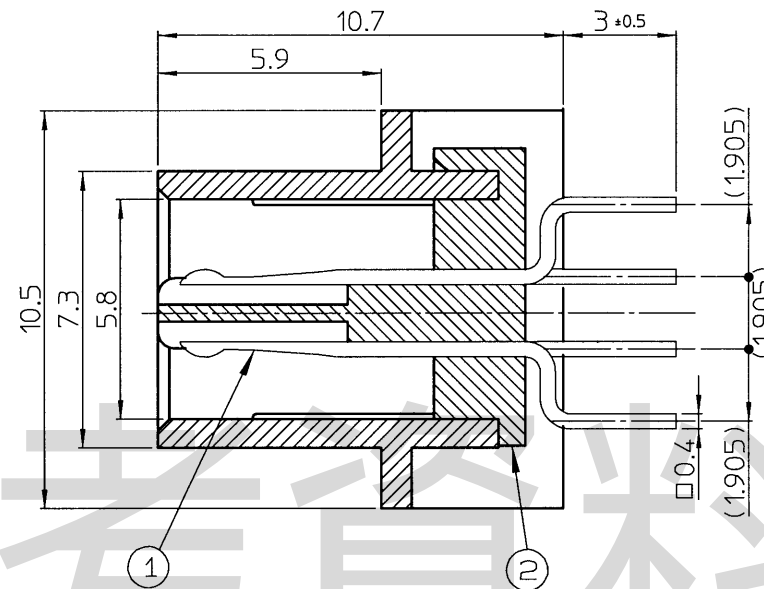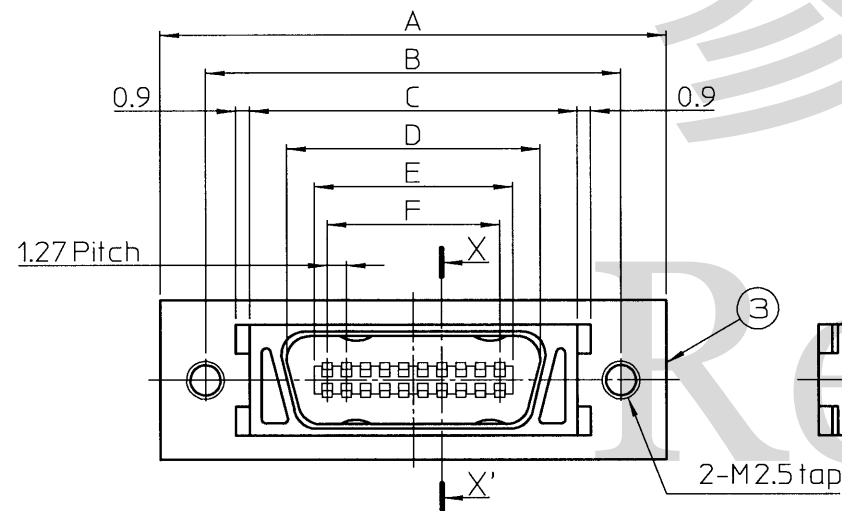

X-X' Cross-section(Scale 5:1)

NOTES

1. Unless otherwise specified, tolerance shall be: / 指定なき寸法公差

Less than 10 / 0~10未満 ±0.2

10 ~ 50 / 10~50未満 ±0.25

50 or more / 50以上 ±0.3

2. Contact finish. / コントクトの仕上げ

Under plating Nickel / ニッケルメッキ下地

Contact area : Gold / 接触部 : 金メッキ仕上

D: 0.25μm or more


H: 0.76μm or more

Terminal area : Tin-copper / テール部 : 錫銅メッキ仕上

3. F: RoHS compliant / RoHS対応品

4. Panel Cutout / パネル取付寸法

Mounting panel thickness / 適合パネル厚: 2.0 or less / 2.0以下

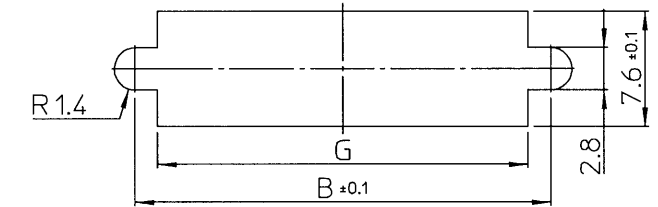

5. A reference drawing of P.W.B. / 基板設計要領



Board thickness / 適合基板厚: t=1.6 ±0.2

(Connector mounting side / コネクタ搭載面)

Shaded area will be the diecast parts

斜線部ダイキャストシェル部

Number of contacts/極数-φ0.8MIN.

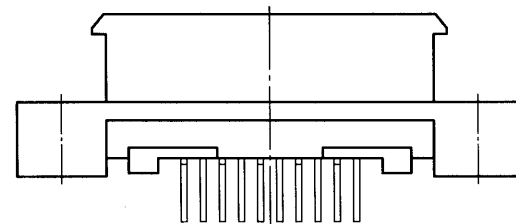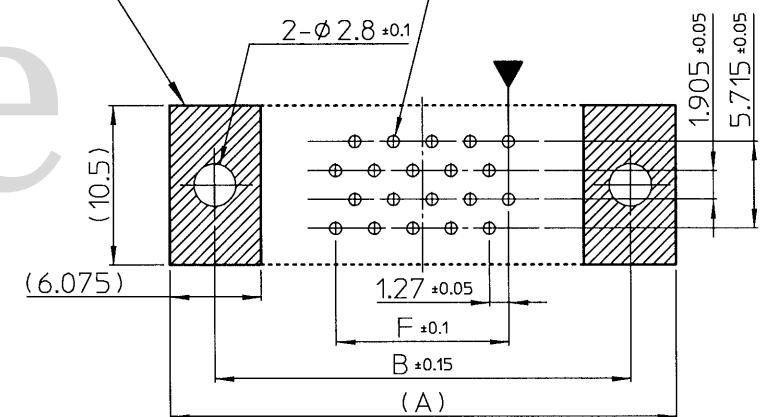

3	Diecast shell ダイキャストシェル	1	Zinc-alloy 亜鉛合金	Nickel plating ニッケルめっき仕上
2	Insulator インシュレータ	1	Nylon 66 Glass-filled, UL94V-0 66ナイロン・ガラス繊維入り UL94V-0	Black 黒色
1	Contact コンタクト	20	Copper-alloy 銅合金	SEE NOTE 2
No.	Component 部品名	Quantity 数量	Material 材質	Finish 仕上

△ ×									
△ ×									
△ ×									
May.26.2021	N. Saito	Y. Abe	K. Choshi	Revised for style change. / 様式変更のため、改版。					
REV. DATE	APPROVED BY	CHECKED BY	DRAWN BY	DESCRIPTION					
THIRD ANGLE PROJECTION	DRAWN BY Y. Abe	DATE Nov. 28, 2018	CHECKED BY N. Saito	DATE Nov. 28, 2018	APPROVED BY M. Suzuki	DATE Nov. 28, 2018	SCALE 2:1	UNIT mm	
MATERIAL	TITLE 8850-020-170S□-F				KEL CORPORATION				
FINISH					DRAWING No. P3D816		REVISION 2		