
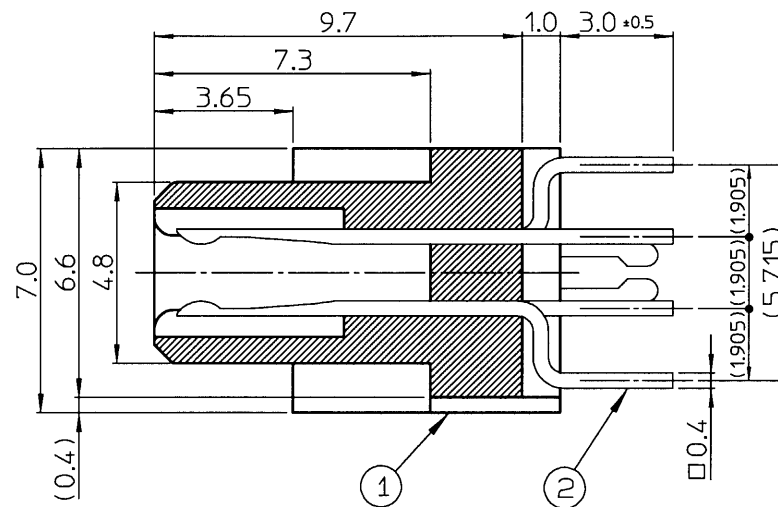
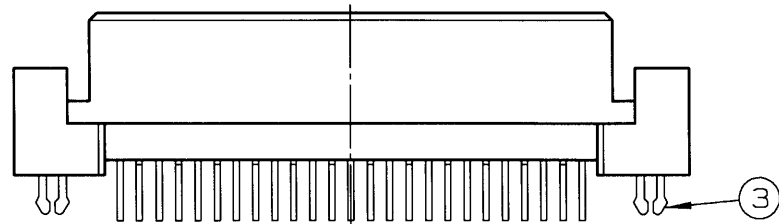
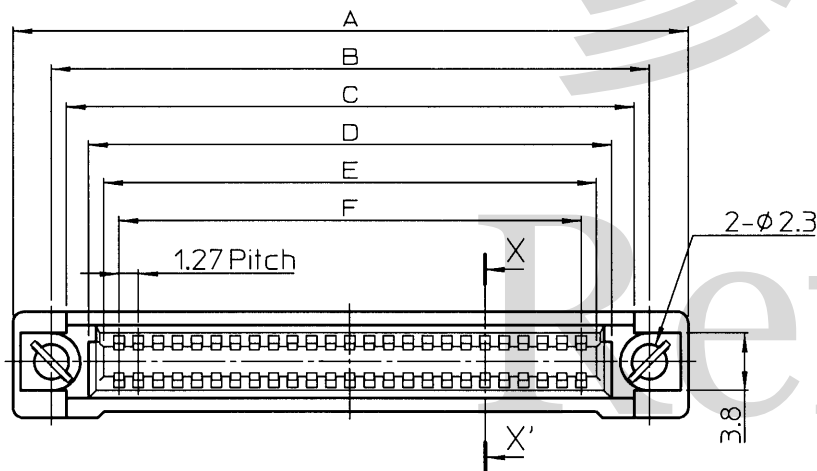
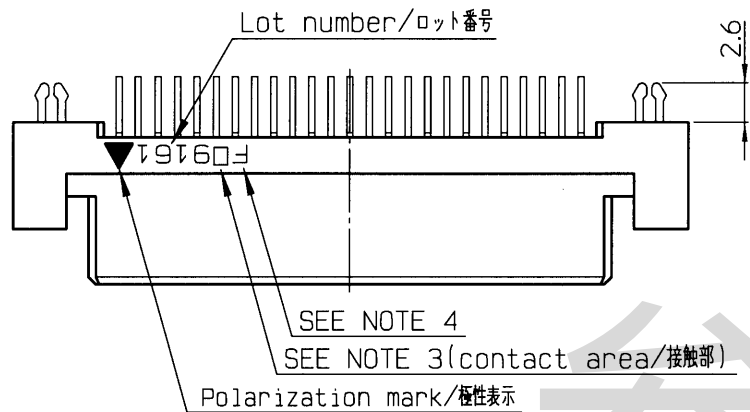





X-X' Cross-section(Scale 5:1)


NOTES

- Dimensions are in millimeter.
- Unless otherwise specified, tolerance shall be /指定なき寸法公差
Less than 10. / 0~10未満 ±0.2
10 or more ~ Less than 50. / 10~50未満 ±0.25
50 or more. / 50以上 ±0.3
- Contact finish. /コンタクトの仕上
Under plating Nickel /ニッケルメッキ下地
Contact area : Gold /接触部 : 金メッキ仕上
None: 0.05μm or more /0.05μm以上
D: 0.25μm or more /0.25μm以上
H: 0.76μm or more /0.76μm以上
Terminal area: Tin-copper plating /テール部: 錫銅メッキ仕上
- F: RoHS compliant /RoHS対応品
- This drawing is based on 8801-050-170SD-F. /本図は、50極で記載したものである。
- A reference drawing of P.W.B. /基板設計要領
Board thickness /適合基板厚 t=1.6±0.1

(Connector mounting side / コネクタ搭載面)

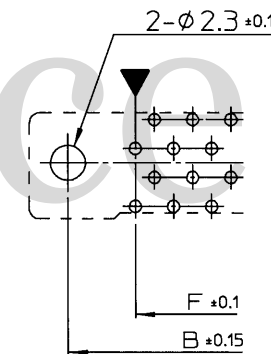

20・32・40・52・60・68・80・100 pin

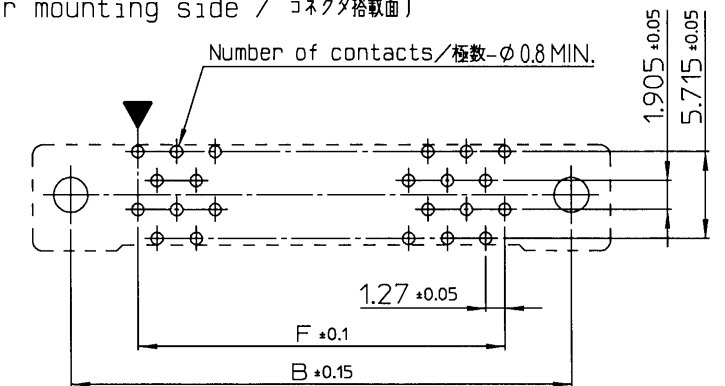

26・30・34・50 pin

F	E	D	C	B	A	Number of Contacts 極数
11.43	13.43	15.43	18.33	20.32	25.43	20
15.24	17.24	19.24	22.14	24.13	29.24	26
17.78	19.78	21.78	24.68	26.67	31.78	30
19.05	21.05	23.05	25.95	27.94	33.05	32
20.32	22.32	24.32	27.22	29.21	34.32	34
24.13	26.13	28.13	31.03	33.02	38.13	40
30.48	32.48	34.48	37.38	39.37	44.48	50
31.75	33.75	35.75	38.65	40.64	45.75	52
36.83	38.83	40.83	43.73	45.72	50.83	60
41.91	43.91	45.91	48.81	50.80	55.91	68
49.53	51.53	53.53	56.43	58.42	63.53	80
62.23	64.23	66.23	69.13	71.12	76.23	100

3	Mounting hardware 取付金具	2	Copper alloy 銅合金	Tin-copper plating 錫銅メッキ仕上
2	Contact コンタクト	Number of contacts 極数	Copper alloy 銅合金	SEE NOTE3
1	Insulator インシュレータ	1	Nylon 66 Glass-filled, UL94V-0 66ナイロン ガラス繊維入り UL94V-0	Black 黒
No.	Component 部品名	Quantity 数量	Material 材質	finish 仕上

△ ×				
△ ×				
△ ×				
Mar. 16, 2020	N. Saito	T. Megami	S. Ichikawa	Revised for style change. /様式変更の為、改版。
REV. DATE	APPROVED BY	CHECKED BY	DRAWN BY	DESCRIPTION
THIRD ANGLE PROJECTION	DRAWN BY Y. Abe Aug. 10, 2018	DATE Aug. 10, 2018	CHECKED BY N. Saito Aug. 10, 2018	DATE Aug. 10, 2018
MATERIAL	TITLE			
FINISH	8801-□□□-170SD-F			
KEL CORPORATION				REVISION
DRAWING No. P3D760				2