



- ## MOUNTING OF CONNECTOR

5

6

11

PLEASE DO NOT ALLOW A GAP BETWEEN THE EDGE OF PCB AND CONNECTOR.

3


0-80UNF-2A OUTSIDE DRAWING

t2


L

PLEASE MOUNT THE CONNECTOR AS LOCATED IN THE MIDDLE OF SIGNAL PAD OF PCB.

RECOMMENDED PC BOARD PATTERN DRAWING

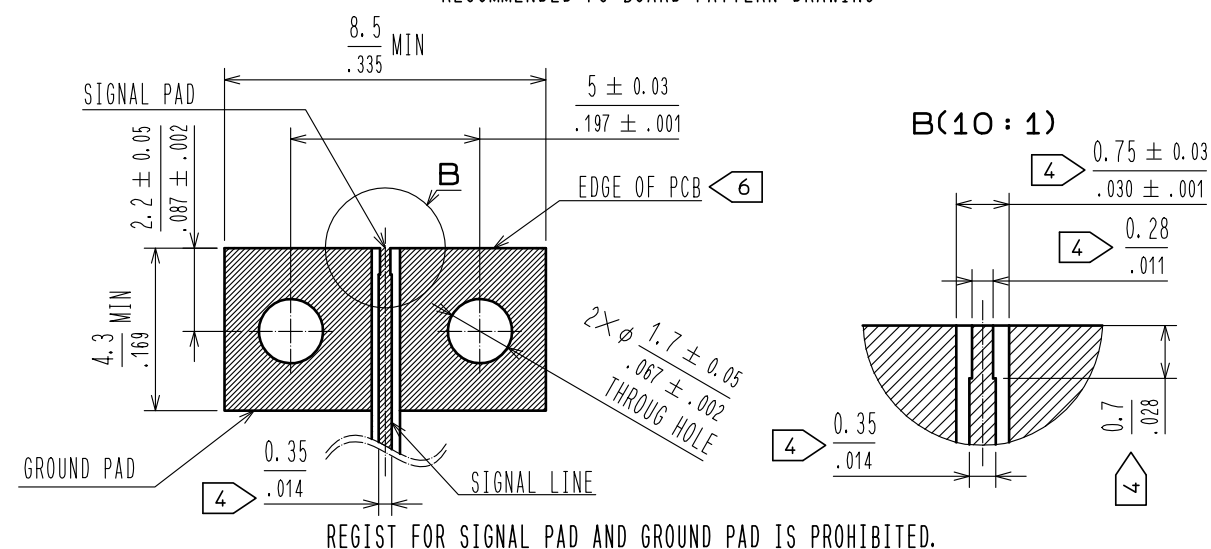

3	BERYLLIUM COPPER	GOLD PLATING	7	STAINLESS STEEL	SPRING WASHER
2	STAINLESS STEEL	PASSIVATE	6	STELL	0-80UNF-2A SCREW
1	BRASS	GOLD PLATING	5	POLYETHER IMIDE	
			4	POLYETHER IMIDE	
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS

UNITS [mm/in]		SCALE 5 : 1		COUNT 1	DESCRIPTION OF REVISIONS DIS-D-00016663	DESIGNED RO. YOKOYAMA	CHECKED TS. KANEKO	DATE 20230811
 HIROSE ELECTRIC CO., LTD.					APPROVED : TS. NOBE 20191008	DRAWING NO. EDC-384075-11-00		
					CHECKED : AK. NINOMIYA 20191008	PART NO. HV-LR-SR2(11)		
					DESIGNED : NH. MARUYAMA 20191008	CODE NO. CL0338-0018-0-11		
					DRAWN : AH. MARUYAMA 20191008	 1/1		