
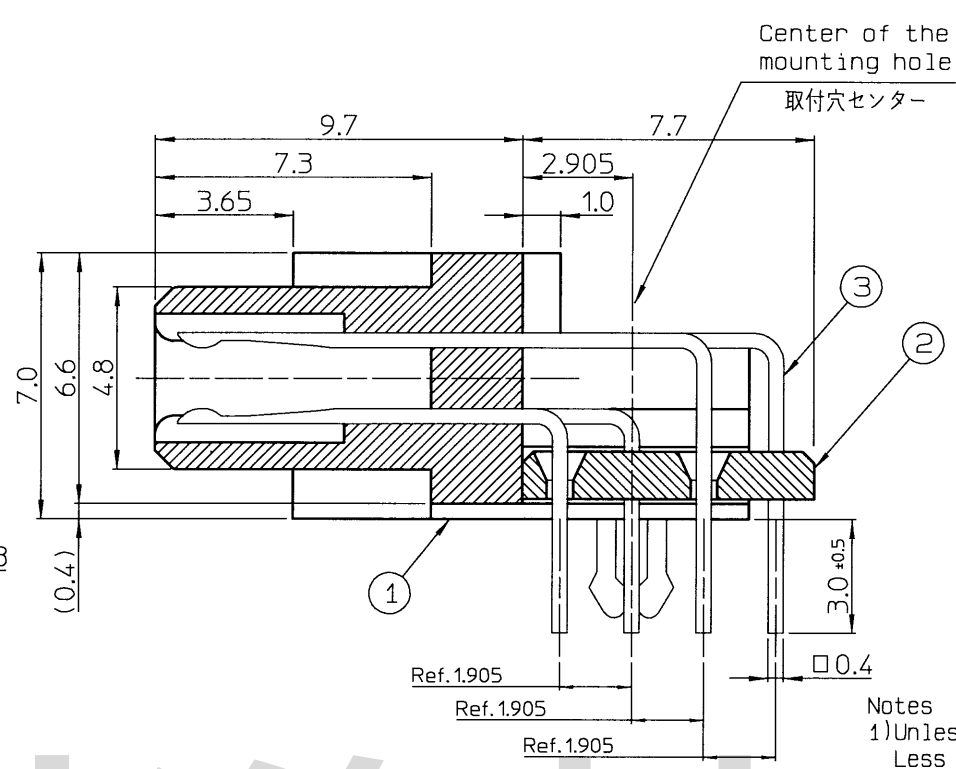


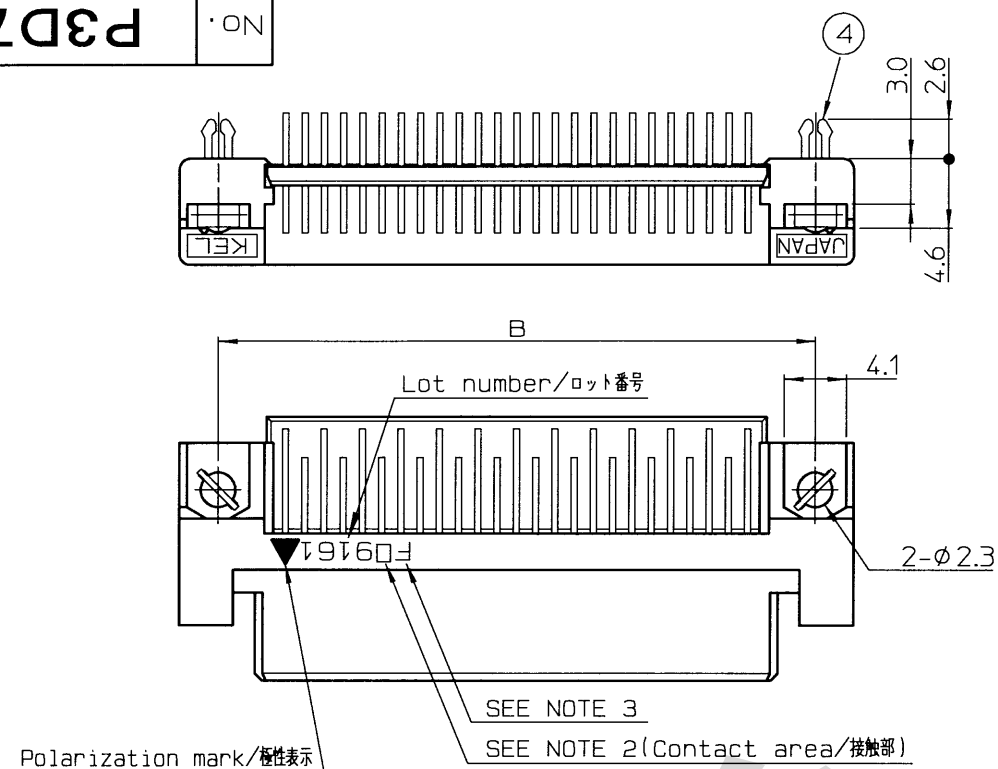

F	E	D	C	B	A	No. of contacts 極数
11.43	13.43	15.43	18.33	20.32	25.43	20
15.24	17.24	19.24	22.14	24.13	29.24	26
17.78	19.78	21.78	24.68	26.67	31.78	30
19.05	21.05	23.05	25.95	27.94	33.05	32
20.32	22.32	24.32	27.22	29.21	34.32	34
24.13	26.13	28.13	31.03	33.02	38.13	40
30.48	32.48	34.48	37.38	39.37	44.48	50
31.75	33.75	35.75	38.65	40.64	45.75	52
36.83	38.83	40.83	43.73	45.72	50.83	60
41.91	43.91	45.91	48.81	50.80	55.91	68
49.53	51.53	53.53	56.43	58.42	63.53	80
62.23	64.23	66.23	69.13	71.12	76.23	100

Notes

1) Unless otherwise specified, tolerance shall be: / 指定なき寸法公差

Less than 10 / 0~10未満 ±0.2

10 ~ 50 / 10~50未満 ±0.25

50 or more / 50以上 ±0.3

2) Contact finish. / コンタクトの仕上げ

Under plating Nickel / ニッケルメッキ下地

Contact area : Gold / 接触部 : 金メッキ仕上げ

NONE : Au 0.05μm or more

D : Au 0.25μm or more

H : Au 0.76μm or more

Tail area : Tin-copper plating / テール部 : 錫銅メッキ仕上げ





3) F: RoHS Compliant / RoHS対応品

4) This drawing is based on 50 pin contacts. / 本図は、50極で記載したものである。


5) A reference drawing of P.W.B. / 参考基板設計要領

Board thickness / 適合基板厚 t=1.6^{+0.2}_{-0.1}

Only 80・100 pins
have slits.
80・100極の場合のみ
スリット(溝)有り

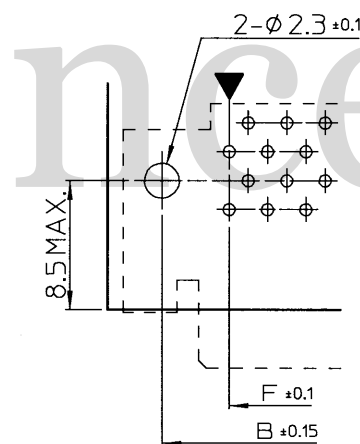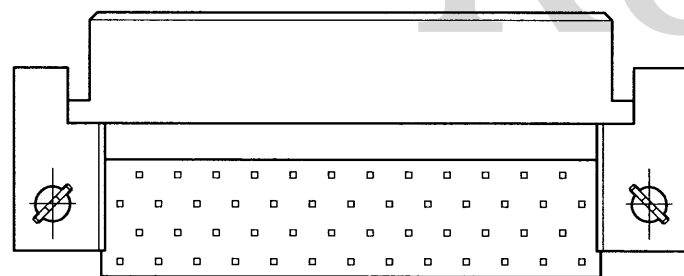

20・32・40・52・60・68・80・100 Pin

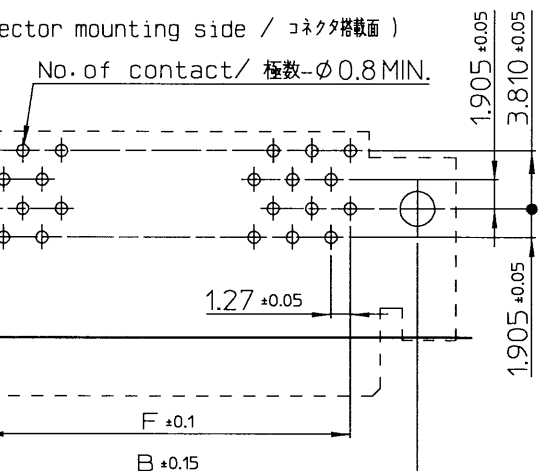

26・30・34・50 Pin

4	Mounting hardware 取付金具	2	Copper alloy 銅合金	Tin-copper plating 錫銅メッキ
3	Contact コンタクト	No. of contacts 極数	Copper alloy 銅合金	SEE NOTE 2
2	Terminal setting plate 補正板	1	Nylon 66 Glass-filled, UL94V-0 66ナイロン・ガラス繊維入り UL94V-0	Black 黒色
1	Insulator インシュレータ	1	Nylon 66 Glass-filled, UL94V-0 66ナイロン・ガラス繊維入り UL94V-0	Black 黒色
No.	Component 部品名	Quantity 数量	Materials 材質	Finish 仕上

△ ×								
△ ×								
△ ×								
May. 21, 2019	N. Saito	T. Moganai	Y. Abe	Revised for style change. / 様式変更の為、改版。				
REV. DATE	APPROVED BY	CHECKED BY	DRAWN BY	DESCRIPTION				
THIRD ANGLE PROJECTION	DRAWN BY Y. Abe	DATE Aug. 10, 2018	CHECKED BY N. Saito	DATE Aug. 10, 2018	APPROVED BY M. Suzuki	DATE Aug. 10, 2018	SCALE 2:1	UNIT mm
MATERIAL	TITLE				KEL CORPORATION			
FINISH	8801-□□□-170L□-F				DRAWING No.		P3D761	REVISION 2