


Sep.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

Assembly tool:Applicable outer conductor crimping tool HT303/HRM-T-4 (58A/U Hole)

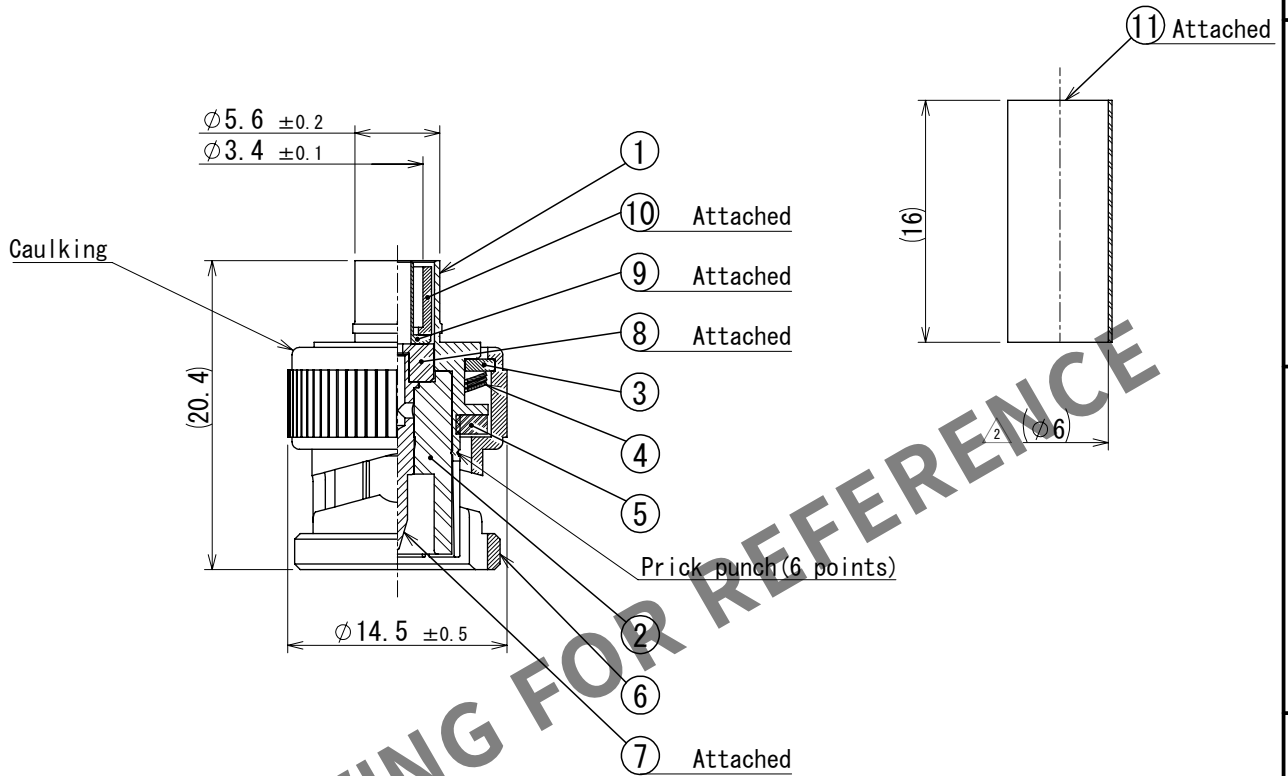

6	Brass	Nickel plating			
5	Silicone rubber		11	Polyolefin	Heat shrink tubing (Black)
4	Beryllium copper	Silver plating	10	Brass	Nickel plating
3	Brass	Nickel plating	9	Brass	Nickel plating
2	PTFE		8	PTFE	
1	Brass	Nickel plating	7	Brass	Gold plating
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS

UNITS mm		SCALE 2:1	COUNT 1	DESCRIPTION OF REVISIONS DIS-D-00016375	DESIGNED MK. INOUE	CHECKED NK. NINOMIYA	DATE 2023. 07. 12
APPROVED : NK. NINOMIYA 2021. 11. 09				DRAWING NO. EDC-134093-40-00			
CHECKED : NK. NINOMIYA 2021. 11. 09				PART NO. BNC-P-1. 5DQSCR (40)			
DESIGNED : MT. KANEKO 2021. 11. 09				CODE NO. CL0302-0383-9-40			
DRAWN : NK. OOSHIMA 2021. 11. 09							