

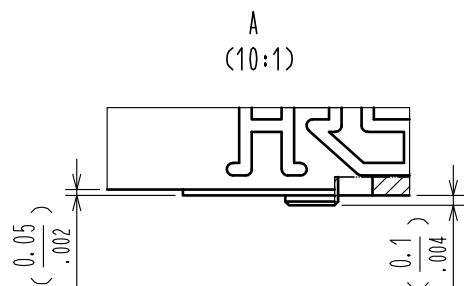
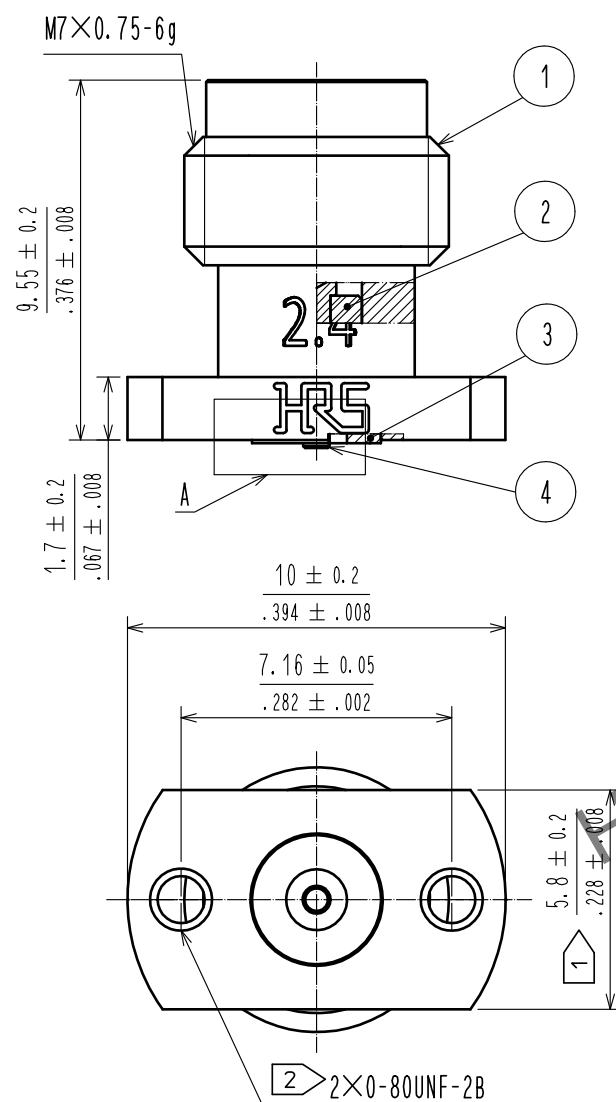
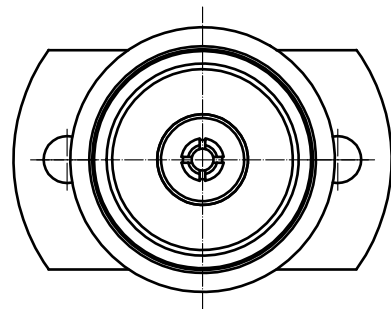
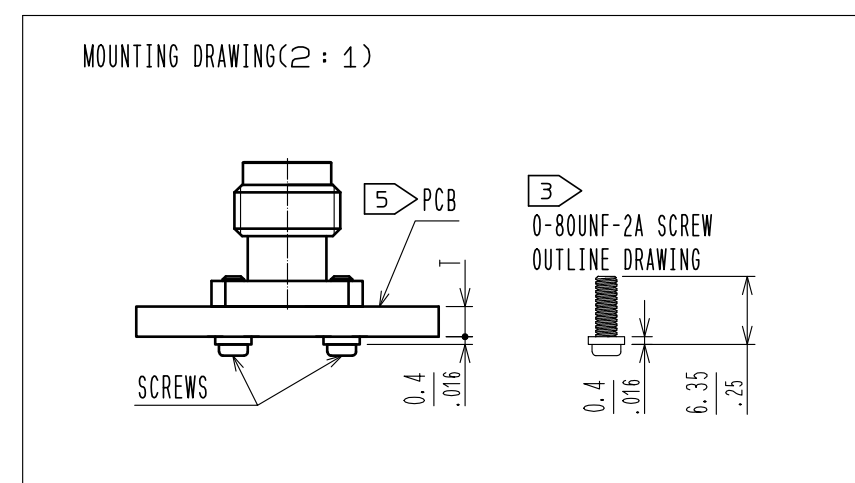
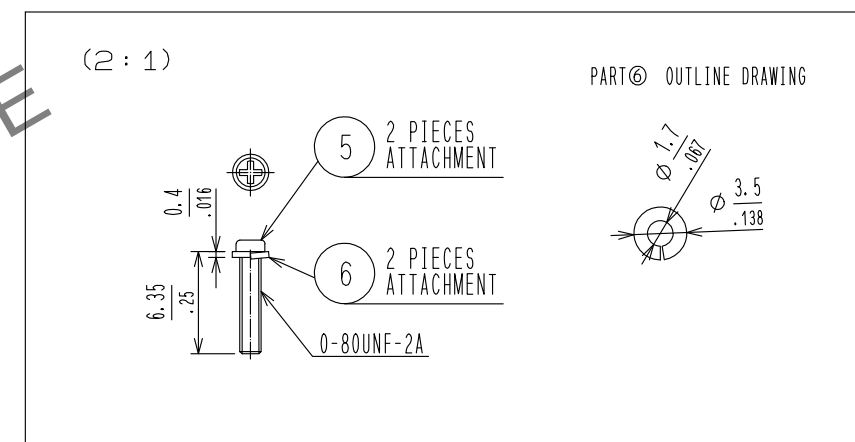
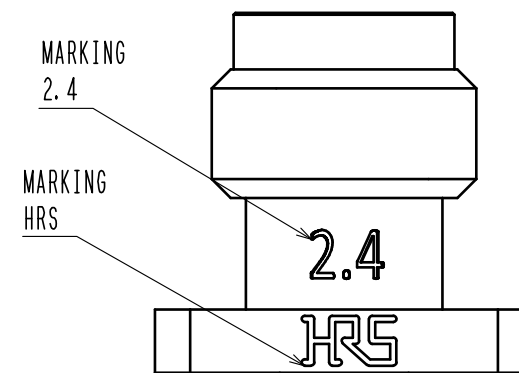
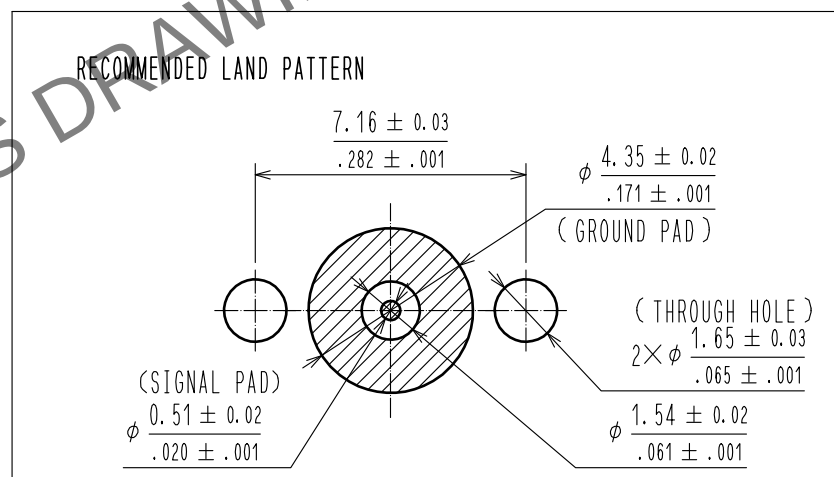


Sep.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

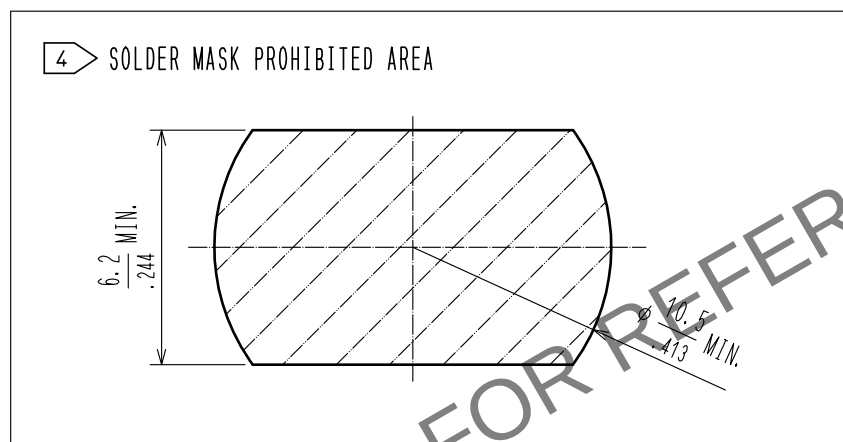

- NOTES
- PLEASE HOLD THE FLANGE WITH A SPANNER WHEN MATING THE CONNECTOR TO AVOID ANY TORQUE ACTING ON THE PCB.
 - 0-80UNF-2B SCREWS TIGHTENING TORQUE SHOULD BE $0.09\text{N} \cdot \text{m}$.
PLEASE TIGHTEN THE SCREWS EVENLY WHEN MOUNTING THE CONNECTORS TO ENSURE STABLE ELECTRICAL CONTACT.
 - PLEASE USE ATTACHED SCREWS AND WASHERS FOR MOUNTING.
ATTACHED SCREWS AND WASHERS ARE APPLICABLE ON PCB WITH THICKNESS $T=2.4$ TO 4.25mm .
 - THE SOLDER MASK PROHIBITED AREA IS INDICATED.
 - THIS PRODUCT IS A SOLDERLESS CONNECTOR FOR PROTOTYPE EVALUATION OF HIGH SPEED TRANSMISSION BOARDS.
IT IS NOT RECOMMENDED FOR USE IN ACTUAL COMMERCIAL EQUIPMENT.



3	BERYLLIUM COPPER	GOLD PLATING	6	STAINLESS STEEL	SPRING WASHER			
2	PTFE		5	STEEL	0-80UNF-2A SCREW			
1	STAINLESS STEEL	PASSIVATE	4	STAINLESS STEEL	GOLD PLATING			
NO.	MATERIAL	FINISH.	REMARKS	NO.	MATERIAL	FINISH.	REMARKS	
UNITS mm/inch		SCALE 5 : 1	COUNT  1	DESCRIPTION OF REVISIONS DIS-D-00016641		DESIGNED TS. KANEKO	CHECKED TS. NAKAGAWA	DATE 20230824
 HIROSE ELECTRIC CO., LTD.		APPROVED	TS. NOBE	20180425	DRAWING NO. EDC-381620-11-00			
		CHECKED	MH. OGUSU	20180425	PART NO. H2. 4-R-SR2-1(11)			
		DESIGNED	AH. MARUYAMA	20180425	CODE NO. CL0338-0607-0-11			
		DRAWN	EDWIN TANG	20180425	 1			