




Part Number : [26202031](#)
Product Description : KK 396 Wire-to-Board Header, Vertical Round Pin, 3 Circuits, Tin (Sn) Plating, with Mating Pin Length of 11.43mm (.450")
Series Number : 3192
Status : Active
Product Category : PCB Headers and Receptacles
Engineering Number : 3192-03A

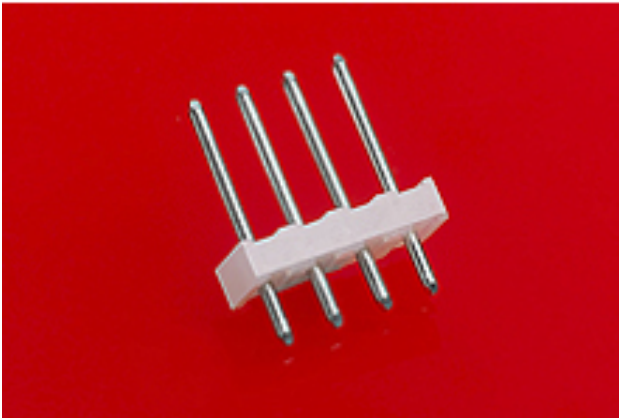

Documents & Resources


Drawings
[026202031_sd.pdf](#)
[PK-3192-001-001.pdf](#)

3D Models and Design Files
[026202031_stp.zip](#)
[SYM-26-20-2031-001.zip](#)

Specifications
[PS-99020-0087-001.pdf](#)

Product Environment Compliance

Compliance

| | |
|--------------------|---|
| GADSL/IMDS | Not Relevant |
| China RoHS |  |
| EU ELV | Not Relevant |
| Low-Halogen Status | Low-Halogen per IEC 61249-2-21 |
| REACH SVHC | Not Contained per D(2023)3788-DC (14 Jun 2023) |
| EU RoHS | Compliant per EU 2015/863 |

Multiple Part Product Compliance Statements
- Eu RoHS
- REACH SVHC
- Low-Halogen

Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

EU RoHS Certificate of Compliance

Part Details

General

| | |
|----------------|--|
| Status | Active |
| Category | PCB Headers and Receptacles |
| Series | 3192 |
| Description | KK 396 Wire-to-Board Header, Vertical Round Pin, 3 Circuits, Tin (Sn) Plating, with Mating Pin Length of 11.43mm (.450") |
| Application | Board-to-Board, Power, Wire-to-Board |
| Component Type | PCB Header |
| Product Name | KK 396 |
| UPC | 800753735095 |

Agency

| | |
|----|--------|
| UL | E29179 |
|----|--------|

Electrical

| | |
|-------------------------------|------|
| Current - Maximum per Contact | 7.0A |
| Voltage - Maximum | 250V |

Physical

| | |
|--------------------------------|---------|
| Breakaway | No |
| Circuits (Loaded) | 3 |
| Circuits (maximum) | 3 |
| Color - Resin | Natural |
| Durability (mating cycles max) | 25 |
| First Mate / Last Break | No |

| | |
|--------------------------------|---------------------------|
| Flammability | 94V-2 |
| Glow-Wire Capable | No |
| Guide to Mating Part | No |
| Keying to Mating Part | None |
| Lock to Mating Part | None |
| Material - Metal | Brass |
| Material - Plating Mating | Tin |
| Material - Plating Termination | Tin |
| Material - Resin | Nylon |
| Net Weight | 0.735/g |
| Number of Rows | 1 |
| Orientation | Vertical |
| Packaging Type | Bag |
| PC Tail Length | 4.45mm |
| PCB Locator | No |
| PCB Retention | None |
| PCB Thickness - Recommended | 1.60mm |
| Pitch - Mating Interface | 3.96mm |
| Pitch - Termination Interface | 3.96mm |
| Plating min - Mating | 5.080µm |
| Plating min - Termination | 5.080µm |
| Polarized to Mating Part | No |
| Polarized to PCB | No |
| Shrouded | No |
| Stackable | Yes |
| Temperature Range - Operating | See Product Specification |
| Termination Interface Style | Through Hole |

Solder Process Data

| | |
|------------------------------|------|
| Max-Duration | 5 |
| Lead-Free Process Capability | WAVE |
| Max-Cycle | 1 |
| Max-Temp | 235 |

Mates With / Use With

Mates with Part(s)

| Description | Part Number |
|-------------------------------------|-------------|
| KK 3.96mm Single Row Crimp Housings | <u>3069</u> |