NO. P33970

B	A	No. of contacts 極数
7.62	5.08	3
10.16	7.62	4
20.32	17.78	8
30.48	27.94	12
60.96	58.42	24
121.92	119.38	48

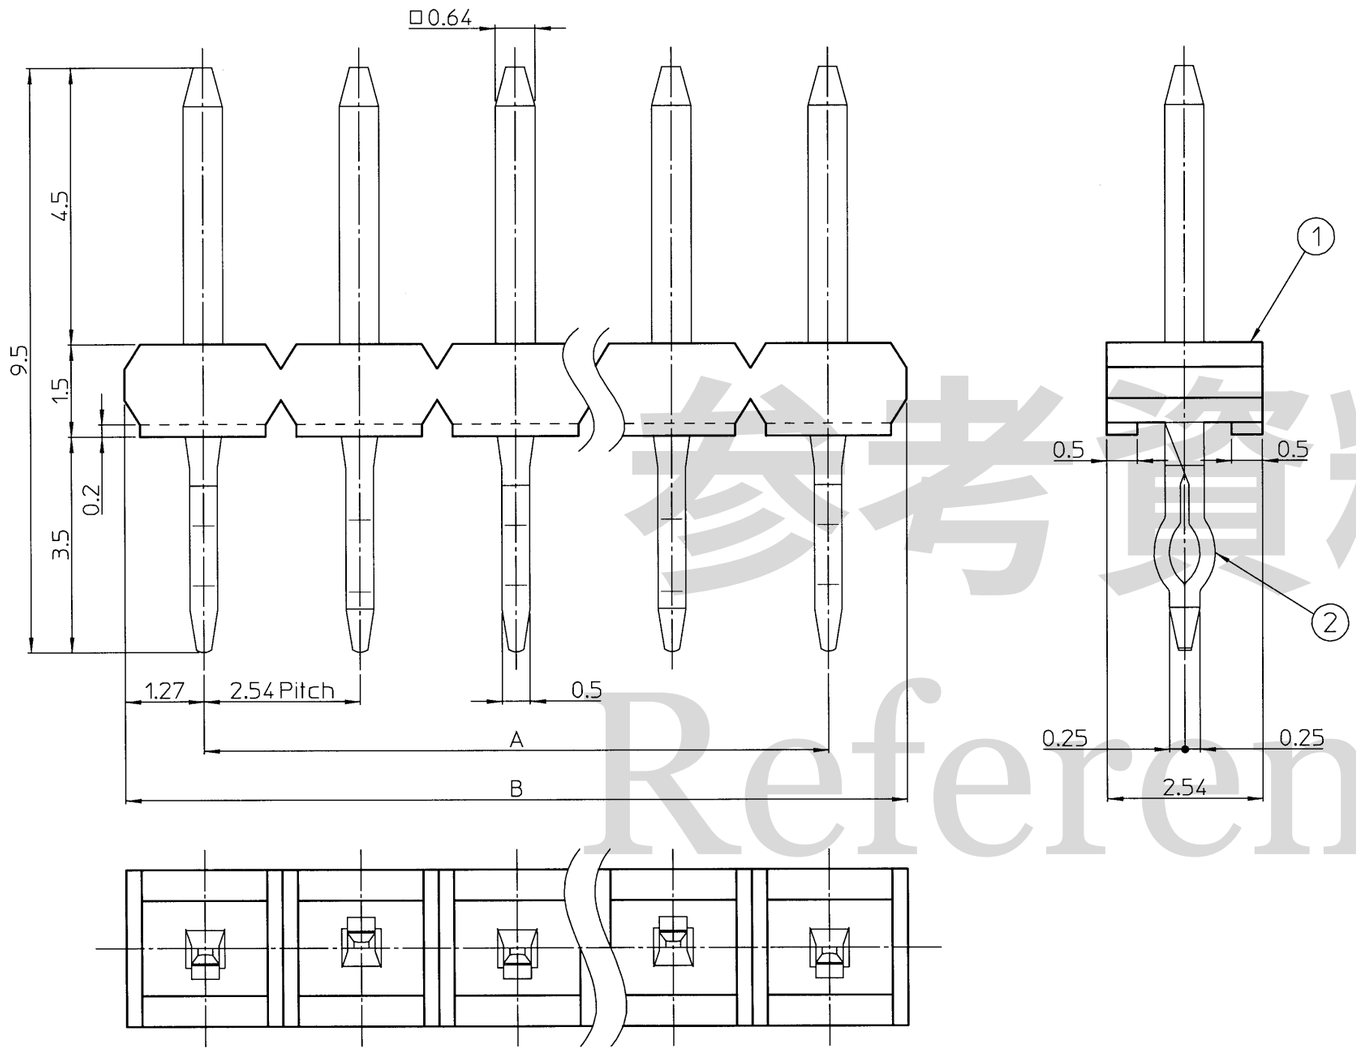

NOTES

1. Unless otherwise specified tolerance shall be: / 指定なき寸法公差:±0.2

2. A reference drawing of P.W.B. / 参考基板設計要領

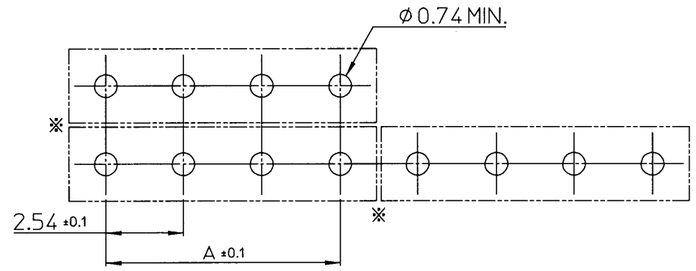

※Possible to use continuous / 連続使用可

3. Contact finish. / コンタクト仕上
   Under plating Nickel / ニッケルメッキ下地
   Gold plating / 金メッキ仕上

4. Part number / 品名コード

DSP03 - □□□ - 432 G
- Contact finish / コンタクト仕上 G:Gold plating / 金メッキ仕上
- Contact name / コンタクト名
- Number of contacts / 極数
  - 003: 3 pins / 3極　004: 4 pins / 4極
  - 008: 8 pins / 8極　012:12 pins / 12極
  - 024:24 pins / 24極　048:48 pins / 48極
- Series name / シリーズ名 Single inline plug / 1列プラグ、オス側

5. The directions of the kink may be reversed.
キンクの向きが逆の場合があります。

参考資料
Reference

No.	Component 部品名	Quantity 数量	Material 材質	Finish 仕上
2	Contact コンタクト	Number of contacts 極数	Brass 黄銅	SEE NOTE3
1	Insulator インシュレータ	1	Glass-filled Nylon 66, UL94V-0 66ナイロン ガラス繊維入り UL94V-0	Black 黒色

REV.	DATE	APPROVED BY	CHECKED BY	DRAWN BY	DESCRIPTION
3 ×					
2 ×					
1 ×					
	Jul. 19. 2021	N. Saito	T. Mogami	K. Shimada	Reviced for style change. /様式変更の為、改版.

THIRD ANGLE PROJECTION	DRAWN BY	DATE	CHECKED BY	DATE	APPROVED BY	DATE	SCALE	UNIT
	Y. Maeda	Aug. 21. 1984	T. Sakai	Aug. 21. 1984	A. Katsumata	Aug. 21. 1984	10:1	mm

MATERIAL

FINISH

TITLE DSP03-□□□-432G

KEL CORPORATION

DRAWING No. P33970

REVISION 2