

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

LOC  
J

DIST

REVISIONS  
変更

P  
E

LTR

DESCRIPTION  
REVISED PER-ECR-20-011859

DATE  
21AUG2020

DWN  
M. J

APVD  
E. I

2.5

2.5Xn=A

CAVITY MARK  
(ALPHABET:CAPITAL LETTER)

3.3

3.3

01 6 8 3 2 1

CIRCUIT NO

COMPANY LOGO

SERIES CODE

KEYING: X

D

C

B

2.5

2.5Xn=A

3.3

20POS(X-KEY): 1-1827864-0

SCALE 1:1

ROW ID

12.45

11.3

8.6

9.4

9

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:  
単位: 耗  
mm

TOLERANCES UNLESS  
OTHERWISE SPECIFIED:  
一般公差 ±0.3, ±5°  
0-PLC ±  
1-PLC ±  
2-PLC ±  
3-PLC ±  
4-PLC ±  
ANGLES ±  
FINISH  
仕上

MATERIAL  
材料

DWN  
T. KUDO 23AUG2005

CHK  
D. MITSUGI 23AUG2005

APVD  
D. MITSUGI 23AUG2005

PRODUCT SPEC  
製品規格  
108-78268, 78298

APPLICATION SPEC  
取付適用規格  
114-5377

WEIGHT

CUSTOMER DRAWING

SCALE  
尺度 4:1

SHEET  
1

OF  
4

REV  
E

1. MATERIAL: GLASS FILLED THERMO PLASTIC  
POLYESTER(94V-0), COLOR: BLACK

2. THE SHAPE, SIZE AND POSITION  
OF THE CHARACTER SHOW THE OUTLINE.  
THEY DON'T SHOW DETAILS.

3. THE KEYING ARRANGEMENT OF "Y" IS  
SYMMETRIC WITH "X".

4. DIFFERENT HEIGHT OF LOCK PROTECTOR.  
A FINGERTIP IS STOOD AND PUSHED  
WHEN OPERATING A LOCK LEVER.

1. 材料: ガラス入り熱可塑性ポリエステル樹脂(94V-0), 色: 黒

2. 文字の形状、大きさ、および位置については、大略を示すものであり、  
詳細を示すものではありません。

3. Y KEY形状は、X KEY形状と左右対称

4. LOCK PROTECTORの高さ違いです。  
ロックレバー操作の際には、指先を立てて押してください。

|     |     |   |      |      |      |     |             |
|-----|-----|---|------|------|------|-----|-------------|
| 20  | Y   | 9 | 22.5 | 25.9 | 27.6 | 8.3 | 2-1827864-0 |
| 20  | X   | 9 | 22.5 | 25.9 | 27.6 | 8.3 | 1-1827864-0 |
| 16  | Y   | 7 | 17.5 | 20.9 | 22.6 | 8.3 | 2-1827864-8 |
| 16  | X   | 7 | 17.5 | 20.9 | 22.6 | 8.3 | 1-1827864-8 |
| 12  | Y   | 5 | 12.5 | 15.9 | 17.6 | 8.3 | 2-1827864-6 |
| 12  | X   | 5 | 12.5 | 15.9 | 17.6 | 8.3 | 1-1827864-6 |
| 12  | X   | 5 | 12.5 | 15.9 | 17.6 | 8.3 | 9-1827864-6 |
| 10  | Y   | 4 | 10.0 | 13.4 | 15.1 | 3.3 | 2-1827864-5 |
| 10  | X   | 4 | 10.0 | 13.4 | 15.1 | 3.3 | 1-1827864-5 |
| 8   | Y   | 3 | 7.5  | 10.9 | 12.6 | 3.3 | 2-1827864-4 |
| 8   | X   | 3 | 7.5  | 10.9 | 12.6 | 3.3 | 1-1827864-4 |
| 6   | Y   | 2 | 5.0  | 8.4  | 10.1 | 3.3 | 2-1827864-3 |
| 6   | X   | 2 | 5.0  | 8.4  | 10.1 | 3.3 | 1-1827864-3 |
| 6   | X   | 2 | 5.0  | 8.4  | 10.1 | 3.3 | 9-1827864-3 |
| 4   | Y   | 1 | 2.5  | 5.9  | 7.6  | 3.1 | 2-1827864-2 |
| 4   | X   | 1 | 2.5  | 5.9  | 7.6  | 3.1 | 1-1827864-2 |
| 4   | X   | 1 | 2.5  | 5.9  | 7.6  | 3.1 | 9-1827864-2 |
| POS | KEY | n | A    | B    | C    | D   | PART NO     |

TE Connectivity

DYNAMIC DI200D 2.5mm PITCH  
REC HSG  
4-20 POS

SIZE  
A3

CAGE CODE  
00779

DRAWING NO  
C-1827864

RESTRICTED TO

THIS DRAWING IS UNPUBLISHED.


RELEASED FOR PUBLICATION

© COPYRIGHT -

ALL RIGHTS RESERVED.

| LOC | DIST | REVISIONS |     |             |    | DATE | DWN | APVD |
|-----|------|-----------|-----|-------------|----|------|-----|------|
|     |      | P         | LTR | DESCRIPTION | 変更 |      |     |      |
| J   |      | -         |     | SEE SHEET 1 |    | -    | -   | -    |

CAVITY MARK  
ONLY 4POS

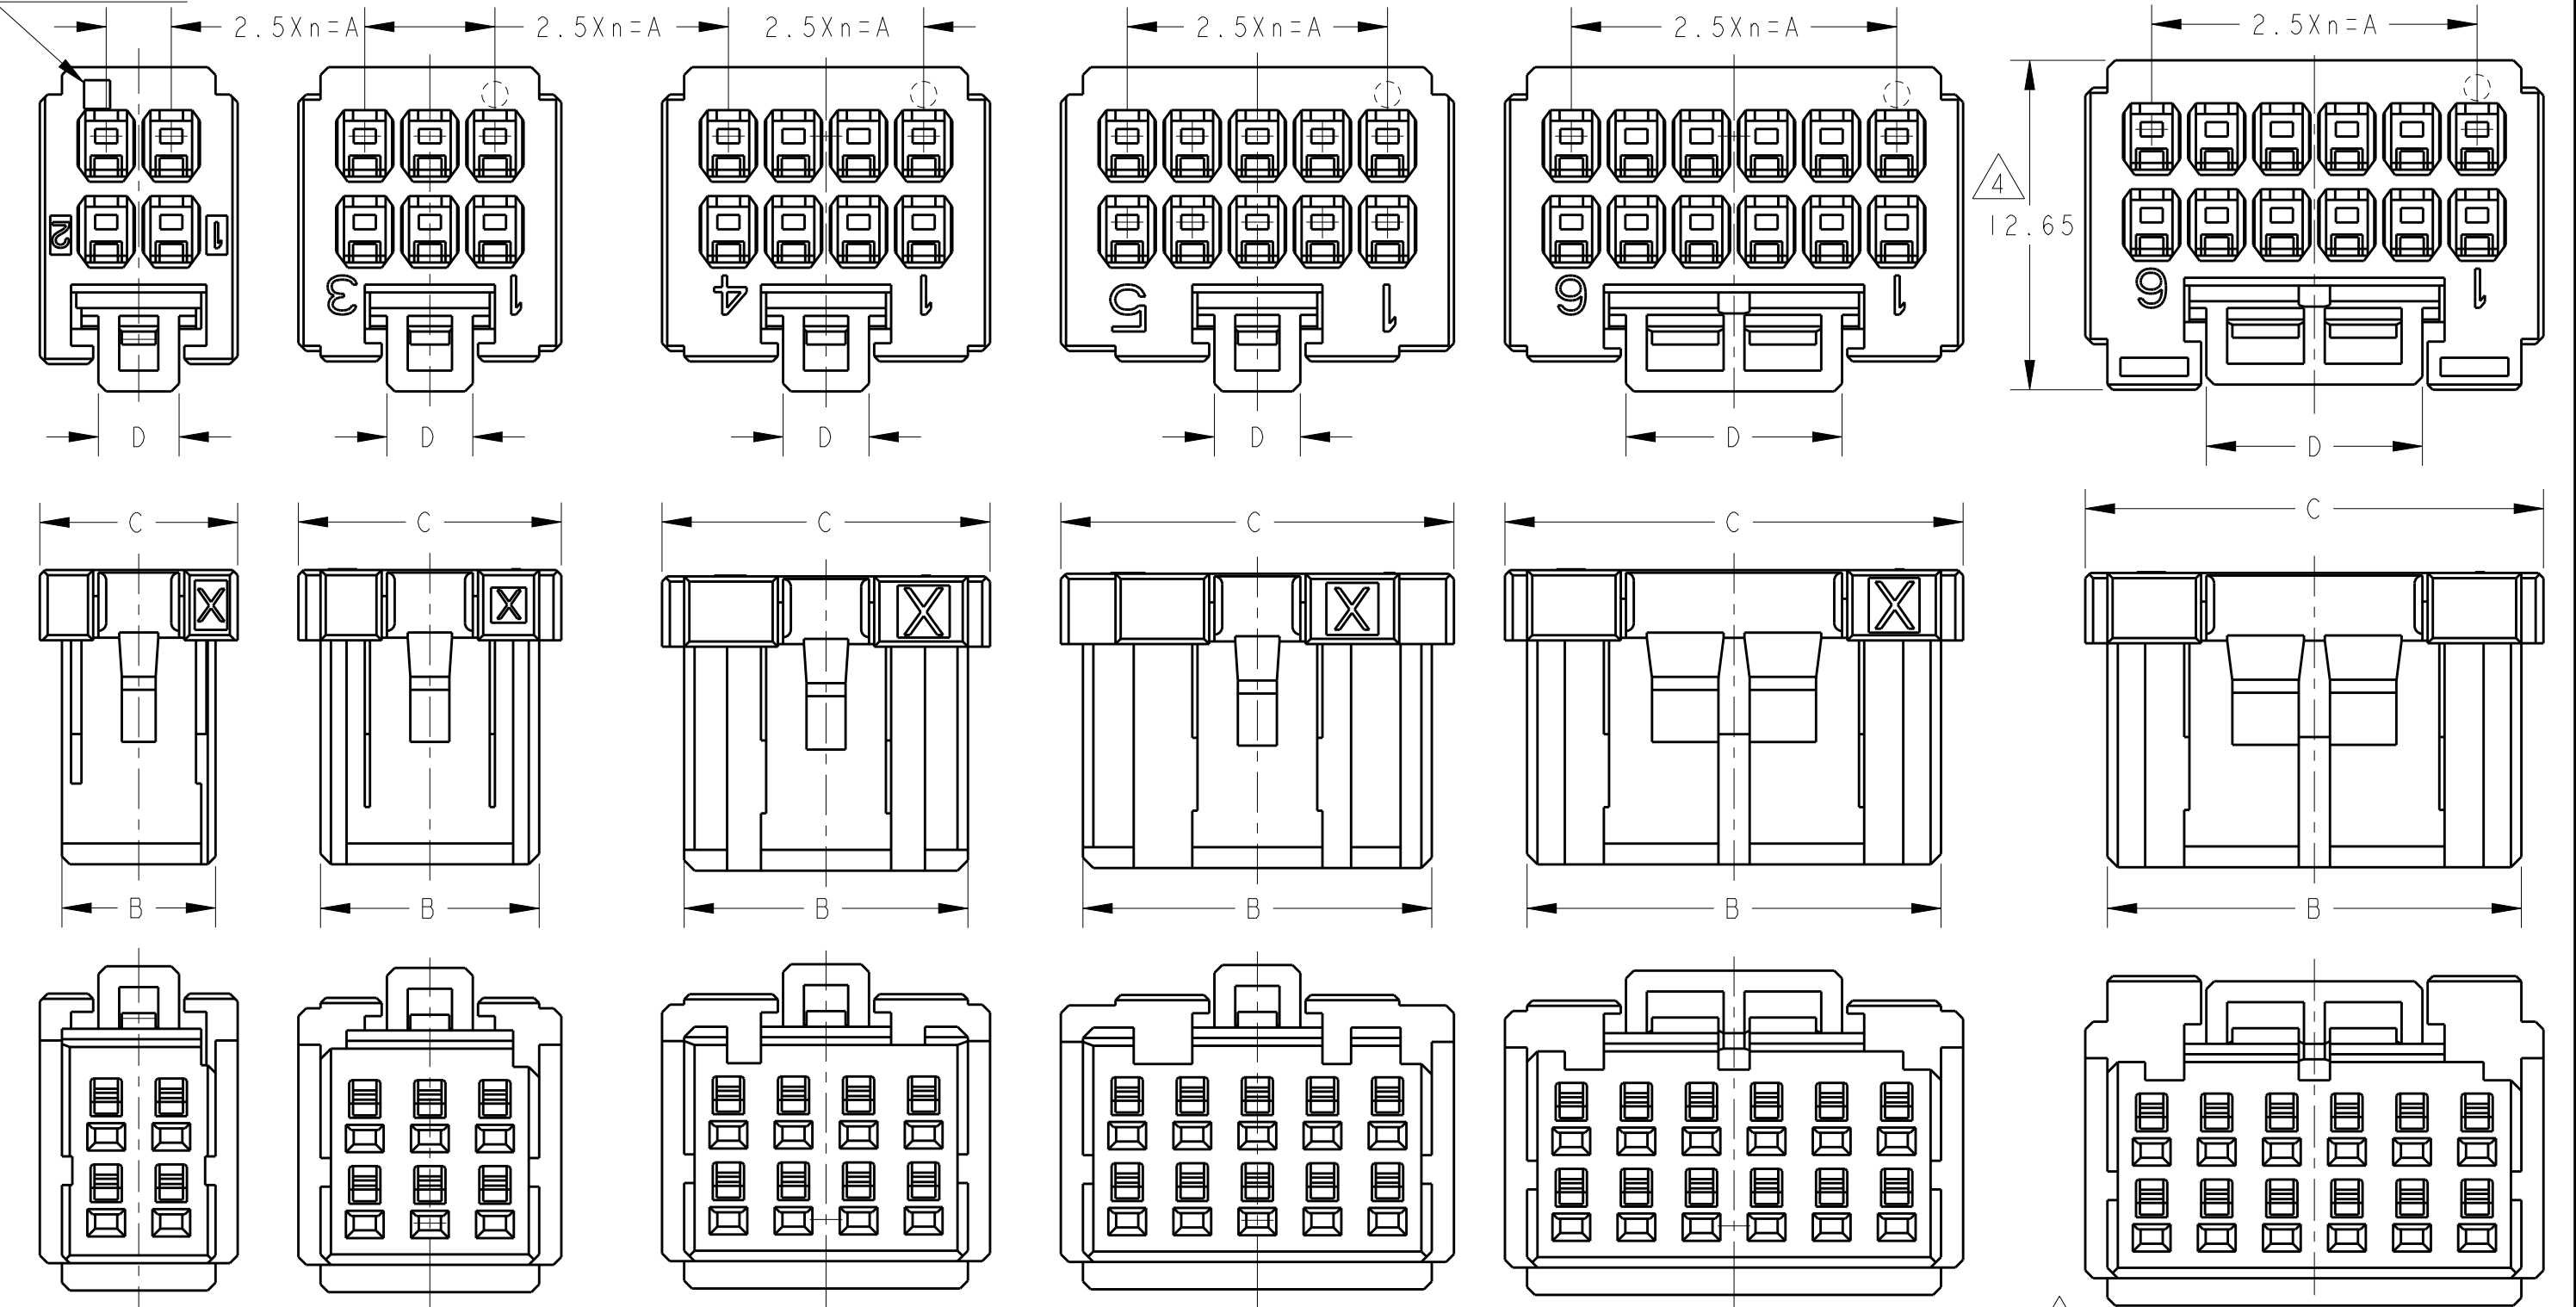

4POS(X-KEY)  
1-1827864-2

6POS(X-KEY)  
1-1827864-3


8POS(X-KEY)  
1-1827864-4

10POS(X-KEY): 1-1827864-5 12POS(X-KEY): 1-1827864-6

4 12POS(X-KEY): 9-1827864-6

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:  
単位: 耗  
mm



MATERIAL  
材料

TOLERANCES UNLESS  
OTHERWISE SPECIFIED:

一般公差  
0 PLC ±  
1 PLC ±  
2 PLC ±  
3 PLC ±  
4 PLC ±  
ANGLES ±

FINISH  
仕上

DWN 23AUG2005

CHK T.KUDO

D.MITSUGI 23AUG2005

APVD D.MITSUGI

PRODUCT SPEC

製品規格

108-78268,78298

APPLICATION SPEC

取付適用規格

114-5377

WEIGHT

CUSTOMER DRAWING



TE Connectivity

NAME  
名称 DYNAMIC DI200D 2.5mm PITCH  
REC HSG  
4-20 POS

SIZE

CAGE CODE

DRAWING NO

番号  
C-1827864

RESTRICTED TO

SCALE  
尺度 4:1

SHEET  
2 OF 4

REV  
E

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT -

ALL RIGHTS RESERVED.

LOC  
J

DIST

REVISIONS  
変更

P

LTR

DESCRIPTION

DATE

DWN





APVD

SEE SHEET 1




-

-

-

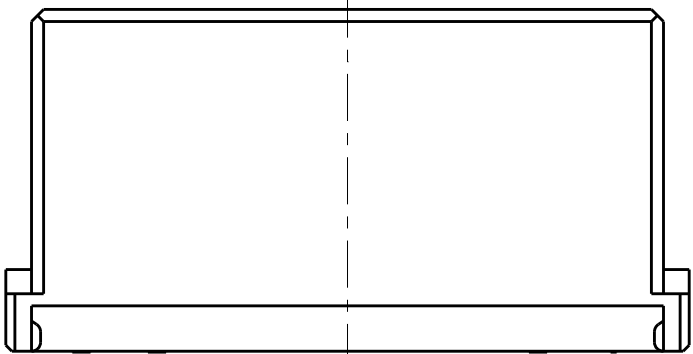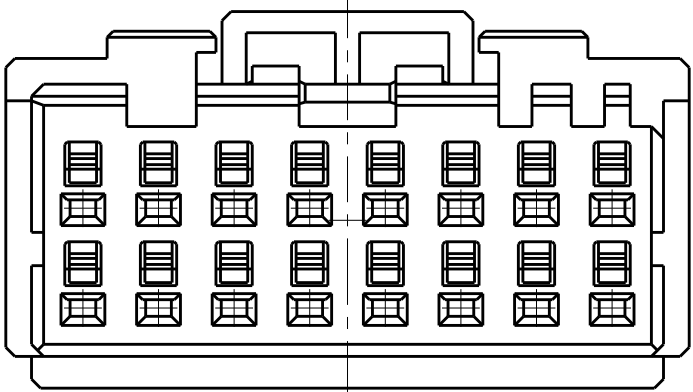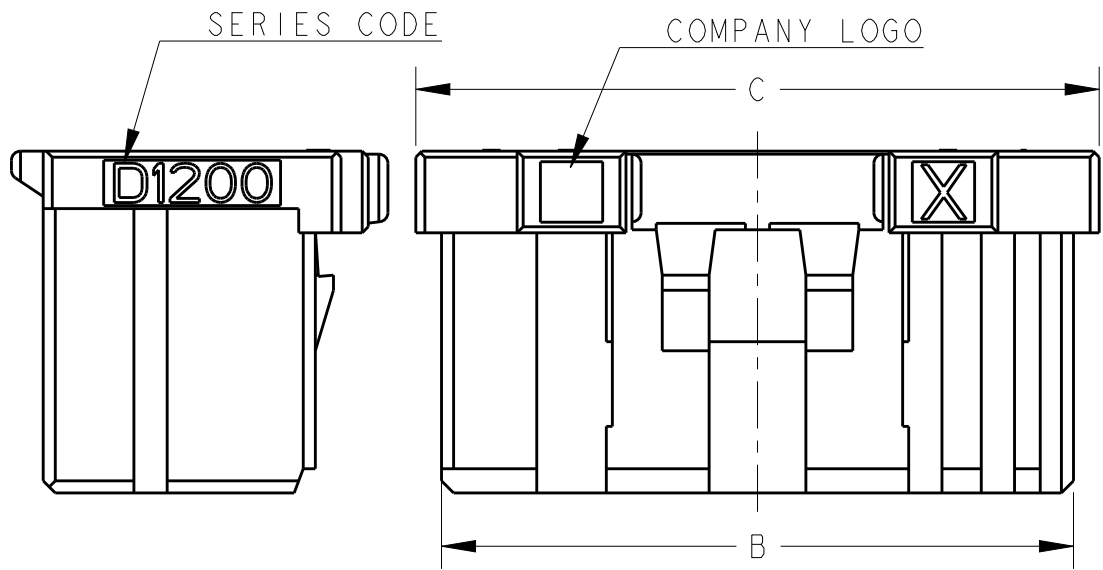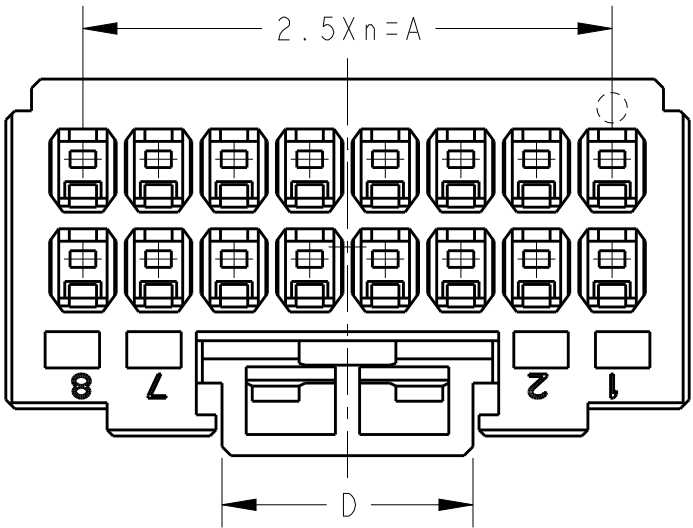


16POS(X-KEY): 1-1827864-8

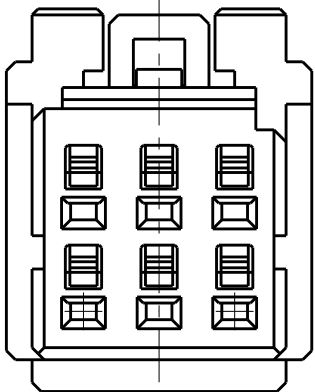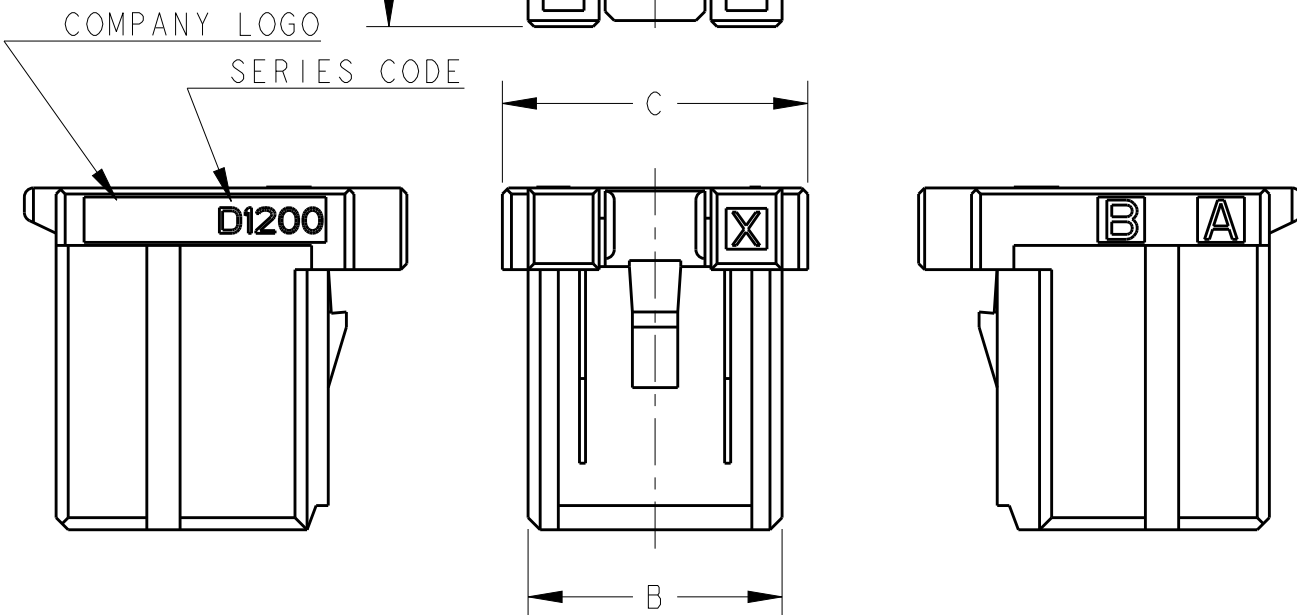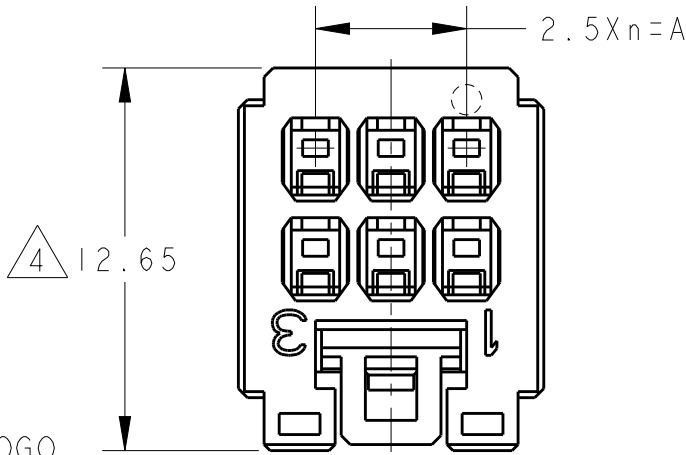

6POS(X-KEY): 9-1827864-3

|                                        |  |                                          |           |                                                                                                       |                 |
|----------------------------------------|--|------------------------------------------|-----------|-------------------------------------------------------------------------------------------------------|-----------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. |  | DWN<br>T. KUDO                           | 23AUG2005 |  TE Connectivity |                 |
|                                        |  | CHK<br>D. MITSUGI                        | 23AUG2005 |                                                                                                       |                 |
|                                        |  | APVD<br>D. MITSUGI                       | 23AUG2005 | NAME<br>名称<br>DYNAMIC DI200D 2.5mm PITCH<br>REC HSG<br>4-20 POS                                       |                 |
|                                        |  | PRODUCT SPEC<br>製品規格<br>108-78268, 78298 |           |                                                                                                       |                 |
|                                        |  | APPLICATION SPEC<br>取付適用規格<br>114-5377   |           | SIZE<br>A3                                                                                            |                 |
|                                        |  | WEIGHT                                   |           |                                                                                                       |                 |
|                                        |  | CUSTOMER DRAWING                         |           | SCALE<br>尺度<br>4:1                                                                                    | SHEET<br>3 OF 4 |
|                                        |  |                                          |           | REV<br>E                                                                                              |                 |

|                                                                                       |  |                                           |   |
|---------------------------------------------------------------------------------------|--|-------------------------------------------|---|
| DIMENSIONS:<br>単位: 耗<br>mm                                                            |  | TOLERANCES UNLESS<br>OTHERWISE SPECIFIED: |   |
|  |  | 一般公差                                      |   |
|                                                                                       |  | 0 PLC                                     | ± |
|                                                                                       |  | 1 PLC                                     | ± |
|                                                                                       |  | 2 PLC                                     | ± |
|                                                                                       |  | 3 PLC                                     | ± |
|                                                                                       |  | 4 PLC                                     | ± |
|                                                                                       |  | ANGLES                                    | ± |
|                                                                                       |  | FINISH<br>仕上                              |   |

|                  |           |
|------------------|-----------|
| APVD             | 23AUG2005 |
| PRODUCT SPEC     | 製品規格      |
| APPLICATION SPEC | 取付適用規格    |
| WEIGHT           |           |

|               |         |                                                   |
|---------------|---------|---------------------------------------------------|
| NAME          | 名称      | DYNAMIC DI200D 2.5mm PITCH<br>REC HSG<br>4-20 POS |
| SIZE          | A3      |                                                   |
| CAGE CODE     | 00779   |                                                   |
| DRAWING NO    | 1827864 |                                                   |
| RESTRICTED TO |         |                                                   |

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT -

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

変更

P

LTR

DESCRIPTION

DATE

DWN

APVD

-

SEE SHEET 1

-

-

-

4 12.65

A

COMPANY LOGO

SERIES CODE

D1200

C

B


D

B

A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:  
単位: 耗  
mm



TOLERANCES UNLESS  
OTHERWISE SPECIFIED:

一般公差  
0 PLC ±  
1 PLC ±  
2 PLC ±  
3 PLC ±  
4 PLC ±  
ANGLES ±

MATERIAL  
材料

FINISH  
仕上

DWN 23AUG2005

T. KUDO

CHK 23AUG2005

D. MITSUGI

APVD 23AUG2005

D. MITSUGI

PRODUCT SPEC

製品規格

108-78268, 78298

APPLICATION SPEC

取付適用規格

114-5377

WEIGHT

CUSTOMER DRAWING



TE Connectivity

NAME  
名称 DYNAMIC DI200D 2.5mm PITCH  
REC HSG  
4-20 POS

SIZE

CAGE CODE

DRAWING NO

番号

RESTRICTED TO

A3

00779

C

1827864

SCALE

尺度

4:1

SHEET

4

OF

4

REV

E

4 4POS(X-KEY): 9-1827864-2

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-1827864-2](#)