


Sep.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

【 Assemble tool 】 For outer conductor crimping : HT303/HRM-T-4(58A/U hole)

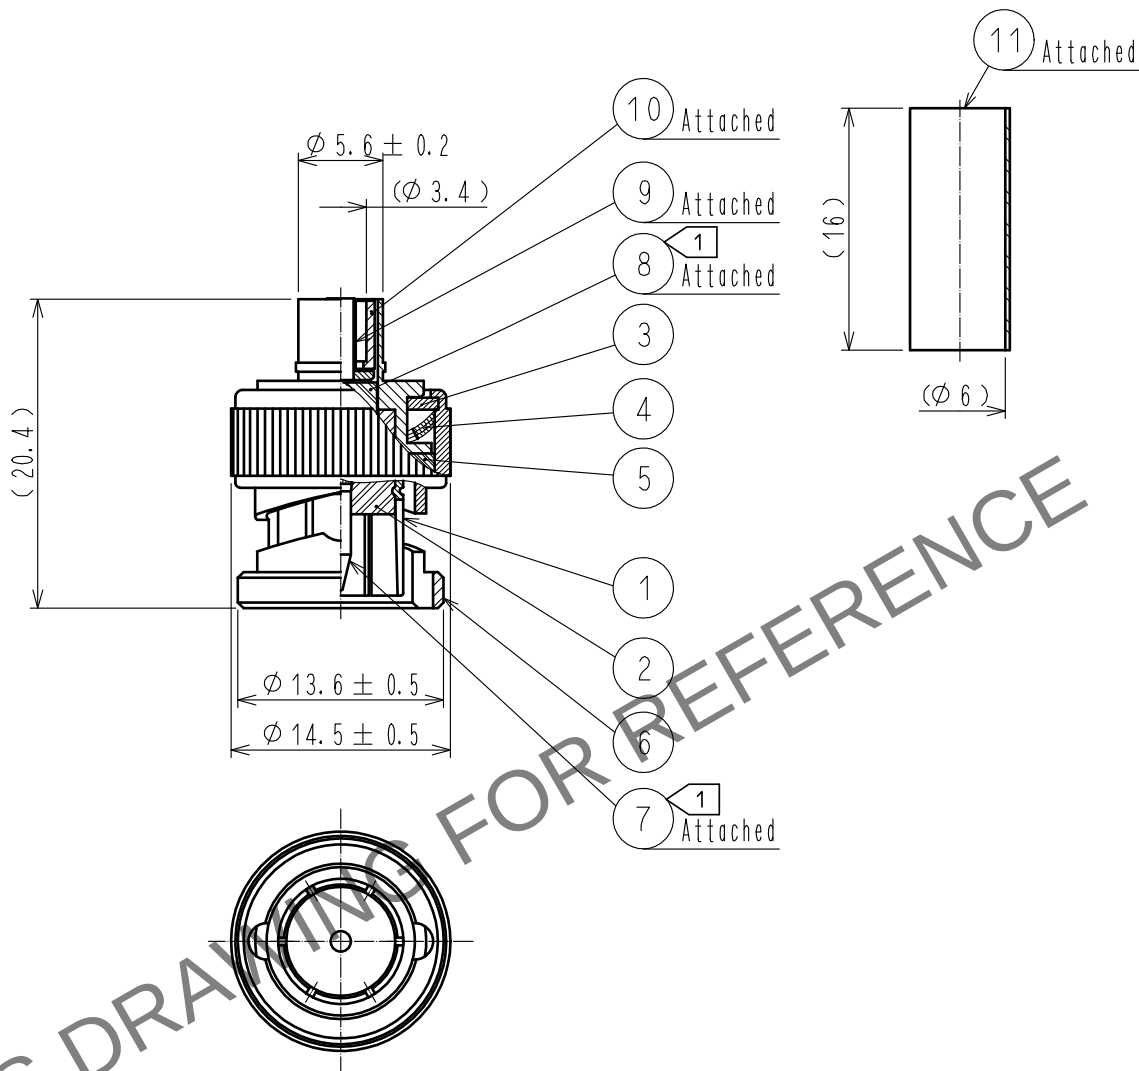

Note 1 Part 7 and 8 will be attached in a sub assembled state.

6	BRASS	NICKEL PLATING							
5	SILICONE RUBBER		11	POLYOLEFIN	HEAT SHRINK TUBING(BLACK)				
4	BERYLLIUM COPPER	SILVER PLATING	10	BRASS	NICKEL PLATING				
3	BRASS	NICKEL PLATING	9	BRASS	NICKEL PLATING				
2	PTFE		8	PTFE					
1	BRASS	NICKEL PLATING	7	BRASS	GOLD PLATING				
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS				
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE		
HIROSE ELECTRIC CO., LTD.		APPROVED : KY. SHIMIZU	20191121	DRAWING NO.	EDC-305440-00-00				
		CHECKED : KY. SHIMIZU	20191121	PART NO.	BNC<75>-P-1.5CV				
		DESIGNED : RO. YOKOYAMA	20191121	CODE NO.	CL302-0404-7-00				
		DRAWN : ST. KISHI	20191121						