

NOTES



- 指定なき寸法公差/Unless otherwise specified, tolerance shall be
0~10未満/Less than 10 ± 0.2
10以上/10 or more ± 0.3
- #615-3仕上/Finish
ニッケルめっき下地/Under plating Nickel
接触部/金めっき仕上/Contact area/Gold plating(0.1 μ m以上/or more)
圧着部/銅めっき仕上/Crimp area/Tin plating(1.0 μ m以上/or more)
- 品名/Part name

#615-3


—コンタクト長さ:標準より1mm長い/Contact length:1mm longer than Standard
—適合ケーブルサイズ/Applicable cable size
—AWG24(ケーブル被覆外径 ϕ 1.08~1.14)
—AWG24(Insulation Dia. ϕ 1.08~1.14)
—FAS12用圧着コンタクト/Crimp contact for FAS12

- アッセンブリツール/Assembly tools


圧着アプリータ/Crimping applicator	圧着ハンドツール
日本オートマチックマシン(株)/Japan Automatic Machine Co., Ltd.	Crimping hand tool
EFS876600K	CH-11

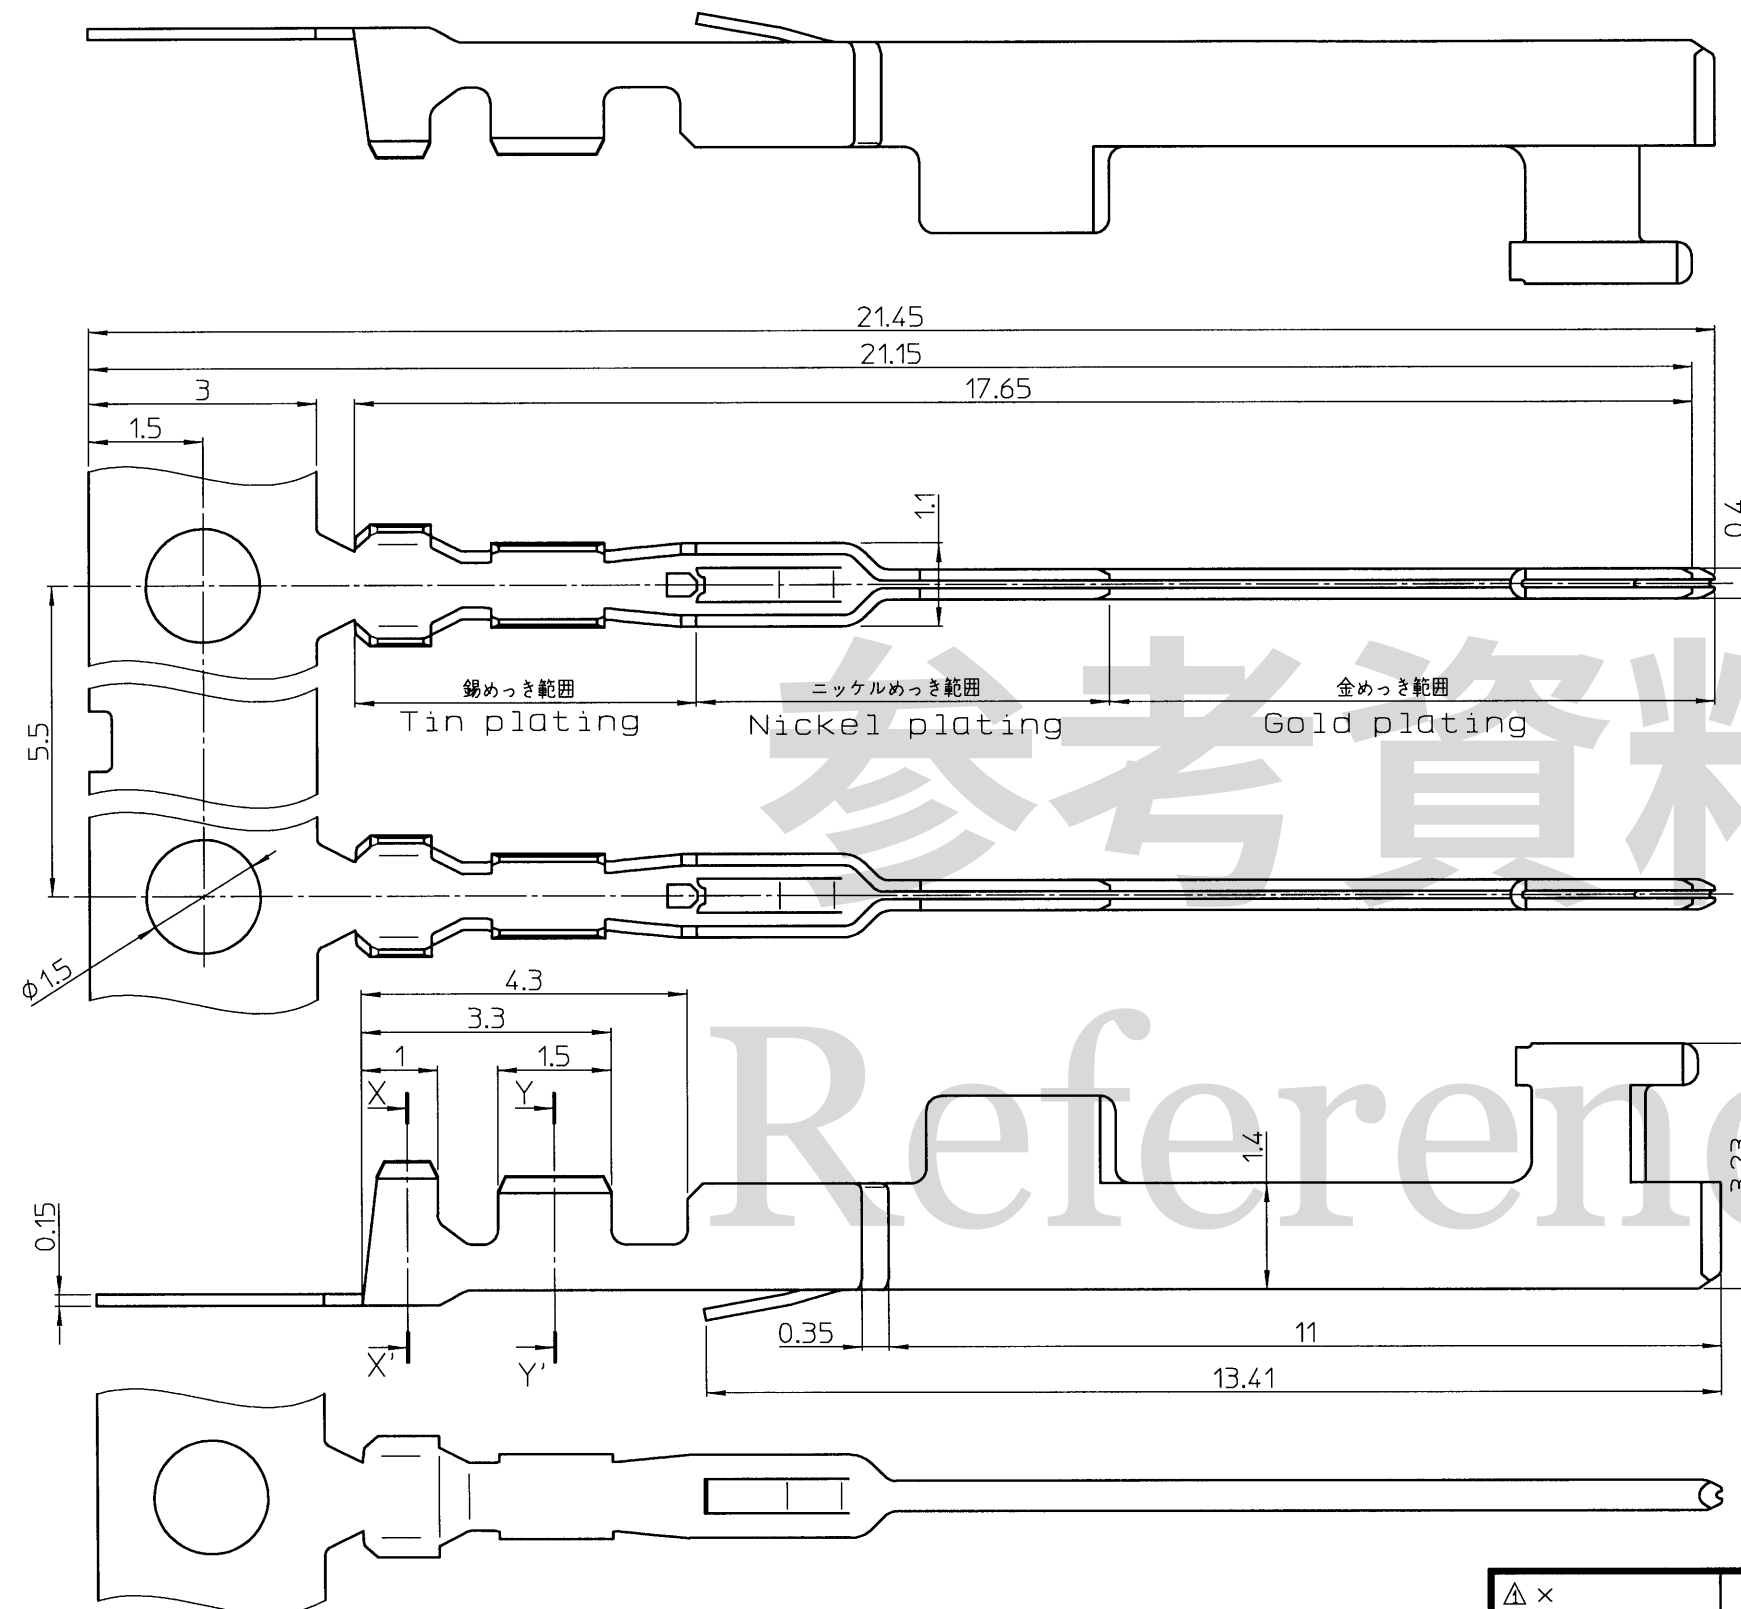

X-X'断面/Cross-section



Y-Y'断面/Cross-section

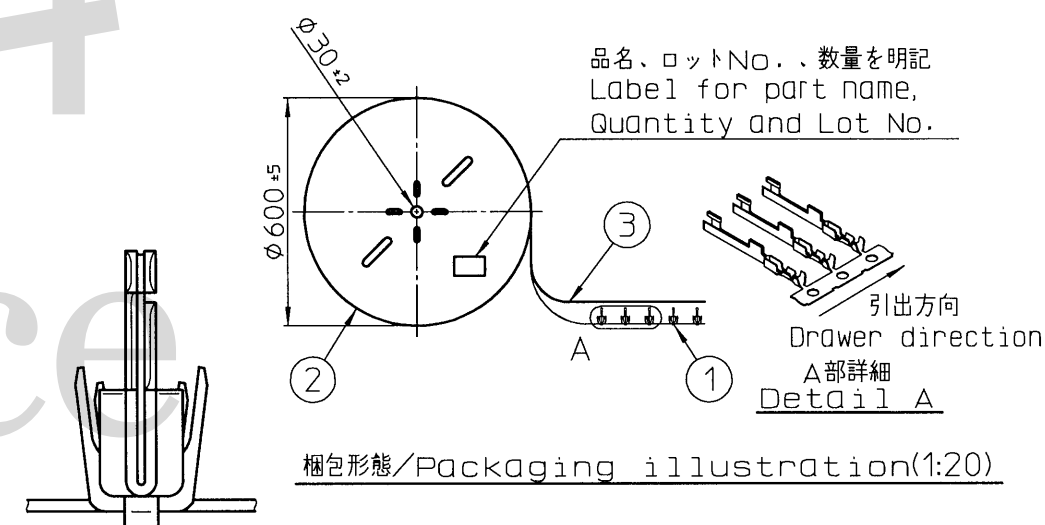

梱包形態/Packaging illustration(1:20)

③	層間紙 Sandwich Paper between layers of contact	1	紙 Paper	
②	リール Reel	1	紙 Paper	
①	#615-3	5,000	銅合金 Copper alloy	SEE NOTE2
No.	品名 Part name	数量 Quantity	材質 Material	仕上 Finish

△ ×					ニッケルめっき範囲、背面図、断面追加、AWG24ケーブル被覆外径範囲拡大の為、改版。 Add Nickel plating and Rear view, Cross-section, expanded range of Insulation Dia(AWG24)				
Jan.29,2021		<i>n. Sugita</i>	S.Takao	Y.Aoki					
REV. DATE		APPROVED BY	CHECKED BY	DRAWN BY	DESCRIPTION				
THIRD ANGLE PROJECTION		DRAWN BY	DATE	CHECKED BY	DATE	APPROVED BY	DATE	SCALE	UNIT
		A.Yajima	Oct.04,2016	S.Takao	Oct.04,2016	N.Sugita	Oct.04,2016	10:1	mm
MATERIAL		TITLE			KEL CORPORATION				
FINISH					DRAWING No. P3D432 REVISION 3				