


対向 (Y 方向) 方向許容公差 $\pm 0.5 \text{ MAX.}$
a permissible mounting
tolerance on opposite
direction.
(Y-direction)

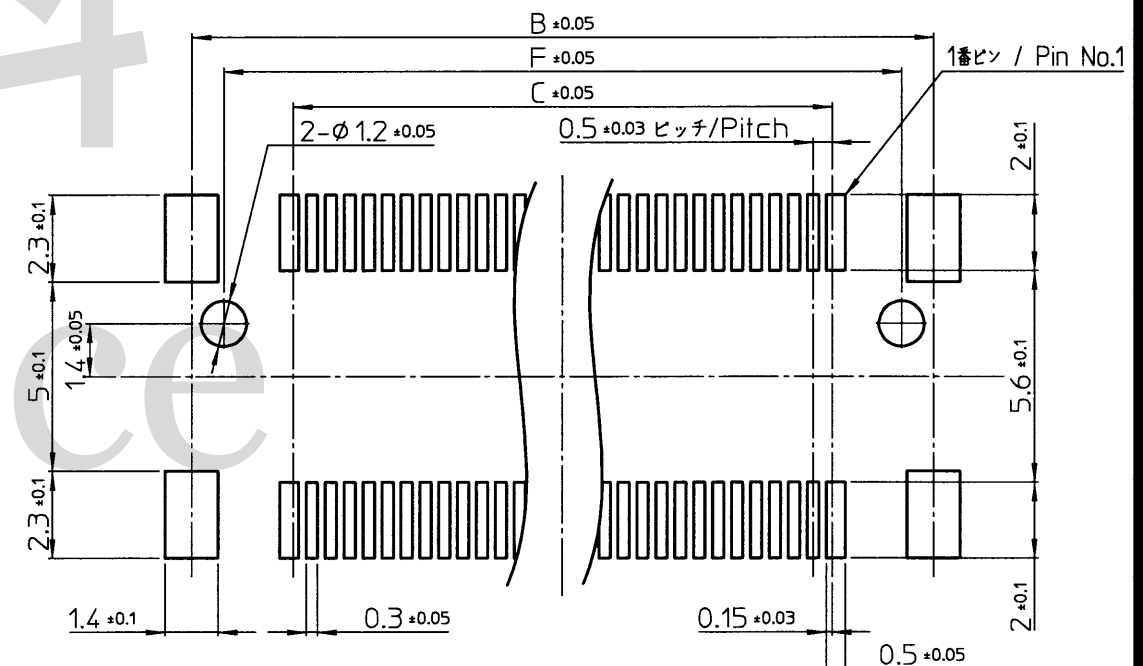

⑤	防塵テープ /Dust-proof tape	1	ポリイミド/Polyimide	t=0.08 茶褐色/Brown
④	固定金具 /Retention clip	2	銅合金/Copper alloy	ニッケルメッキ下地 Au0.05μm 以上 /Under plating Nickel, Au0.05μm or more
③	インシュレータB /InsulatorB	1	LCP(UL94V-0)黒 ガラス繊維入り Glass-filled L.C.P.(UL94V-0),Black	_____
②	インシュレータA /InsulatorA	1	LCP(UL94V-0)黒 ガラス繊維入り Glass-filled L.C.P.(UL94V-0),Black	_____
①	コンタクト /Contact	極数 /No.of contact	銅合金/Copper alloy	ニッケルメッキ下地 Au0.25μm以上(接触部), Au0.05μm以上(テール部) Under plating Nickel, Au0.25μm or more(Contact area), Au0.05μm or more(Tail area)
No.	品名 /Part name	数量 /Quantity	材質/Material	仕上げ/Finish

△ ×				
△ ×				
△ ×				
May 27, 2019	M. Kozumai	Y. Sato	M. Kobayashi	90 極を削除。 / Deleted DY0□-090S-□T.
REV. DATE	APPROVED BY	CHECKED BY	DRAWN BY	DESCRIPTION
THIRD ANGLE PROJECTION	DRAWN BY M. Kobayashi	DATE May 30, 2007	CHECKED BY M. Suzuki	DATE May 30, 2007
			APPROVED BY E. Doi	DATE May 30, 2007
			SCALE 5:1	UNIT mm
MATERIAL	TITLE			KEL CORPORATION
FINISH	DY0□-□□□S-□T			DRAWING No. P3A449
				REVISION 7