

P3A946



ON

No.	品名 Part name	数量 Quantity	材質 Material	仕上 Finish
①	インシュレータ Insulator	1	PBT ガラス繊維入り UL94V-0 色:SEE NOTE3 Glass-filled PBT UL94V-0 Color:SEE NOTE3	
②	コンタクト Contact	極数 No. of contacts	銅合金 Copper alloy	SEE NOTE2



E	D	C	B	A	極数 No. of contacts
2.5	12.8	16.2	23.6	29.8	4
5.0	15.3	18.7	26.1	32.3	6
7.5	17.8	21.2	28.6	34.8	8
10.0	20.3	23.7	31.1	37.3	10
12.5	22.8	26.2	33.6	39.8	12
15.0	25.3	28.7	36.1	42.3	14
17.5	27.8	31.2	38.6	44.8	16
20.0	30.3	33.7	41.1	47.3	18
22.5	32.8	36.2	43.6	49.8	20
25.0	35.3	38.7	46.1	52.3	22
27.5	37.8	41.2	48.6	54.8	24
30.0	40.3	43.7	51.1	57.3	26
32.5	42.8	46.2	53.6	59.8	28
35.0	45.3	48.7	56.1	62.3	30
37.5	47.8	51.2	58.6	64.8	32
40.0	50.3	53.7	61.1	67.3	34
47.5	57.8	61.2	68.6	74.8	40

- NOTES
- 指定なき寸法公差
Unless otherwise specified, tolerance shall be
0~10未満 ± 0.2 / Less than 10 ± 0.2
10~50未満 ± 0.25 / 10 to Less than 50 ± 0.25
50以上 ± 0.3 / 50 or more ± 0.3
 - コンタクトめっき仕上/Contact finish
ニッケルめっき下地/Under plating Nickel
接触部/金めっき(0.05 μ m以上)
Contact area/Gold plating(0.05 μ m or more)
テール部/金めっき(0.03 μ m以上)
Tail area/Gold plating(0.03 μ m or more)
 - 品名/Part name
FA11-□□□-□
インシュレータ色/Insulator color
無:黒色/None:Black
3:グレー(20極のみ)/3:Gray(20pin)
極数/Number of contacts
シリーズ名/Series name
 - 参考基板厚/Reference P.W.B. thickness
 $t=1.6$


製造国名/Producing country
(刻印サイズ/Size:1.5X4)

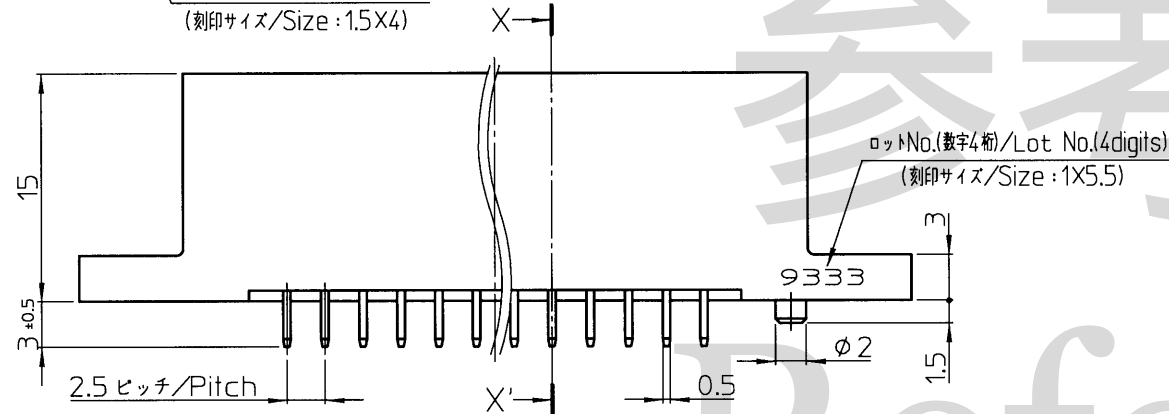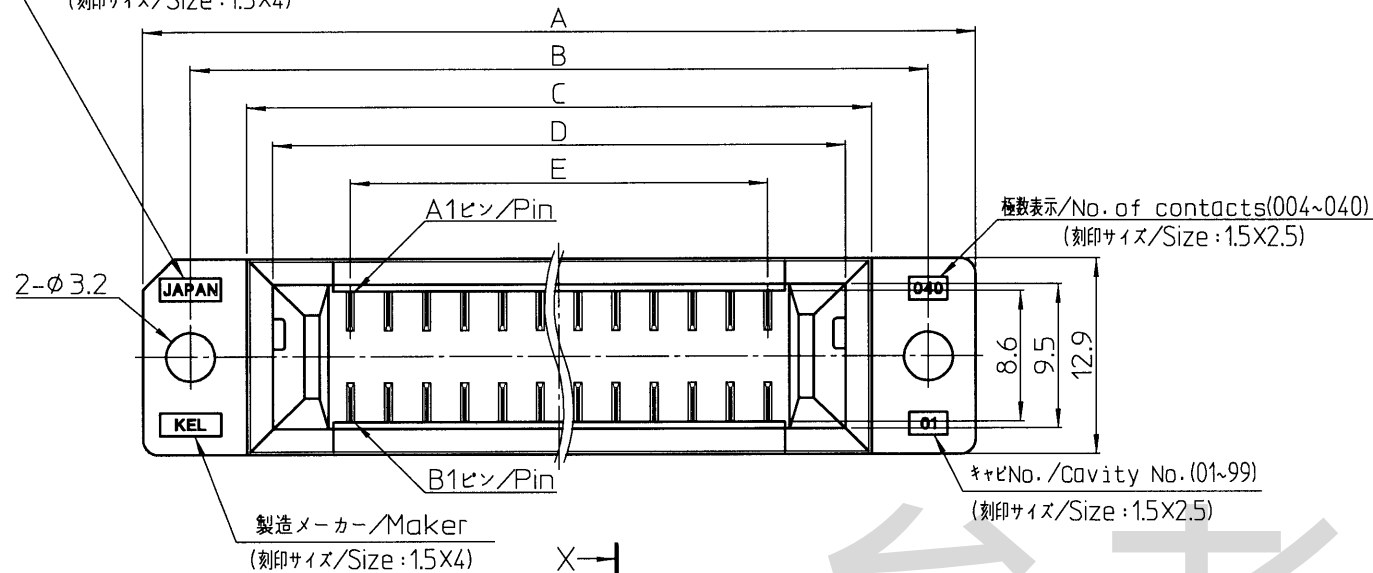

列表示/B row side
(刻印サイズ/Size:1.5X1.5)

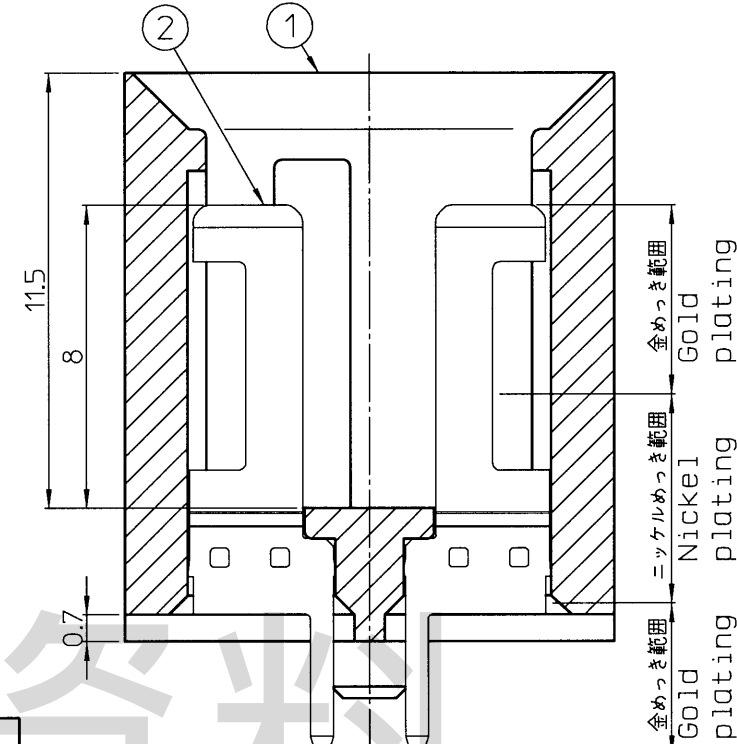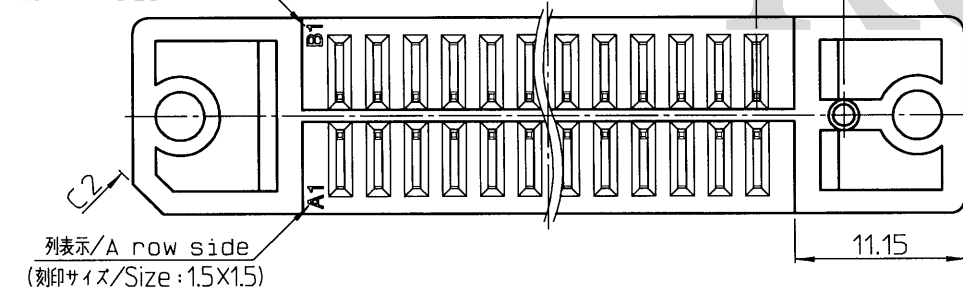

X-X'断面/Cross-section(5:1)

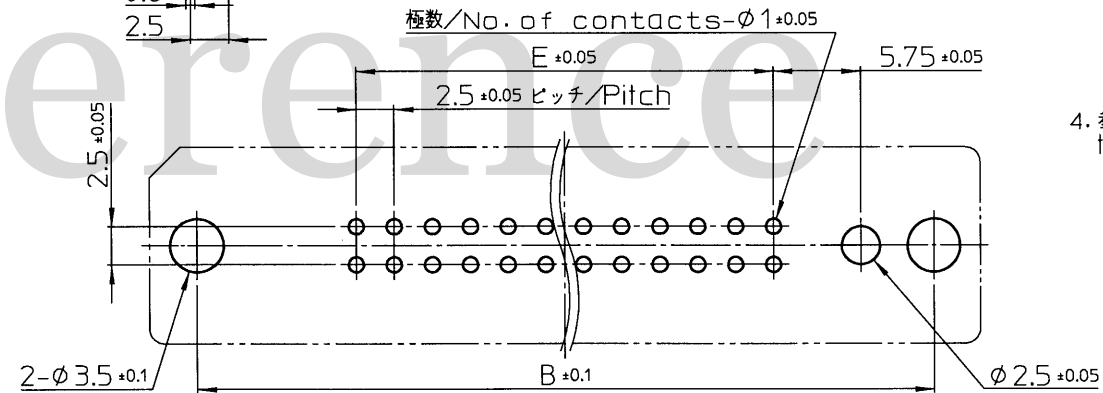

参考基板設計要領(コネクタ搭載面)
A reference drawing of P.W.B.(connector mounting side)

△×				
△×				
Jul.26,2021	N. Sugita	S. Takao	K. Hamada	誤記訂正及び参考基板厚追加の改訂./Corrected error and added Reference P.W.B. thickness.
REV. DATE	APPROVED BY	CHECKED BY	DRAWN BY	DESCRIPTION
THIRD ANGLE PROJECTION	DRAWN BY N. Sugita	DATE Jul.27,2009	CHECKED BY K. Tagai	DATE Jul.27,2009
MATERIAL	TITLE			
FINISH	FA 1 1 - □ □ □ - □			
KEL CORPORATION				DRAWING No.
P3A946				REVISION 4