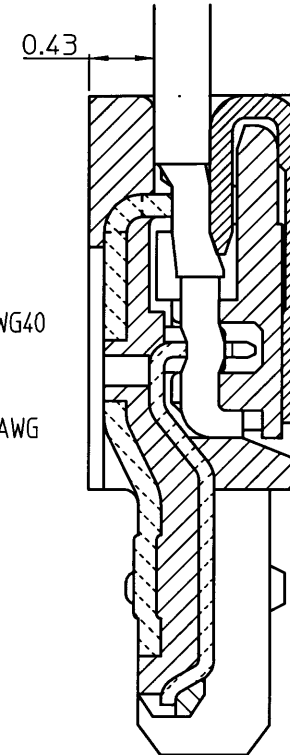


E	D	C	B	A	No. of contacts
9.9	4.5	10.1	7.5	11.5	10
14.9	9.5	15.1	12.5	16.5	20
19.9	14.5	20.1	17.5	21.5	30
24.9	19.5	25.1	22.5	26.5	40

With cable connection
圧接状態(20:1)

NOTES

1) Unless otherwise specified, tolerance shall be.
指定なき寸法公差

Less than 10 ±0.20 0 ~ 10 未満 ±0.20

10 ~ 50 ±0.25 10 ~ 50 未満 ±0.25

50 or more ±0.30 50 以上 ±0.30

2) Contact finish コンタクト仕上

Under plating Nickel

ニッケルメッキ下地

Gold plating (Au0.05μm or more) 金メッキ仕上(0.05μm以上)

3) Product family 製品構成

SSL20-□□SB

SSL20-□□SB Base

SSL20-□□CV2

4) This drawing is based on 10 pin contacts.

本図は10極で記載したものである。

5) Part Number 製品名

SSL 20 - □□ SB

Terminal style and Applicable cable

ターミナル形状及び適合ケーブル

SB : Straight Miniature coaxial cable AWG40

ストレートタイプ AWG40 (φ0.35) 極間同軸線対応

Maker : Hitachi Cable, Ltd.

Model No. : UL1354-S□(NN)1□40AWG

メーカー・型番 : 日立電線(株) UL1354-S□(NN)1□40AWG

Number of contacts 極数

10 : 10 pins

20 : 20 pins

30 : 30 pins

40 : 40 pins

Variation






20 : Plug Cable connection type

プラグ ケーブル接続タイプ


Series name シリーズ名

SSL series Miniature coaxial cable connector AWG40


SSL シリーズ AWG40 極間同軸線対応

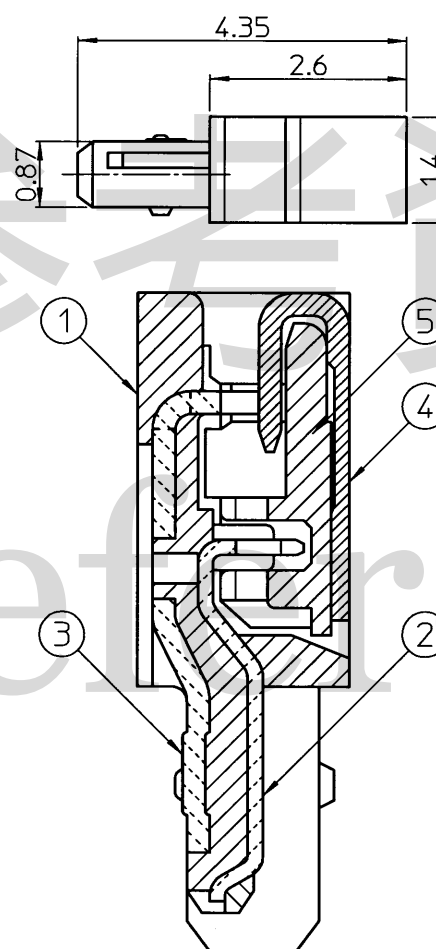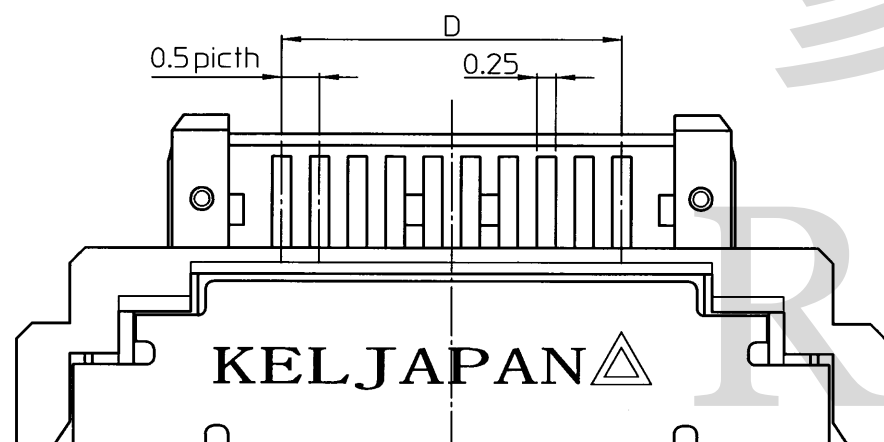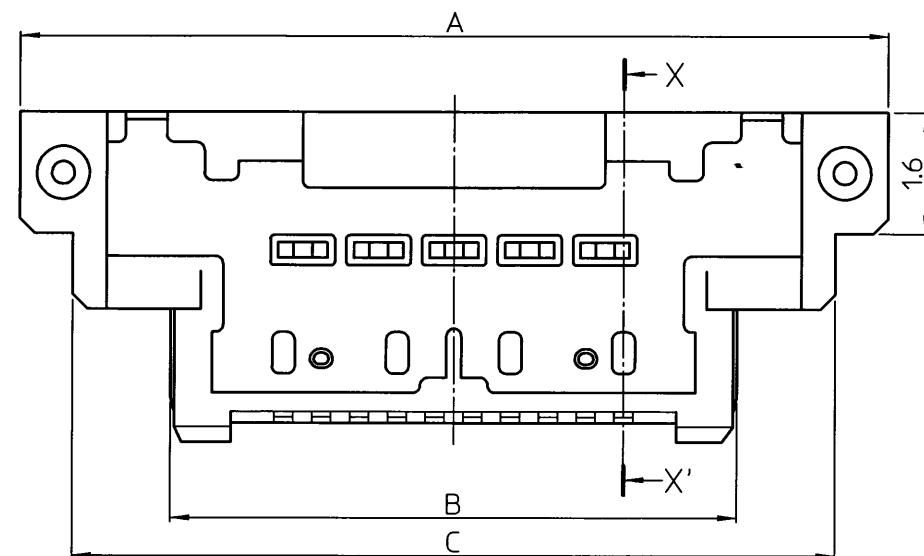

X-X' Cross-section(20:1)

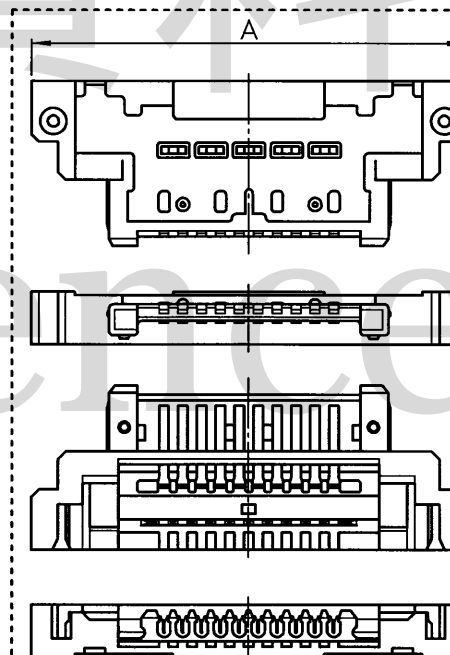

SSL20-□□SB Base(5:1)

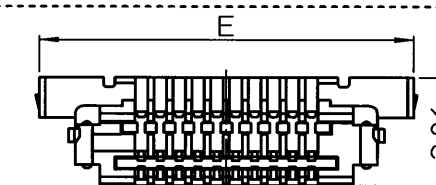

SSL20-□□CV2(5:1)



5	SSL20-□□CV2	IDC cover 圧接カバー	1	Glass-filled L.C.P(UL94V-0) Off White L.C.P(UL94V-0) Off White ガラス繊維入	
4		Metal shell P2 金属シェルP2	1	Copper alloy 銅合金	Tin copper 錫銅メッキ
3	SSL20-□□SB Base	Metal shell P1 金属シェルP1	1	Copper alloy 銅合金	Tin copper 錫銅メッキ
2		Contact コンタクト	No. of contacts 極数	Copper alloy 銅合金	SEE NOTE 2
1		Insulator インシュレータ	1	Glass-filled L.C.P(UL94V-0) Black L.C.P(UL94V-0)黒 ガラス繊維入	
No.	Part Number 製品名	Component 品名	Quantity 数量	Material 材料	Finish 仕上げ

△ ×				
△ ×				
△ ×				
△ ×				
REV. DATE	APPROVED BY	DRAWN BY	DESCRIPTION	
THIRD ANGLE PROJECTION	DRAWN BY T. Morikami	DATE Sep. 24, 2008	CHECKED BY N. Sugita	DATE Sep. 24, 2008
			APPROVED BY A. Shimada	DATE Sep. 24, 2008
			SCALE 10:1	UNIT mm
MATERIAL	TITLE		KEL CORPORATION	
FINISH	SSL20-□□SB SSL20-□□SB Base SSL20-□□CV2		DRAWING No. P3A798	
			REVISION 1	