







Aug.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

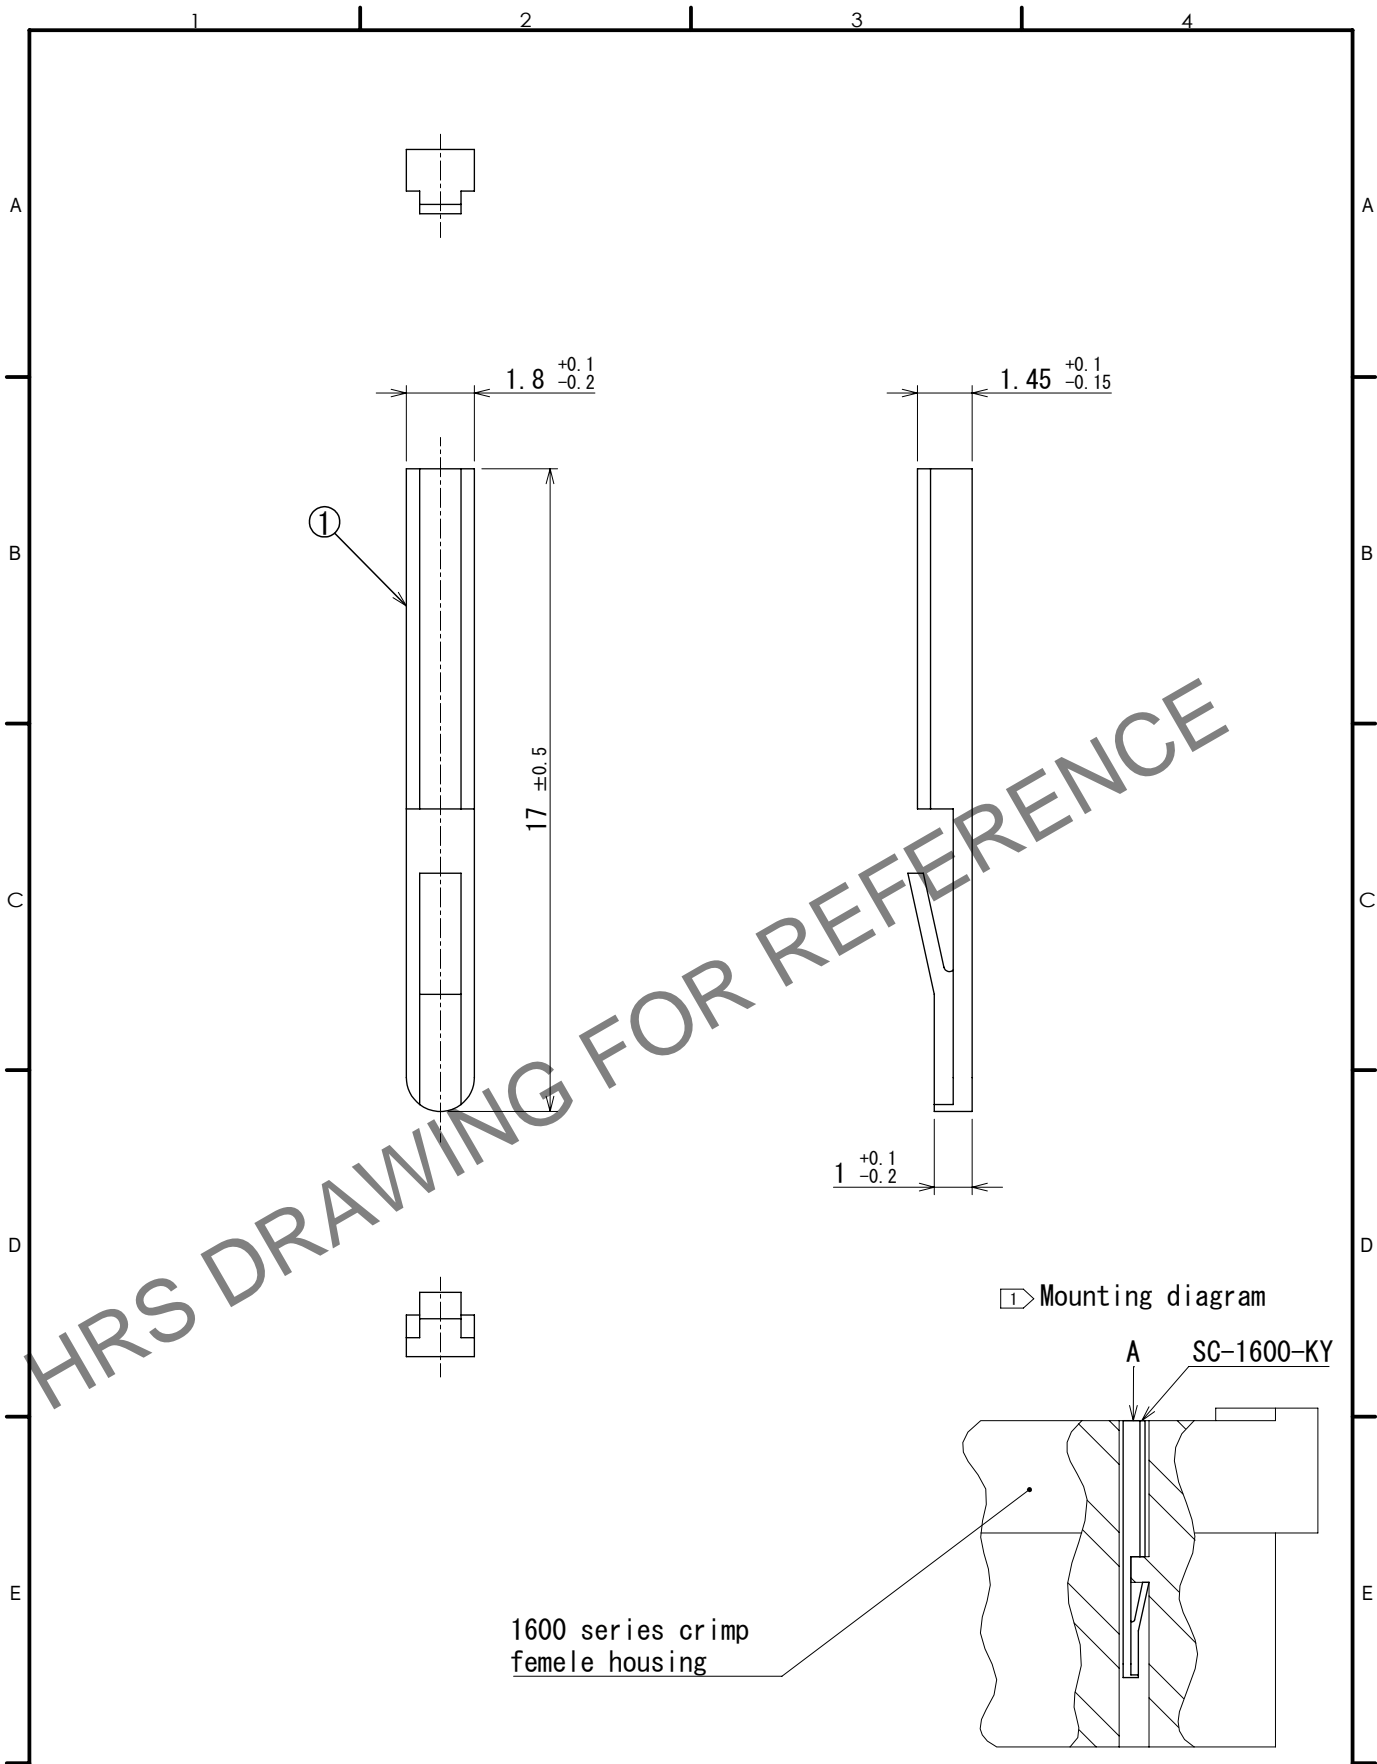

Note. ① Insert this product into the 1600 series crimp connector female housing(SC-16\*\*) from the mating side (direction A) to the state shown in the mounting diagram.

F	TOLERANCES SEE TABLE FOR SPECIFIED, UNLESS OTHERWISE			UNITS mm			COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE	F
	OVER	TO	TOLERANCE	SCALE	5:1							
	6		±0.3	ANGULAR	±1°	APPROVED : TU. TANIGUCHI 2023. 02. 16			DRAWING No. EDC-402755-00-00			
	6	18	±0.5		HIROSE ELECTRIC CO., LTD.	CHECKED : TU. TANIGUCHI 2023. 02. 16			PART No. SC-1600-KY			
	18	50	±0.7			DESIGNED : KG. OKITA 2023. 02. 16			CODE No. CL0216-0499-0-00			
	50	125	±1			DRAWN : KH. KOGI 2023. 02. 16			 1			
	ASSEMBLY DRAWING								 1			