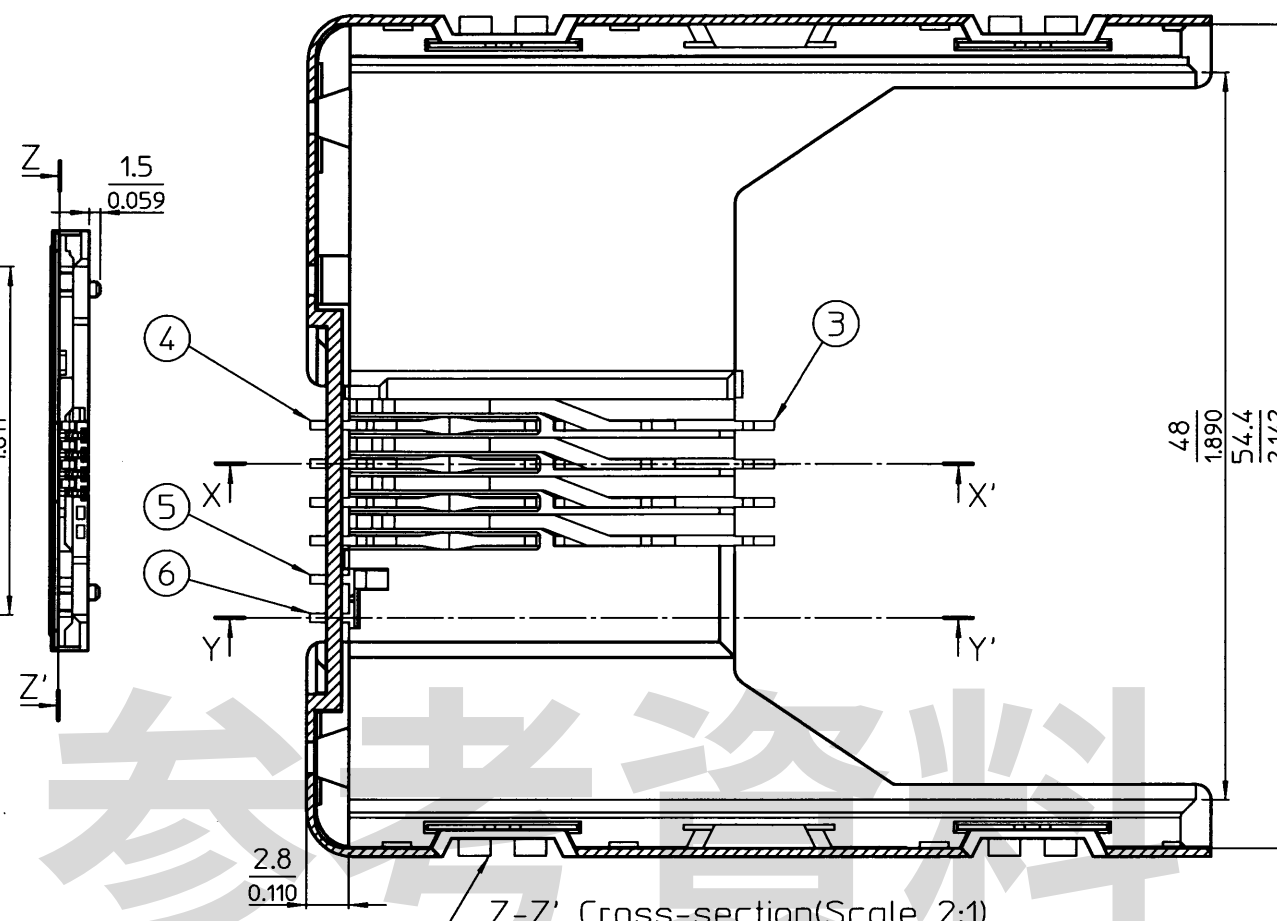
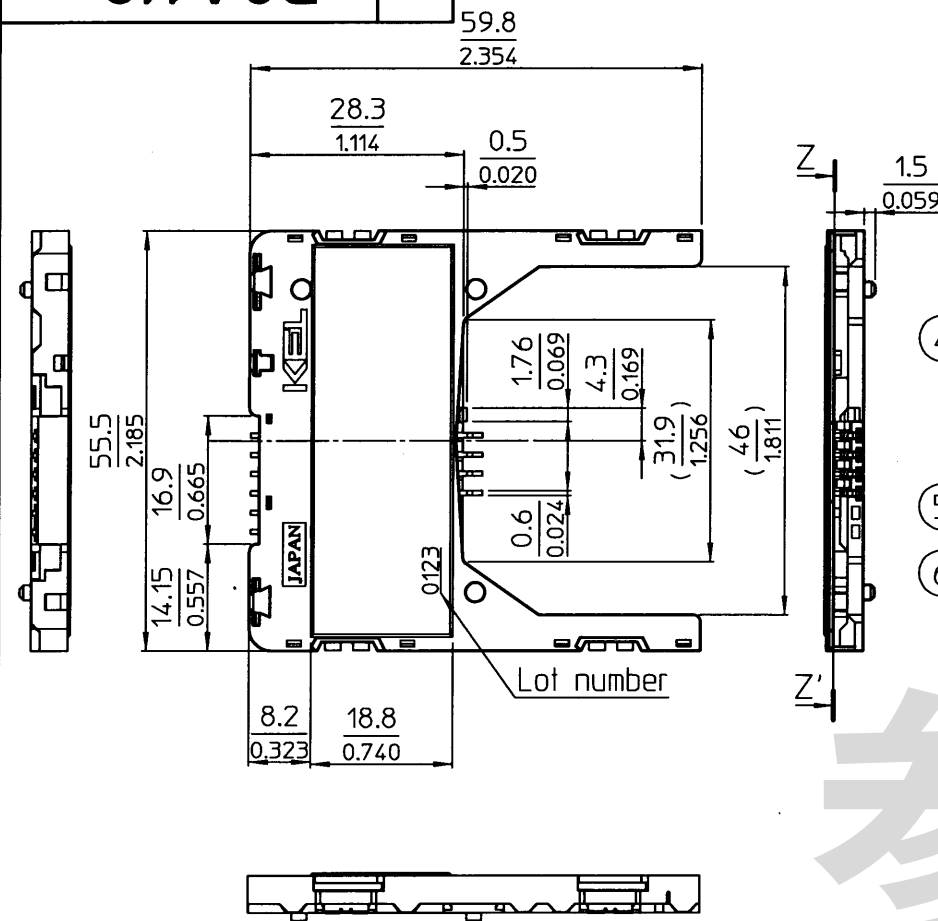





P3A110

No.

59.8
2.354

Notes

- 1) Dimensions are in millimeter.
- 2) Inch equivalents are in parenthesis or below the metric dimension.
- 3) Unless otherwise specified, tolerance shall be:
 Less than 10 ± 0.2 (Less than 0.394 ± 0.0079)
 10 ~ 50 ± 0.25 (0.394 ~ 1.969 ± 0.0098)
 50 or more ± 0.3 (1.969 or more ± 0.0118)
- 4) Contact finish.
 Under plating Nickel
 Contact area Gold
 Terminal area Gold
- 5) Applicable IC card
 Semistandard ISO/IEC7816
- 6) A reference drawing of P. W. B.

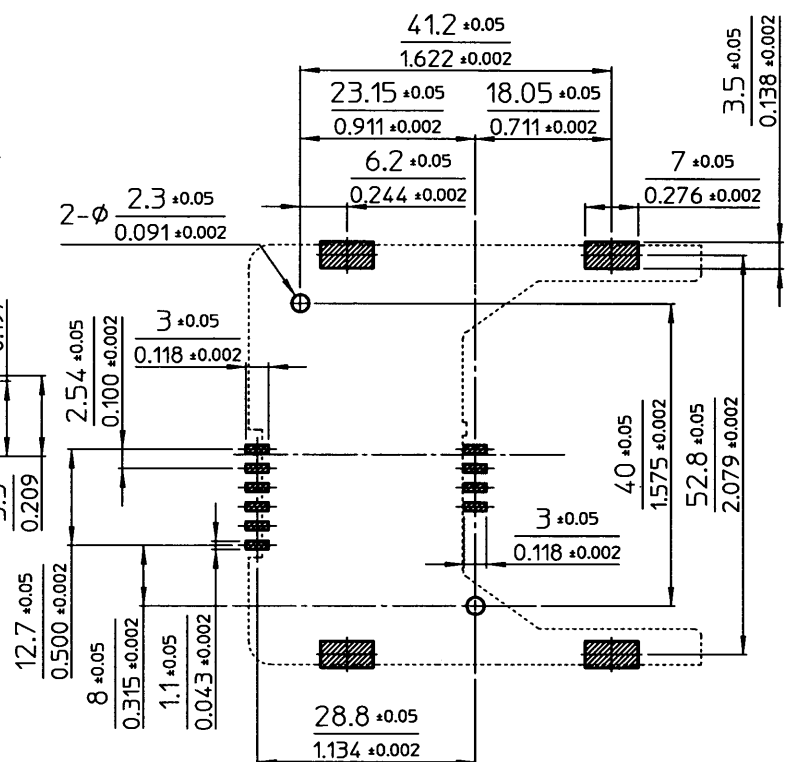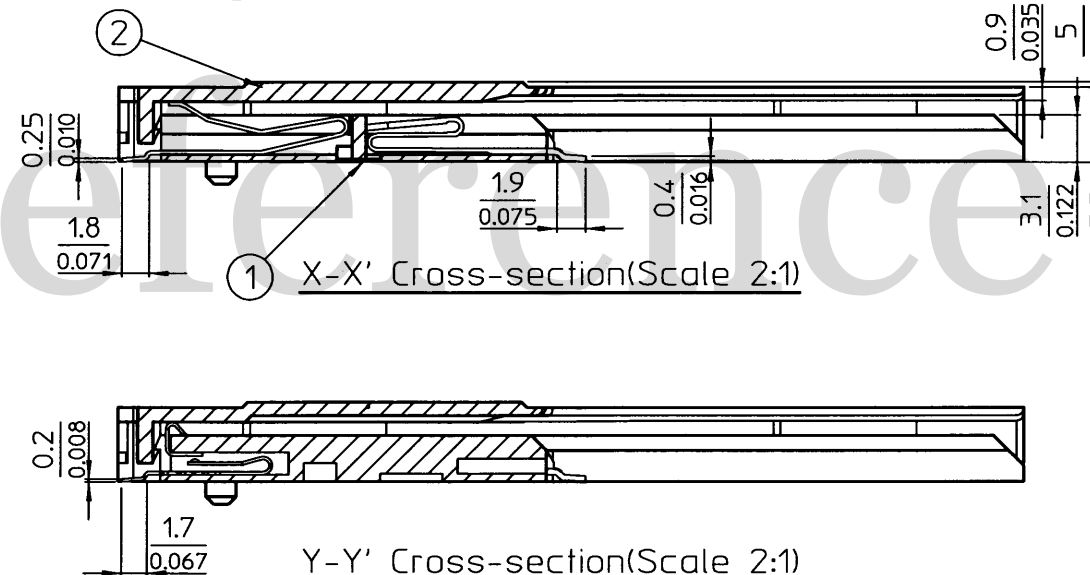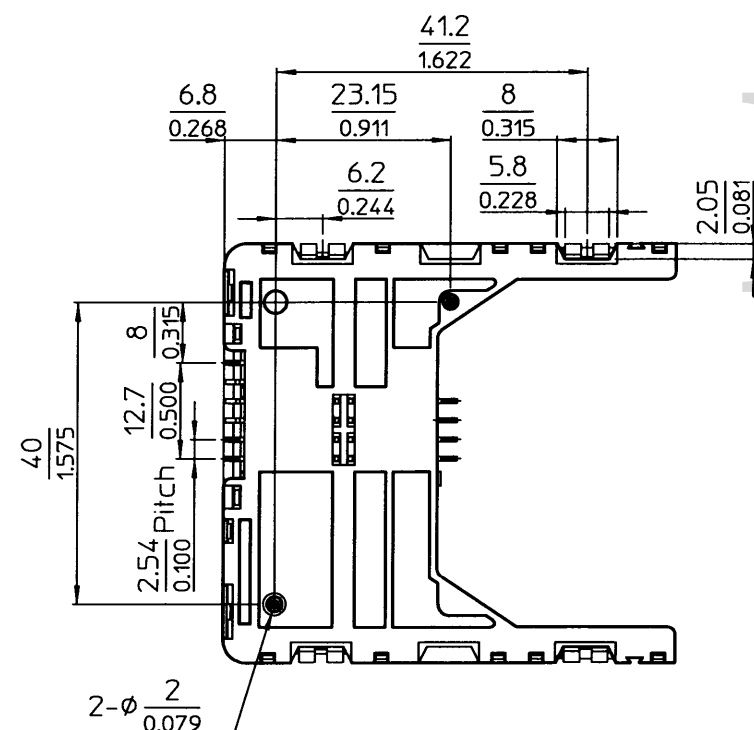

No.	Component	Quantity	Material	Finish
7	Mounting Clip	4	Copper alloy	Gold
6	Switch P2	1	Copper alloy	SEE NOTE4
5	Switch P1	1	Copper alloy	SEE NOTE4
4	Contact P2	4	Copper alloy	SEE NOTE4
3	Contact P1	4	Copper alloy	SEE NOTE4
2	Cover	1	Glass-filled PPS(UL94V-0), Black	—
1	Insulator	1	Glass-filled LCP(UL94V-0), Black	—

△ x				
△ x				
△ x				
△ x				
REV. DATE	APPROVED BY	DRAWN BY	DESCRIPTION	
THIRD ANGLE PROJECTION	DRAWN BY E. Miyazaki Apr. 19, 2006	DATE CHECKED BY T. Mogami Apr. 19, 2006	DATE APPROVED BY A. Shimada Apr. 19, 2006	DATE SCALE 1:1
MATERIAL	TITLE ISC3-08L-F		KEL CORPORATION	
FINISH			DRAWING No. P3A110	REVISION 1