


PART NUMBER
SEE PAGE 2

BOM OF 10138200-10XLF			
INDEX NO:	DESCRIPTION	MATERIAL	QTY
1	GROMMET	SILICONE	1
2	SPRING BUSH	SS	1
3	CABLE CONNECTOR HOUSING - REAR	TRANSPARENT PC	1
4	TERMINAL BLOCK ASSEMBLY	COPPER ALLOY+LCP	2
5	CABLE CONNECTOR HOUSING - FRONT	PBT,COLOUR BLACK	1
6	BOTTOM SHIELD	COPPER ALLOY	1
7	TOP SHIELD	COPPER ALLOY	1


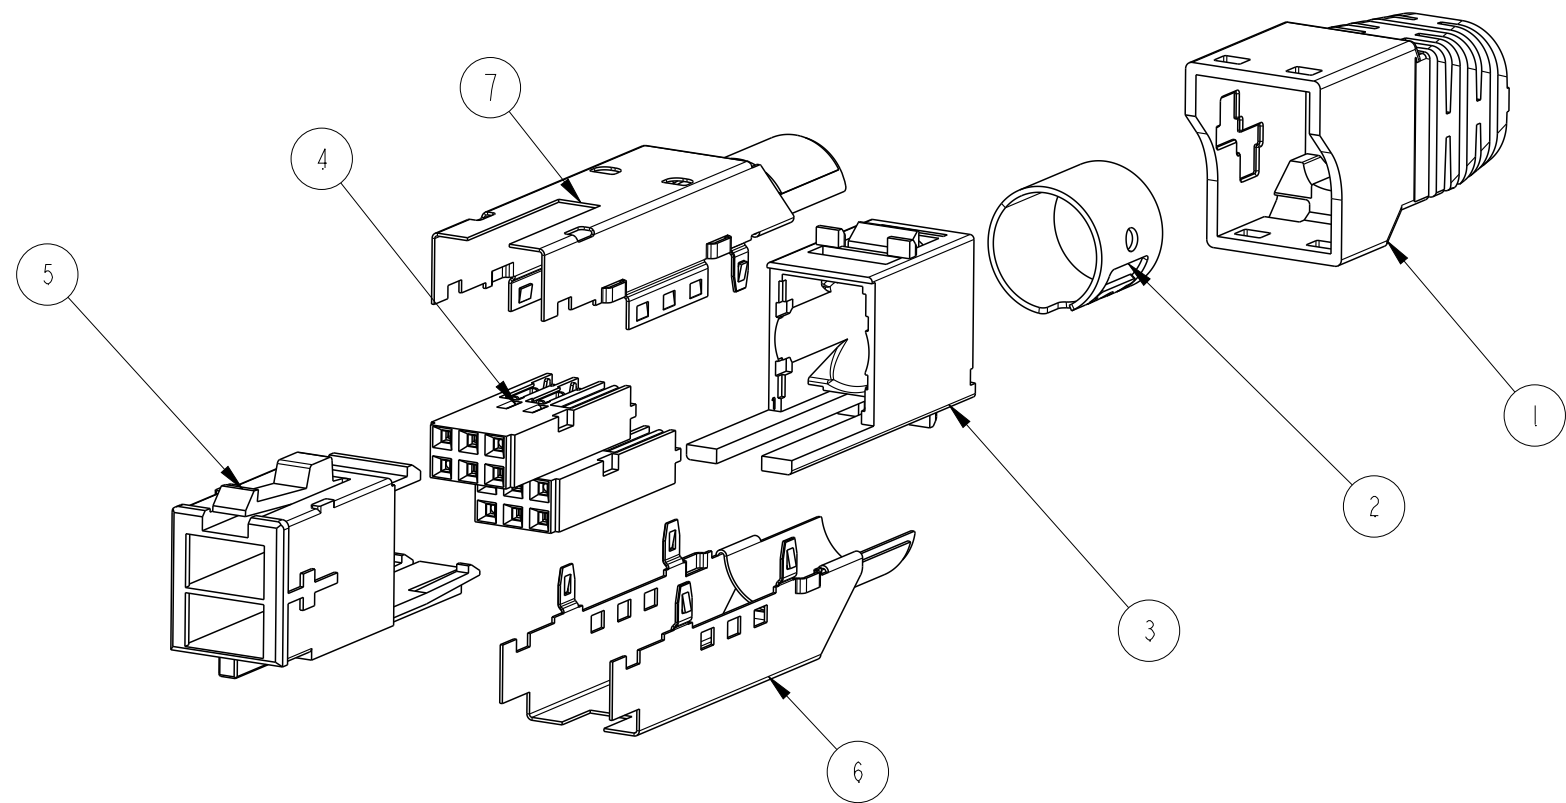



FRONT VIEW

REAR VIEW-EXCLUDING
SHIELDS AND REAR HOUSING

NOTE:

- 1. PRODUCT SPECIFICATION: GS-12-1423
- 2. APPLICATION SPECIFICATION: GS-20-0556
- 3. PERFORMANCE LEVEL: TELCORDIA CO
- 4. FLAMMABILITY CLASSIFICATION: UL94 V-0
- 5. RoHS COMPLIANT
- 6. WIRE SIZE:
SIGNAL: AWG24/AWG26
- 7. WIRE INSULATION DIAMETER: MAX 1 MM

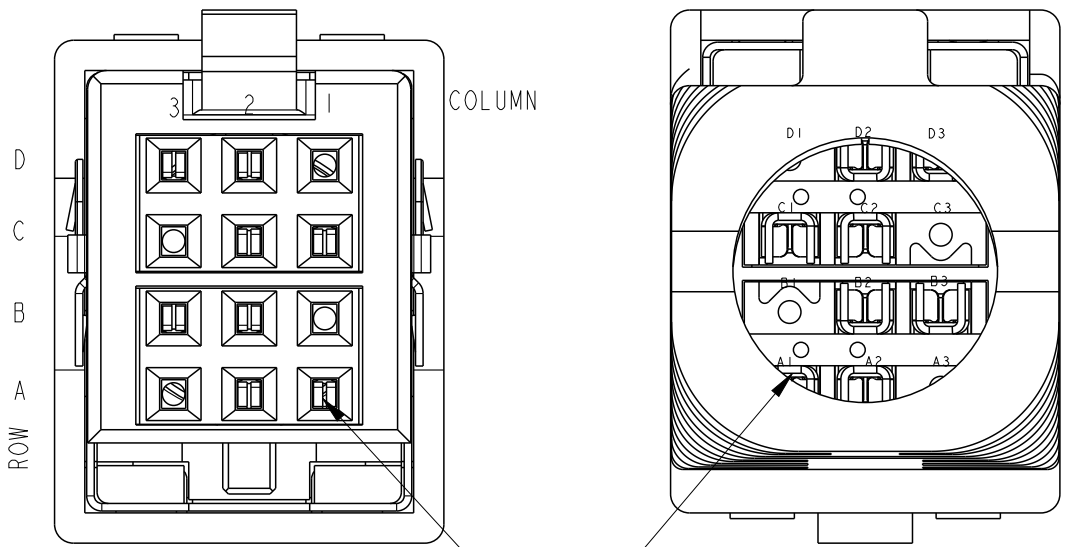

spec ref -		dr Jibin John		2016/10/28		projection 	MM 	size A3	scale 1:1	
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng Varghese, Bone	2018/10/22		ecn no ELX-I-30491-1					
ISO 406 ISO 1101		chr -	-		rel level Released					
appr K-Paul Biju		2018/10/24		product family BOLTRACK						
surface  ISO 1302	linear	0.X	±0.3	Amphenol FCi	title SHIELDED CABLE CONNECTOR KIT BOLTRACK	dwg no 10138200	rev C			
		0.XX	±0.13							
		0.XXX	±0.05							
	angular	0°	±2°						cat. no. -	

CONTACT LOADING PATTERN						
SL.NO	AFCI P/N	DESCRIPTION	ROW	COLUMN 3	COLUMN 2	COLUMN 1
1	10138200-101LF	SHIELDED CABLE CONNECTOR- BOLTRACK WITH 8 SIGNAL CONTACTS	D	X	X	-
			C	-	X	X
			B	X	X	-
			A	-	X	X
2	10138200-102LF	SHIELDED CABLE CONNECTOR- BOLTRACK WITH 10 SIGNAL CONTACTS	D	X	X	X
			C	-	X	X
			B	X	X	X
			A	-	X	X
3	10138200-103LF	SHIELDED CABLE CONNECTOR- BOLTRACK WITH 12 SIGNAL CONTACTS	D	X	X	X
			C	X	X	X
			B	X	X	X
			A	X	X	X

"X" INDICATES CONTACT LOADING


WIRING ROUTING CHART					
SL.NO	AFCI P/N	ROW	COLUMN 3	COLUMN 2	COLUMN 1
1	10138200-101LF	D	BROWN	WHITE	-
		C	-	GREEN	WHITE
		B	ORANGE	WHITE	-
		A	-	BLUE	WHITE
2	10138200-102LF *	D			
		C			
		B			
		A			
3	10138200-103LF *	D			
		C			
		B			
		A			

* Wiring routing to be defined


spec ref -				dr Jibin John		2016/10/28		projection		MM		size A3		scale 1:1			
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED				eng Varghese, Bone		2018/10/22						ecn no ELX-I-30491-1			
ISO 406						chr -		-									
ISO 1101						appr K-Paul Biju		2018/10/24						product family BOLTRACK		rel level Released	
surface		linear		0.X ±0.3		±0.13		Amphenol FCI		title SHIELDED CABLE CONNECTOR KIT		dwg no 10138200		rev C			
																0.XX	
																0.XXX ±0.05	
ISO 1302		angular 0° ±2°				cat. no. -		Product - Customer Drw		sheet 2 of 3							

PACKAGING INFORMATION


BLISTER PACKING WITH ASSEMBLY INSTRUCTION CARD

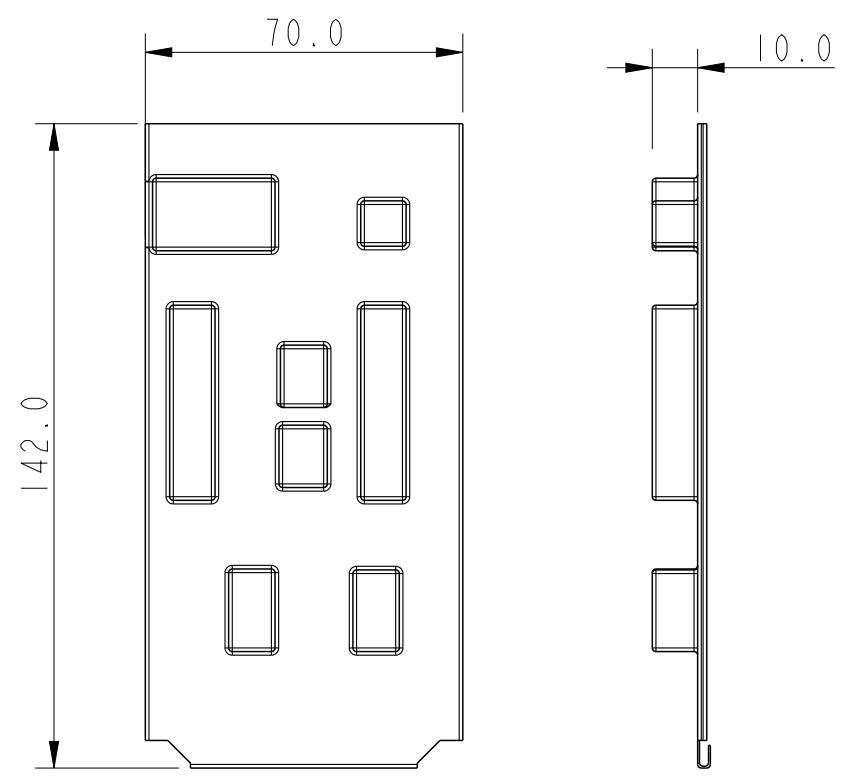

SHIPPABLE CARTON
(DIMENSION: 345x250x154)
100 PCS PER BOX

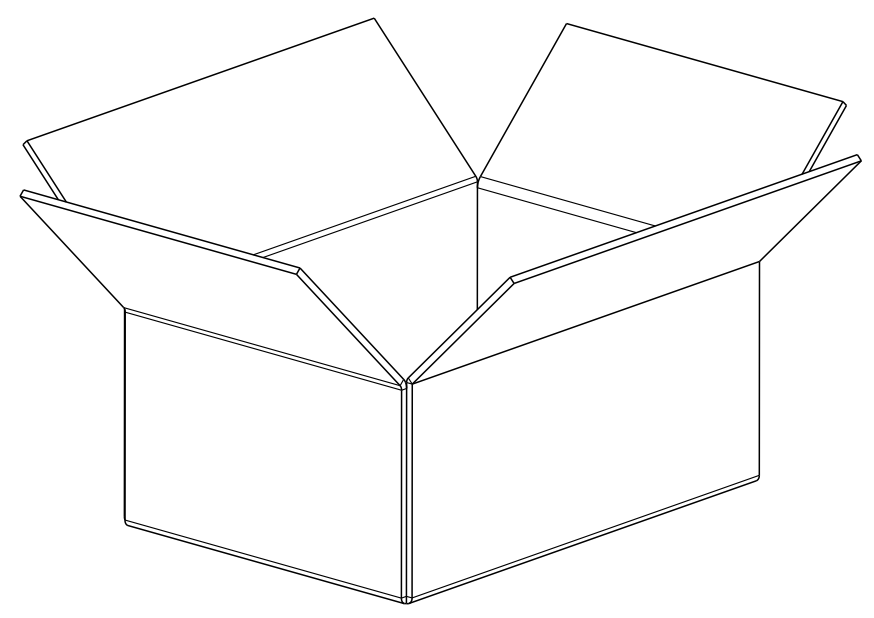

SEALED CARTON

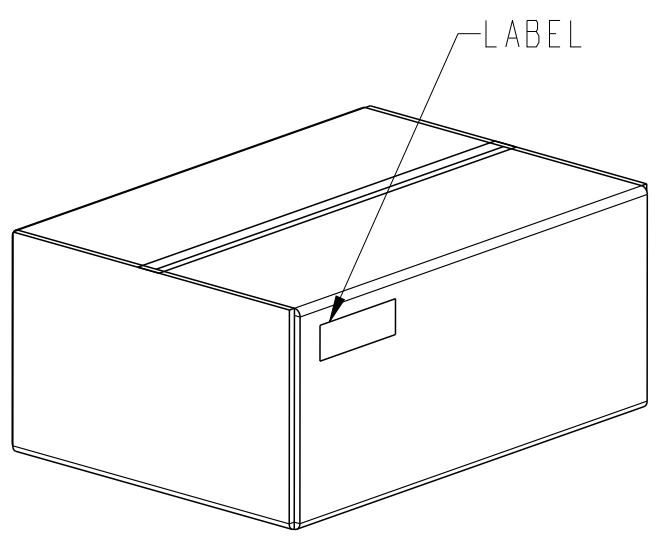

BLISTER PACKING MATERIAL : ANTI STATIC PVC, THICKNESS 0.4 MM
INSTRUCTION CARD : 300 GSM ART CARD

spec ref -				dr Jibin John		2016/10/28		projection 	MM 	size A3	scale 1:1		
tolerance std ISO 406 ISO 1101	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng Varghese, Bone		2018/10/22				ecn no ELX-I-30491-1			
				chr -		-				rel level Released			
				appr K-Paul Biju		2018/10/24							
								product family BOLTRACK					
surface  ISO 1302	linear	0.X ±0.3		Amphenol FCI	title	SHIELDED CABLE CONNECTOR KIT				dwg no	10138200		rev C
		0.XX ±0.13											
		0.XXX ±0.05											
	angular	0° ±2°						cat. no. -			Product - Customer Drw		

Amphenol FCI

© 2016 AFCI