


Aug. 1. 2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


【 ASSEMBLE TOOL 】

- Jig for soldering center and outer conductor:
MMCX(AR)-P-SF/SO-MD2
- Jig for press fitting of cap:
MMCX(AR)-LP-SF085/CV-MD2

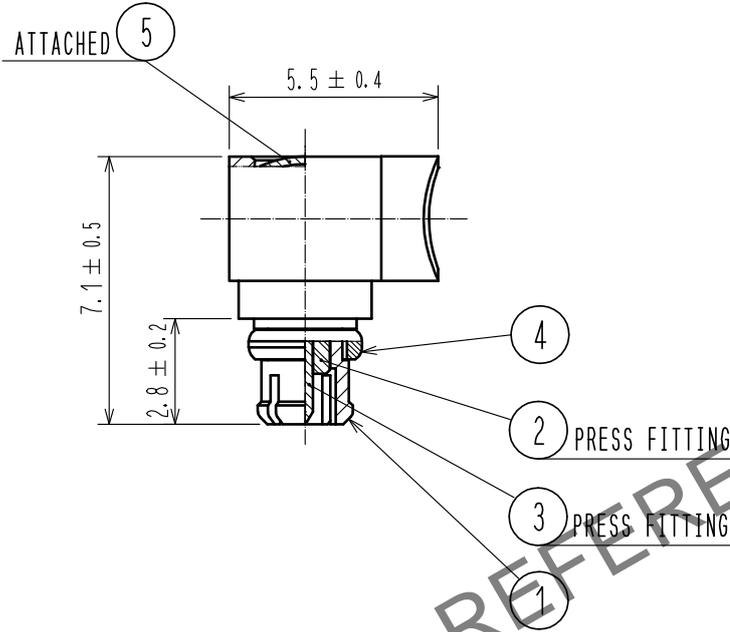

【 USAGE PRECAUTIONS OF MMCX(AR) 】

1. Insertion or extraction a plug of MMCX(AR) as perpendicularly as possible with aligning the plug with a receptacle. When aligned insertion or extraction is not performed, it would damage or deform an outer conductor part.
2. Do not apply excess load on soldered section with cable

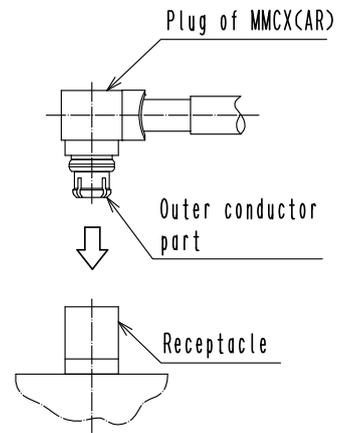

3	PHOSPHOR BRONZE	GOLD PLATING							
2	PTFE			5	BRASS	NICKEL PLATING			
1	BRASS	GOLD PLATING		4	BERYLLIUM COPPER	GOLD PLATING			
NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS		
UNITS mm		SCALE 5 : 1	COUNT 	DESCRIPTION OF REVISIONS			DESIGNED	CHECKED	DATE
HRS HIROSE ELECTRIC CO., LTD.	APPROVED	: KY. SHIMIZU	16. 07. 25	DRAWING NO.		EDC-366327-00-00			
	CHECKED	: KY. SHIMIZU	16. 07. 25	PART NO.		MMCX(AR)-LP-SF085			
	DESIGNED	: TM. YOSHIDA	16. 07. 25	CODE NO.		CL339-0042-0-00			
	DRAWN	: TM. YOSHIDA	16. 07. 25			1/1			