



Connectors > Rectangular Connectors > Standard Rectangular Connectors



Connector Product Type: **Housing**
Connector & Housing Type: **Plug**
Termination Method to Wire & Cable: **Crimp**
Connector System: **Cable-to-Cable, Cable-to-Panel**
Contact Retention Within Housing: **With**

Features

Product Type Features

Connector Product Type	Housing
Connector & Housing Type	Plug
Connector System	Cable-to-Cable, Cable-to-Panel
Sealable	No
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Signal Positions	41
Number of Power Positions	41
Number of Positions	41
Number of Rows	3

Electrical Characteristics

Operating Voltage	250 VAC
-------------------	---------

Body Features

Primary Product Color	Black
-----------------------	-------



Contact Features

Contact Type	Pin
Contact Retention Within Housing	With
Contact Current Rating (Max)	13 A

Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

Mechanical Attachment

Panel Mount Feature	With
Panel Mount Feature Type	Screw Mount
Connector Mounting Type	Panel Mount

Housing Features

Housing Material	Phenolic
Centerline (Pitch)	3.81 mm[.15 in]

Dimensions

Row-to-Row Spacing	3.3 mm[.13 in]
Connector Width	11.18 mm[.44 in]
Connector Height	68.25 mm[2.687 in]
Wire Size	30 – 14 AWG
Connector Length	23.24 mm[.915 in]

Usage Conditions

Operating Temperature Range	-55 – 150 °C[-67 – 302 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Industry Standards

Glow Wire Rating	Standard Part - Not Glow Wire
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	116
Packaging Method	Carton

Product Compliance

For compliance documentation, visit the product page on TE.com>




EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Also in the Series | AMP M Series

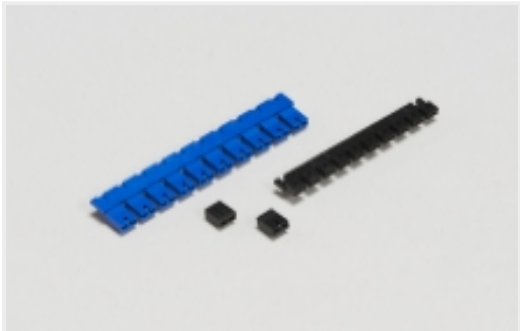


Board-to-Board Jumpers & Shunts(5)




Connector Contacts(51)

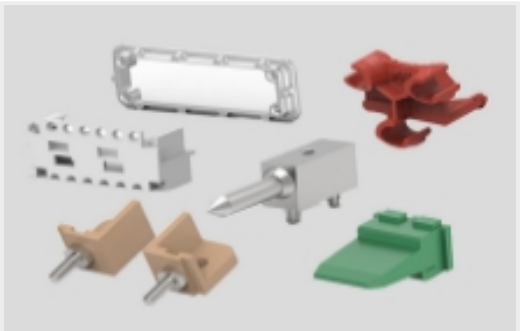


Connector Hardware(47)




Power Contacts(51)



Rectangular Connector Housings(77)




Rectangular Power Connectors(82)

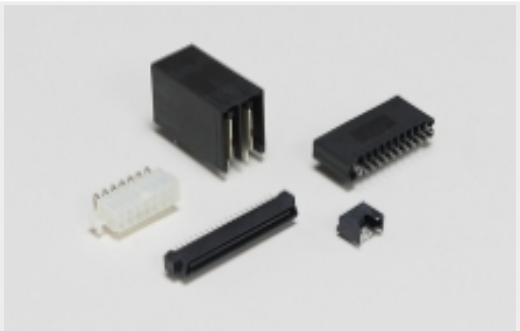


Standard Rectangular Connectors(81)




Customers Also Bought




TE Part #255111-000
55A1811-22-9-9CS2275




TE Part #5-1617785-7
FCA-410-1521L=M83536/15-021L




TE Part #2-1419106-3
27E891=SOCKET,KRPA,8,OCTAL,
DINRAIL




TE Part #1-608036-4
SILICONE FUSION TAPE,1\"X15'

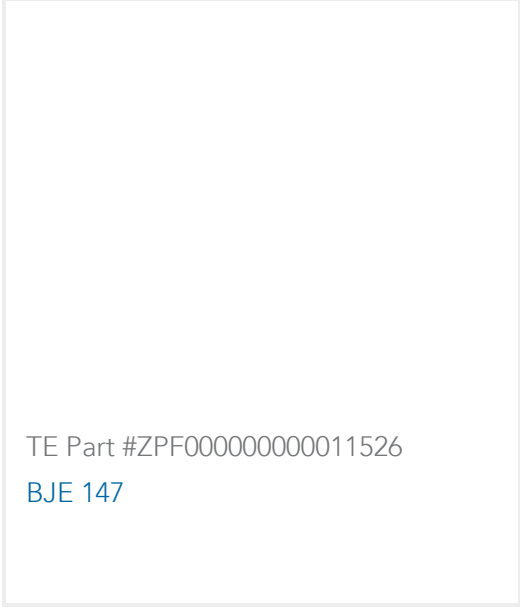


TE Part #ZPF0000000000011526
BJE 147




TE Part #3-1393104-2
KRPA-11AN-120=KRPA




TE Part #ZPF0000000000000570
020-0511-20



TE Part #CB0216-000
S200-4-W2-20-9



TE Part #EG8290-000
S1260-TAPE-3/4INX25FT-CL



TE Part #F97579-000
CP-101635-2.5-X

Documents

Product Drawings

41 POS. MALE DEEP BLOCK

English

CAD Files

Customer View Model

ENG_CVM_202135-2_M.3d_igs.zip

English

Customer View Model

ENG_CVM_202135-2_M.3d_stp.zip

English

Customer View Model

ENG_CVM_202135-2_M.2d_dxf.zip

English

3D PDF

English

Customer View Model



[ENG_CVM_CVM_202135-2_AA.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_202135-2_AA.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_CVM_202135-2_AA.2d_dxf.zip](#)

English

[3D PDF](#)

3D

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[M_SERIES_PIN_AND_SOCKET_CONNECTORS](#)

English

Instruction Sheets

[Instruction Sheet \(U.S.\)](#)

English

[6, 14, 20 AND 41 POSITION SERIES "M" CONNECTORS](#)

English