




**Part Number :** [10883041](#)  
**Product Description :** 2.54mm Pitch C-Grid Breakaway Header, High Profile, Dual Row, Right Angle, 4 Circuits, 6.10mm Mating Pin Length, Tin (Sn) Plating  
**Series Number :** 70216  
**Status :** Active  
**Product Category :** PCB Headers and Receptacles  
**Engineering Number :** 70216-0079

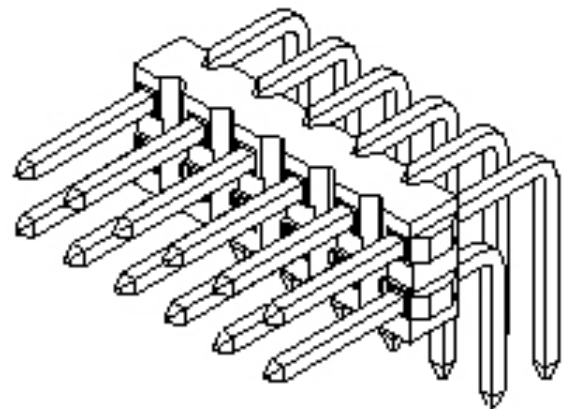

## Documents & Resources


**Drawings**  
[010883041\\_sd.pdf](#)  
[PK-70873-0353-001.pdf](#)

**3D Models and Design Files**  
[010883041\\_stp.zip](#)

**Specifications**  
[713080001-AS-000.pdf](#)  
[PS-70216-001.pdf](#)

## Product Environment Compliance

### Compliance

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Not Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2024)6225-DC (07 Nov 2024)
EU RoHS	Compliant per EU 2015/863

Multiple Part Product Compliance Statements  
- Eu RoHS  
- REACH SVHC

- Low-Halogen

## Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

## EU RoHS Certificate of Compliance

---

### Part Details

#### General

Status	Active
Category	PCB Headers and Receptacles
Series	70216
Description	2.54mm Pitch C-Grid Breakaway Header, High Profile, Dual Row, Right Angle, 4 Circuits, 6.10mm Mating Pin Length, Tin (Sn) Plating
Application	Board-to-Board, Signal, Wire-to-Board
Component Type	PCB Header
Product Name	C-Grid
UPC	800755011692

#### Agency

CSA	LR19980
UL	E29179

#### Electrical

Current - Maximum per Contact	3.0A
Voltage - Maximum	250V

#### Physical

Breakaway	Yes
Circuits (Loaded)	4
Circuits (maximum)	4
Color - Resin	Black

Durability (mating cycles max)	25
Flammability	94V-0
Glow-Wire Capable	No
Lock to Mating Part	None
Material - Metal	Brass, Phosphor Bronze
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	Polyester
Net Weight	0.351/g
Number of Rows	2
Orientation	Right Angle
Packaging Type	Tube
PC Tail Length	2.79mm
PCB Locator	No
PCB Retention	None
Pitch - Mating Interface	2.54mm
Plating min - Mating	3.810µm
Plating min - Termination	3.810µm
Polarized to Mating Part	No
Polarized to PCB	No
Shrouded	No
Stackable	Yes
Temperature Range - Operating	-40° to +105°C
Termination Interface Style	Through Hole

## Solder Process Data

Max-Duration	5
Lead-Free Process Capability	WAVE
Max-Cycle	1
Max-Temp	235

---

## Mates With / Use With

### Mates with Part(s)

Description	Part Number
-------------	-------------

C-Grid Right-Angle, Dual Row, Surface Mount PCB Receptacles	<u>71979</u>
C-Grid Vertical, Dual Row, High Profile, Surface Mount PCB Connectors	<u>71395</u>
C-Grid Vertical, Dual Row, High Profile, Through Hole PCB Receptacles	<u>71850</u>
2.54mm Pitch C-Grid Shunt Terminal Housings	<u>7859</u>

---

This document was generated on Jan 17, 2025