
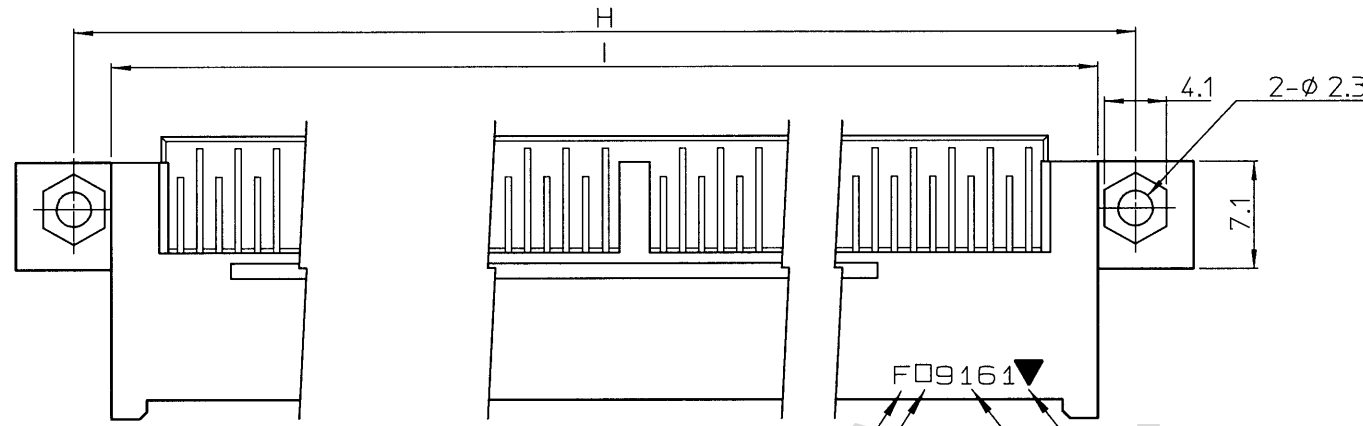
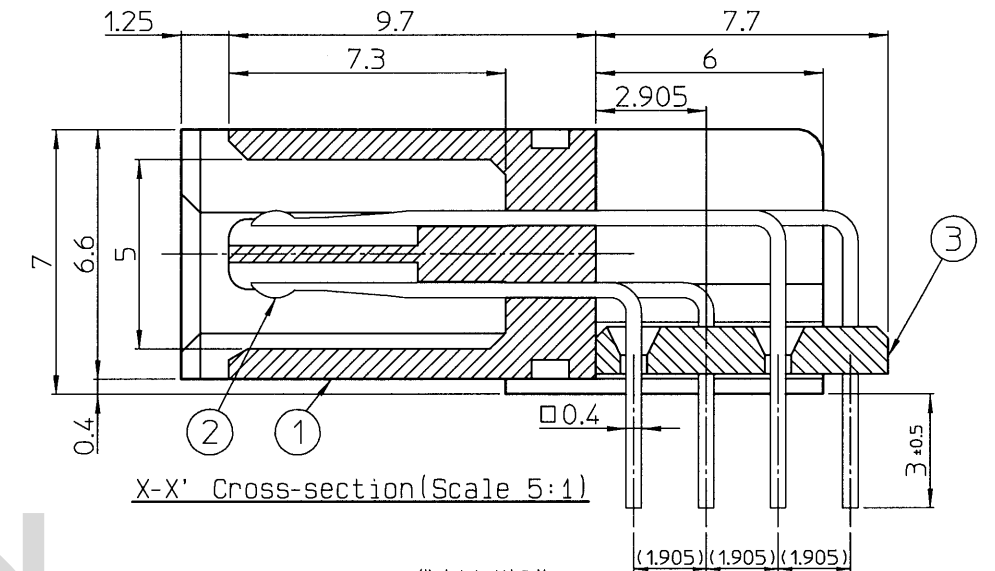


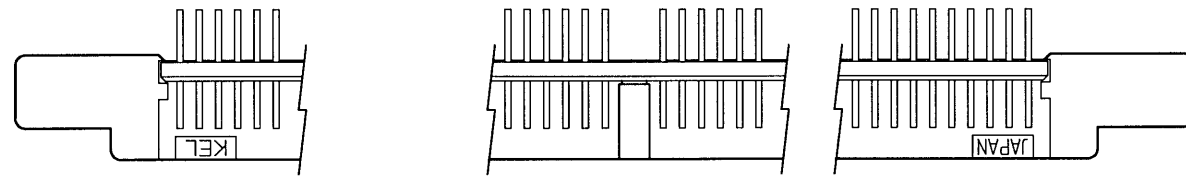

SEE NOTE 2 (Contact area/接触部)

Lot number/ロットNo.

## NOTES

1. Unless otherwise specified, tolerance shall be /指定なき寸法公差

|                            |          |       |
|----------------------------|----------|-------|
| Less than 10.              | / 0~10未満 | +0.2  |
| 10 or more ~ Less than 50. | /10~50未満 | +0.25 |
| 50 or more.                | / 50以上   | +0.3  |

2. Contact finish. /コンタクトの仕上

Under plating Nickel /ニッケルメッキ下地

Contact area : Gold / 接触部:金メッキ仕上  
 Note: 0.05mm or more / 0.05mm以上

None: 0.05μm or more 70.05μm以上  
D: 0.25μm or more 70.25μm以上

H: 0.76μm or more / 0.76μm以上

Terminal area: Tin-copper plating

Formaldehyde and tin-lead plating





3.F:RoHS compliant/RoHS対応品

4. A reference drawing of P.W.B. / 基板設計要領

Board thickness / 適合基板厚  $t=1.6 \begin{smallmatrix} +0.2 \\ -0.1 \end{smallmatrix}$

(Connector mounting side / コネクタ搭載面)

多件上 51

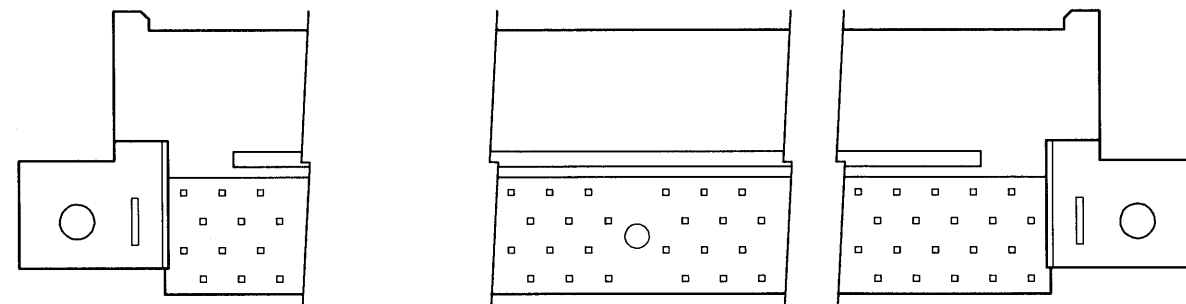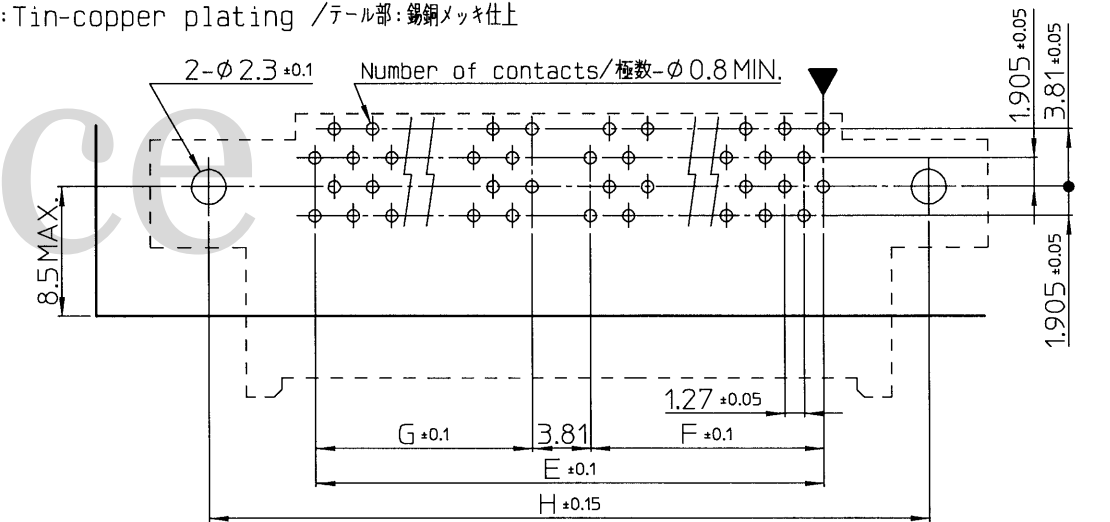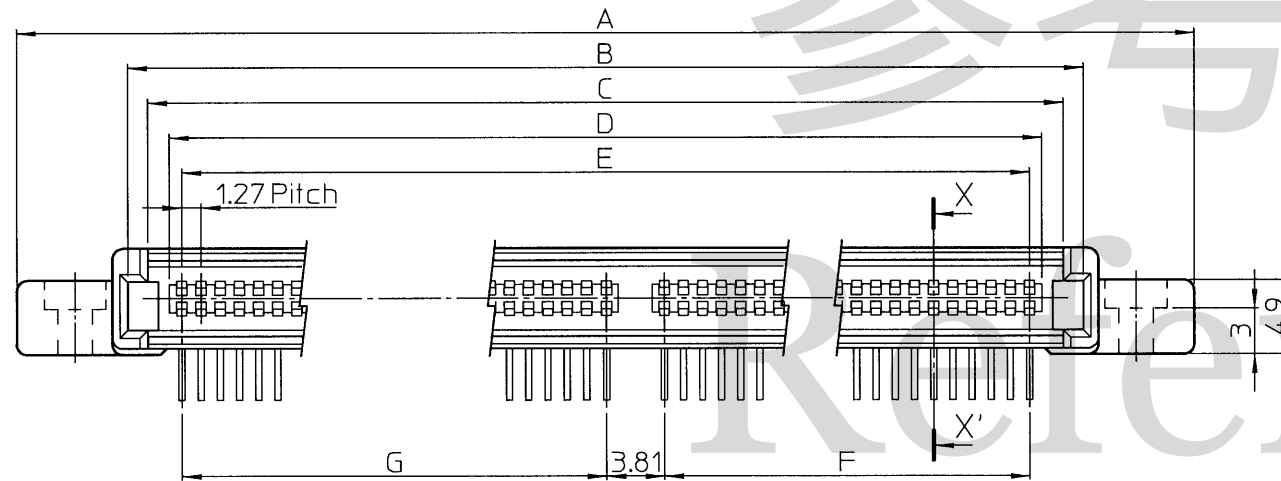

|     |                               |                             |                                                         |               |
|-----|-------------------------------|-----------------------------|---------------------------------------------------------|---------------|
| 3   | Terminal setting plate<br>補正板 | 1                           | Nylon 66 Glass-filled,UL94V-0<br>66ナイロン ガラス繊維入り UL94V-0 | Black<br>黒    |
| 2   | Contact<br>コンタクト              | Number of<br>contacts<br>極数 | Copper alloy<br>銅合金                                     | SEE NOTE2     |
| 1   | Insulator<br>インシュレータ          | 1                           | Nylon 66 Glass-filled,UL94V-0<br>66ナイロン ガラス繊維入り UL94V-0 | Black<br>黒    |
| No. | Component<br>部 品 名            | Quantity<br>数量              | Material<br>材 質                                         | finish<br>仕 上 |

|                           |                    |                               |                        |                      |                                        |                      |              |               |
|---------------------------|--------------------|-------------------------------|------------------------|----------------------|----------------------------------------|----------------------|--------------|---------------|
| △ ×                       |                    |                               |                        |                      |                                        |                      |              |               |
| Apr.20,2021               |                    | N.Saito                       | Y.Abe                  | K.Chan               | Revised for style change. / 様式変更の為、改版. |                      |              |               |
| REV. DATE                 | APPROVED BY        | CHECKED BY                    | DRAWN BY               | DESCRIPTION          |                                        |                      |              |               |
| THIRD ANGLE<br>PROJECTION | DRAWN BY<br>Y. Abe | DATE<br>Oct. 3, 2018          | CHECKED BY<br>N. Saito | DATE<br>Oct. 3, 2018 | APPROVED BY<br>M. Suzuki               | DATE<br>Oct. 4, 2018 | SCALE<br>2:1 | UNIT<br>mm    |
| MATERIAL                  |                    | TITLE<br><br>8816-□□□-170L□-F |                        |                      | KEL CORPORATION                        |                      |              |               |
| FINISH                    |                    |                               |                        |                      | DRAWING No. P3D789                     |                      |              | REVISION<br>2 |