

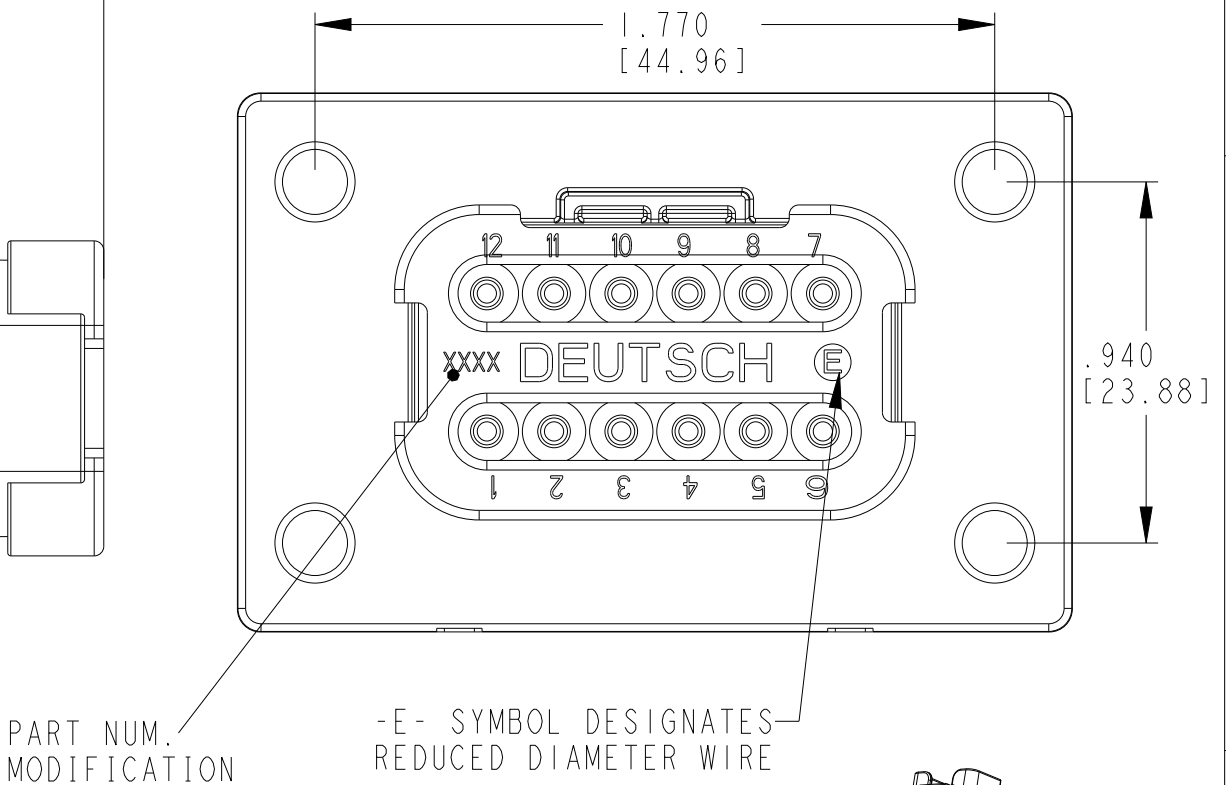
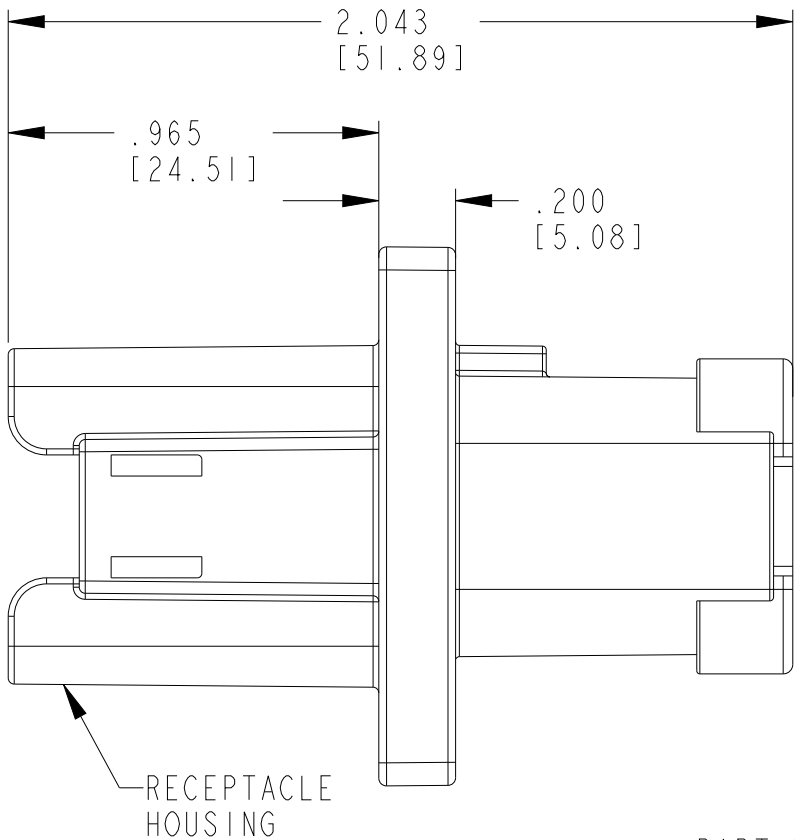


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	REVISED PER E.O P20438	18MAY2010	-	RDR
	B	REVISED PER E-21-004924	28APR2021	PMV	IG
	BI	REVISED PER PCN-22-157426	03NOV2022	MR	IG
	C	REVISED PER PCN-23-192205	06FEB2024	RK	CB

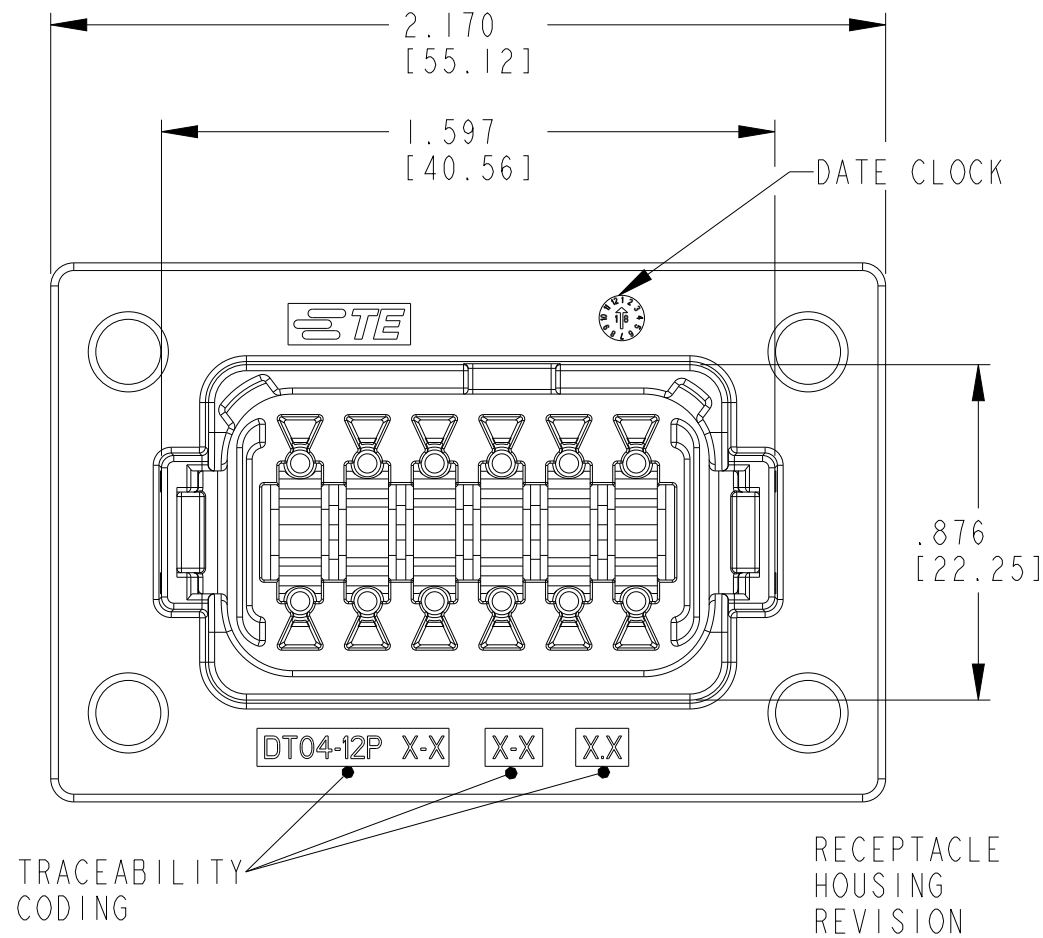

SCALE 1:2

3-DIMENSIONAL VIEW

7. SECONDARY WEDGE LOCK SOLD SEPARATELY: W12P-XXXX.
(XXXX = ALL MODIFICATIONS)

6 RECOMMENDED SCREW: 6-32 [M4].
RECOMMENDED TORQUE: 20-25 IN-LB [2.26-2.82 Nm].


5 MATERIAL - HOUSING: PA66 GF15 (SEE TABLE FOR COLOR)
GROMMET: VMQ (BURNT RED)
WELD CAP: PA66 GF15 (BLACK)

4. THIS RECEPTACLE MATES WITH DT06-12SX-XXXX PLUG.
(X = KEY ARR. A,B,C,D; XXXX = ALL MODIFICATIONS)
CONSULT FACTORY FOR MODIFICATIONS.

3 FOR CONTACT AND WIRE PERFORMANCE AND APPLICATION
CHARACTERISTICS, SEE ENVELOPE DRAWING 0425-015-0000.


NOTES:
2. DELETED
1. DELETED

CONTACT SIZE	MIN. INSUL O.D.	MAX. INSUL O.D.	WIRE RANGE [mm ²] REF ONLY
16	.053 [1.35]	.120 [3.05]	14-20 AWG [2.0-0.5]

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 22MAY2008 R. MESSENGER		TE Connectivity				
DIMENSIONS: INCHES [mm]		CHK 17MAY2010 R. MCCORD						
	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ±.025 [0.64] 4 PLC ± ANGLES ±0° 30' 0"		APVD 17MAY2010 S. BEARD		NAME 12 WAY RECEPTACLE WITH ENHANCED KEY AND FLANGE KEY ARR. A,B,C,D-BL05 MOD. DT SERIES			
			PRODUCT SPEC 108-151009					
			APPLICATION SPEC 114-151009					
			WEIGHT 30.22 g					
MATERIAL 	FINISH - -		CUSTOMER DRAWING		SIZE A3	CAGE CODE 00779	DRAWING NO C-DT04-12PX-BL12	RESTRICTED TO -
					SCALE 2:1	SHEET 1 OF 2		REV C


P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

KEY ARR.	HOUSING COLOR	PART NUMBER
-A-	GRAY	DT04-12PA-BL12
-B-	BLACK	DT04-12PB-BL12
-C-	GREEN	DT04-12PC-BL12
-D-	BROWN	DT04-12PD-BL12

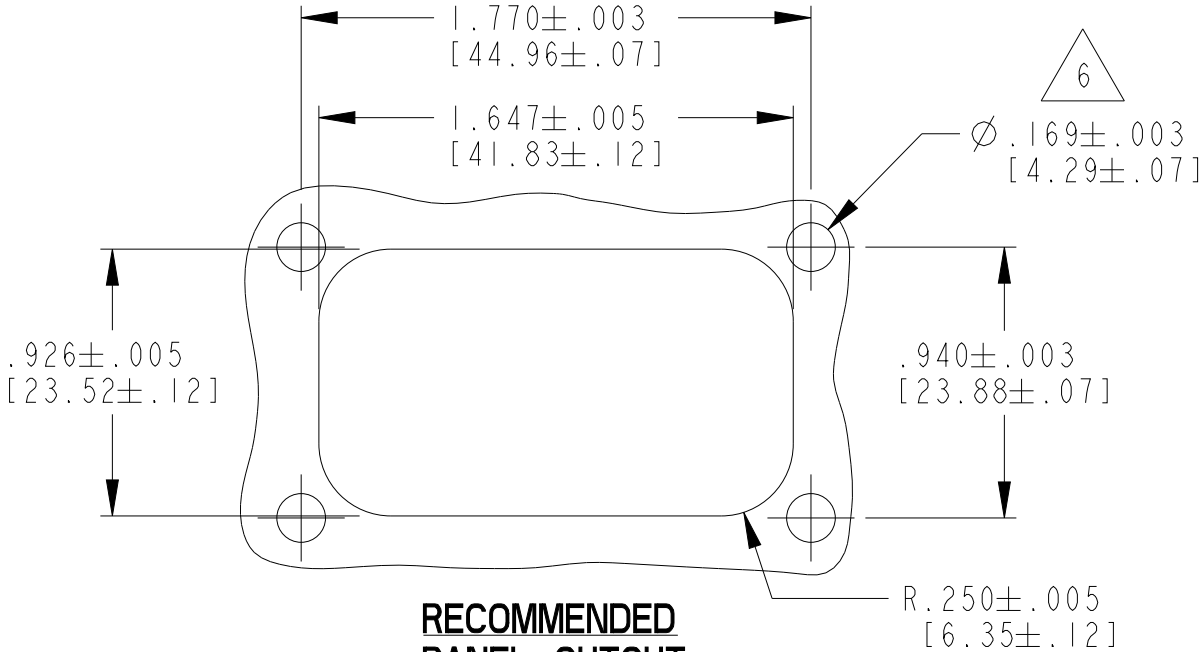


KEY ARRANGEMENT -C-
DT04-12PC-BL12

KEY ARRANGEMENT -D-
DT04-12PD-BL12

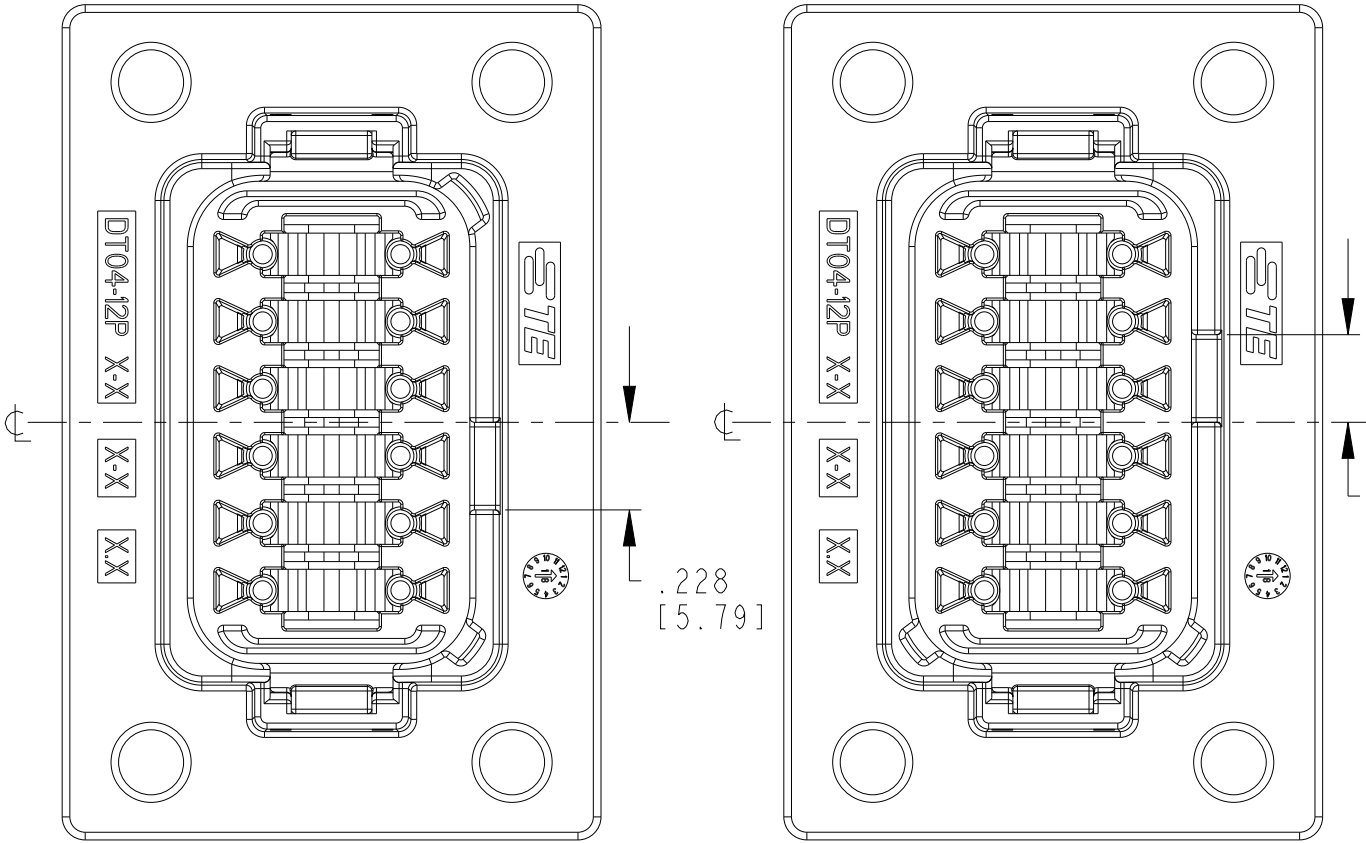

KEY ARRANGEMENT -A-
DT04-12PA-BL12

KEY ARRANGEMENT -B-
DT04-12PB-BL12

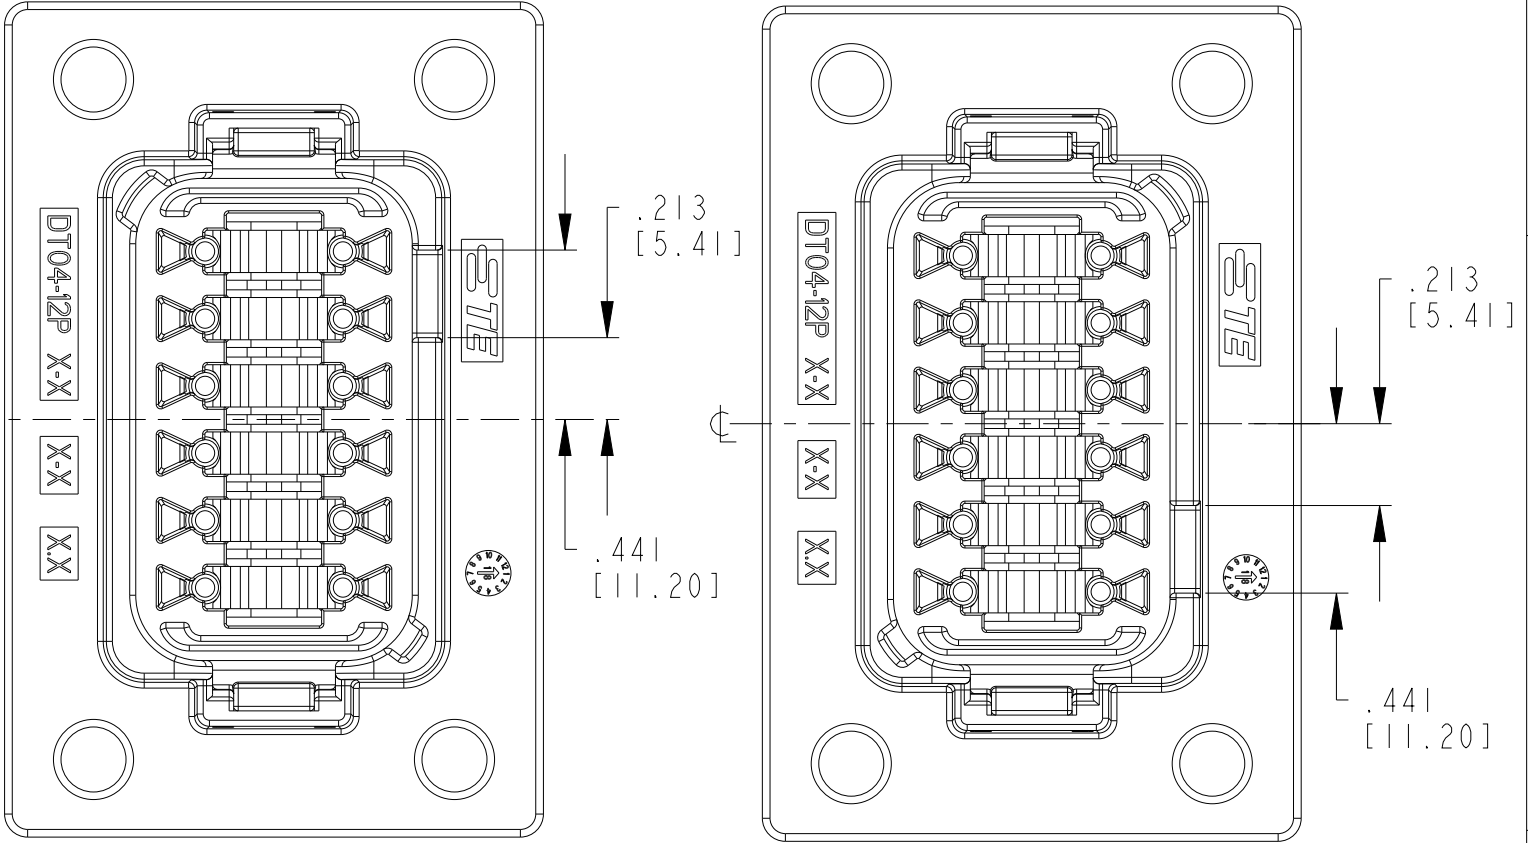

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. MESSENGER 22MAY2008	 TE Connectivity		
		CHK R. MCCORD 17MAY2010			
		APVD S. BEARD 17MAY2010	NAME 12 WAY RECEPTACLE WITH ENHANCED KEY AND FLANGE KEY ARR. A,B,C,D-BL05 MOD. DT SERIES		
DIMENSIONS: INCHES [mm]		PRODUCT SPEC 108-151009			
		APPLICATION SPEC 114-151009			
		WEIGHT 30.22 g	SIZE A3	CAGE CODE 00779	DRAWING NO C-DT04-12PX-BL12
MATERIAL		CUSTOMER DRAWING	SCALE 2:1		SHEET 2 OF 2
					REV C