


Sep.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

【 Assemble tool 】 For center contact crimping : body : MIL-DTL-M22520/7-01
For center contact crimping : positioner : BNC75-12G/CRMD (CL902-3264-0)

For outer conductor crimping : body : MIL-DTL-M22520/5-01
For outer conductor crimping : die : MIL-DTL-M22520/5-59

※Other products can be used when die size is 0.255 inch HEX and width 0.4 inch.

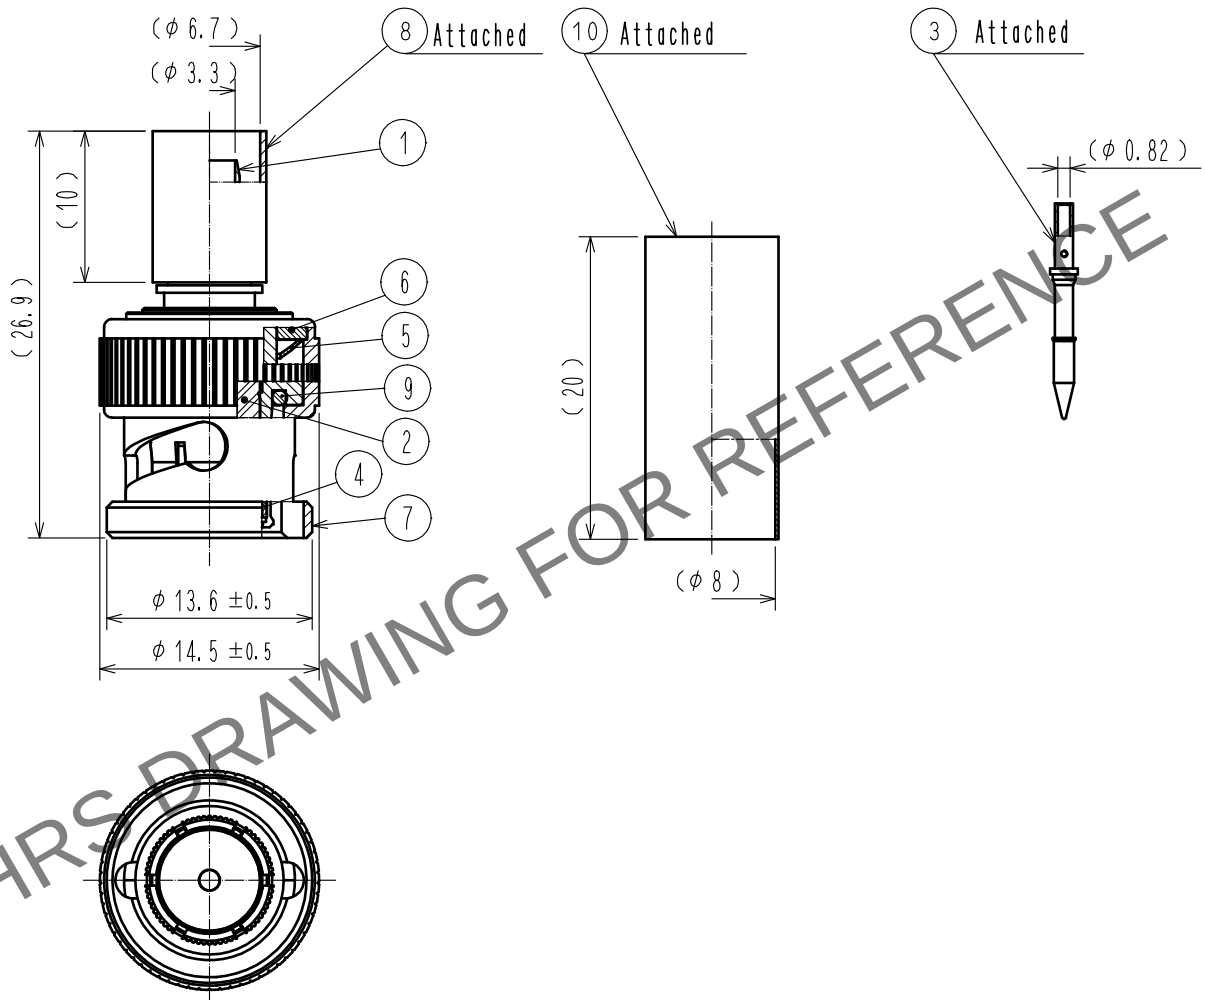

5	BERYLLIUM COPPER	SILVER PLATING	10	POLYOLEFIN	HEAT SHRINK TUBING(BLACK)
4	STAINLESS STEEL	NICKEL PLATING	9	SILICONE RUBBER	
3	BRASS	GOLD PLATING	8	COPPER ALLOY	NICKEL PLATING
2	PTFE		7	BRASS	NICKEL PLATING
1	BRASS	NICKEL PLATING	6	BRASS	NICKEL PLATING
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm					
		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED
					CHECKED
					DATE
APPROVED : TO. KATAYAMA 20190520			DRAWING NO.	EDC-382287-00-00	
CHECKED : TO. KATAYAMA 20190520			PART NO.	BNC(75)-P-3. 3C-12G	
DESIGNED : RO. YOKOYAMA 20190520			CODE NO.	CL302-0092-0-00	
DRAWN : ST. KISHI 20190520				1/1	