




Part Number : [26212041](#)
Product Description : KK 396 Wire-to-Board Header, Vertical Round Pin, 4 Circuits, Tin (Sn) Plating, with Mating Pin Length of 17.47mm (.688")
Series Number : 3192
Status : Active
Product Category : PCB Headers and Receptacles
Engineering Number : 3192-04K

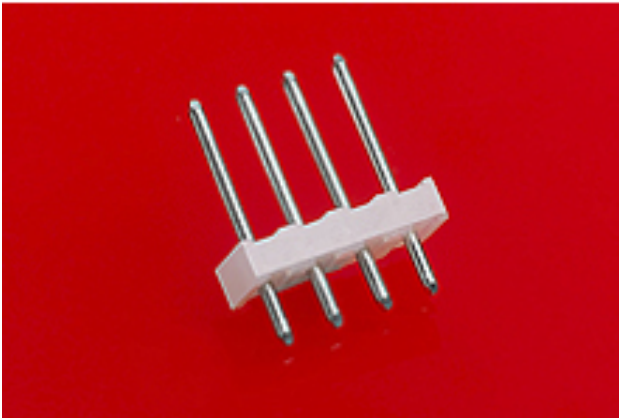

Documents & Resources

Drawings
[026212041_sd.pdf](#)
[PK-3192-001-001.pdf](#)

3D Models and Design Files
[026212041_stp.zip](#)
[SYM-26-20-2041-001.zip](#)

Specifications
[PS-99020-0087-001.pdf](#)

Product Environment Compliance

Compliance

GADSL/IMDS	Not Relevant
China RoHS	Not Reviewed per SJ/T 11365-2006
EU ELV	Not Relevant
Low-Halogen Status	Not Reviewed per IEC 61249-2-21
REACH SVHC	Not Reviewed per D(2024)7663-DC (21 Jan 2025)
EU RoHS	Not Reviewed per EU 2015/863

Multiple Part Product Compliance Statements
- Eu RoHS
- REACH SVHC
- Low-Halogen

Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

EU RoHS Certificate of Compliance

Part Details

General

Status	Active
Category	PCB Headers and Receptacles
Series	3192
Description	KK 396 Wire-to-Board Header, Vertical Round Pin, 4 Circuits, Tin (Sn) Plating, with Mating Pin Length of 17.47mm (.688")
Application	Board-to-Board, Power, Wire-to-Board
Component Type	PCB Header
Product Name	KK 396
UPC	883906460136

Agency

UL	E29179
----	--------

Electrical

Current - Maximum per Contact	7.0A
Voltage - Maximum	250V

Physical

Breakaway	No
Circuits (Loaded)	4
Circuits (maximum)	4
Color - Resin	Natural
Durability (mating cycles max)	25
First Mate / Last Break	No

Flammability	94V-2
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	None
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	Nylon
Net Weight	0.977/g
Number of Rows	1
Orientation	Vertical
Packaging Type	Bag
PC Tail Length	4.45mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.60mm
Pitch - Mating Interface	3.96mm
Pitch - Termination Interface	3.96mm
Plating min - Mating	5.080µm
Plating min - Termination	5.080µm
Polarized to Mating Part	No
Shrouded	No
Stackable	Yes
Temperature Range - Operating	See Product Specification
Termination Interface Style	Through Hole

Solder Process Data

Max-Duration	5
Lead-Free Process Capability	WAVE
Max-Cycle	1
Max-Temp	235

This document was generated on Apr 16, 2025