




P3C309

No.

No.	品名 Part name	数量 Quantity	材質 Material	仕上 Finish
①	#566□-1	10,000	銅合金 Copper alloy	SEE NOTE2
②	リール Reel	1	紙 Paper	—
③	層間紙 Sandwich paper between layers of contact	1	紙 Paper	—

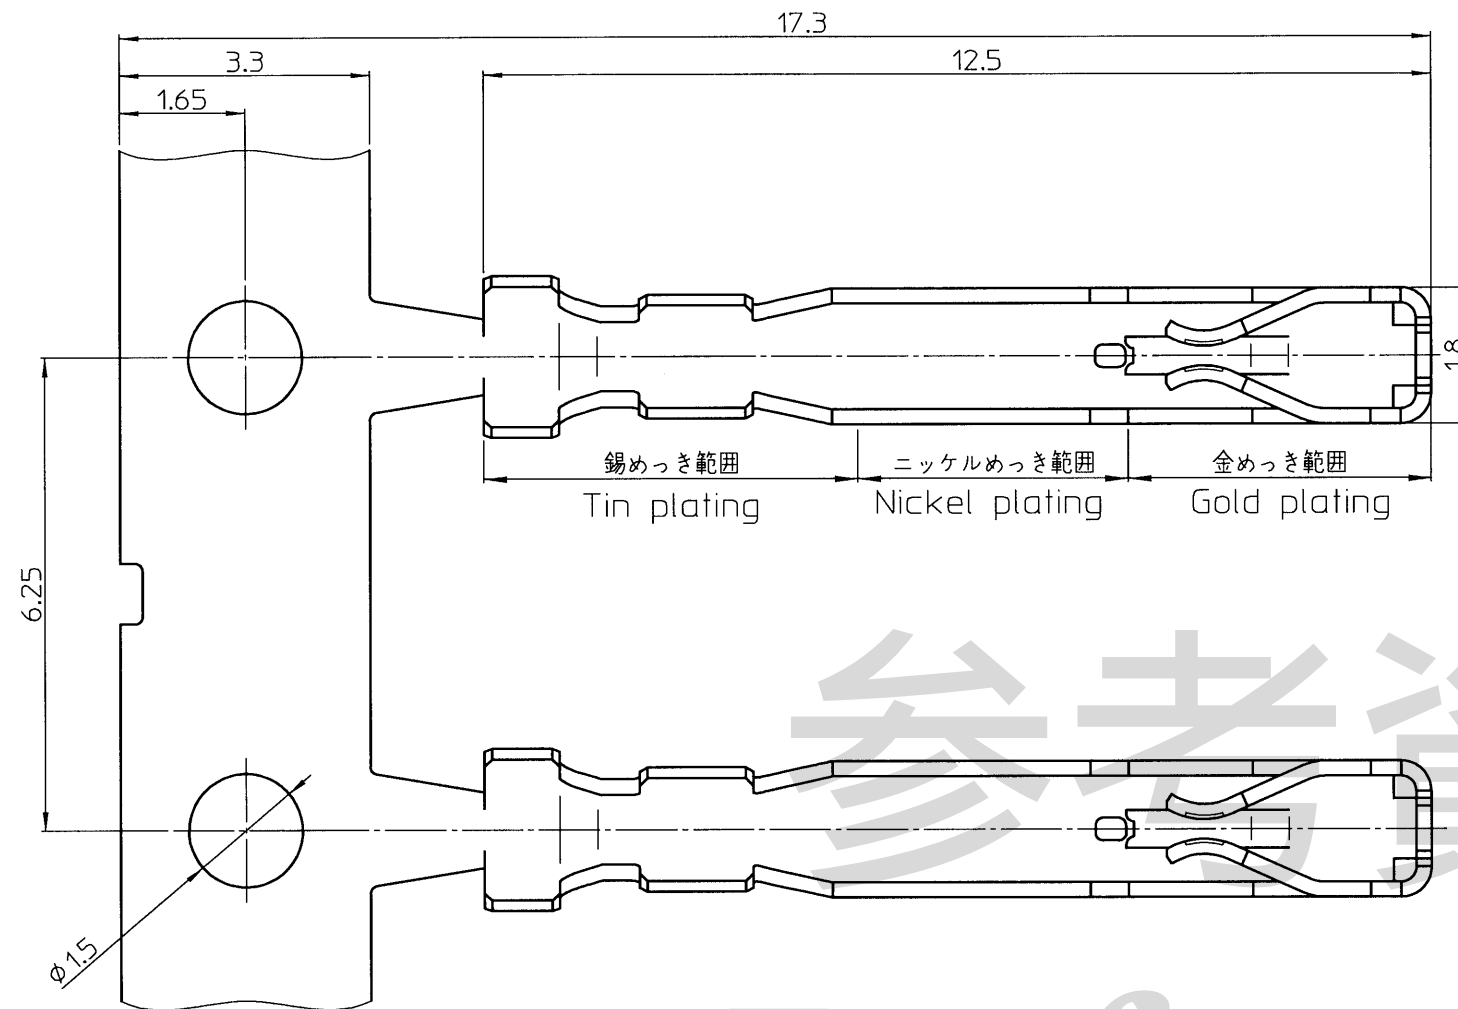

X-X'断面/Cross-section




Y-Y'断面/Cross-section


NOTES

- 指定なき寸法公差/Unless otherwise specified, tolerance shall be
0~10未満/Less than 10 ± 0.2
10以上/10 or more ± 0.3
- #566□-1仕上/Finish
ニッケルめっき下地/Under plating Nickel
接触部/金めっき(SEE NOTE3)/Contact area/Gold plating(SEE NOTE3)
圧着部/錫めっき仕上/Crimp area/Tin plating (1.0 μ m以上/or more)
- 品名/Part name
#566□-1
適合ケーブルサイズ/Applicable cable size
AWG26, 28(ケーブル被覆外径Dia. $\phi 0.88 \sim 1.32$)
AWG26, 28(Insulation Dia. $\phi 0.88 \sim 1.32$)
接触部/金めっき
Contact area/Gold plating
無:0.05 μ m以上/None:0.05 μ m or more
D:0.25 μ m以上/ D:0.25 μ m or more
FA01用圧着コンタクト/Crimp contact for FA01
- アセンブリツール/Assembly tools

コンタクト Contact	圧着アプリケーション/Crimping applicator 日本オートマチックマシン(株)/Japan Automatic Machine Co., Ltd.	圧着ハンドツール Crimping hand tool
#566□-1	CFS815200	CH-02

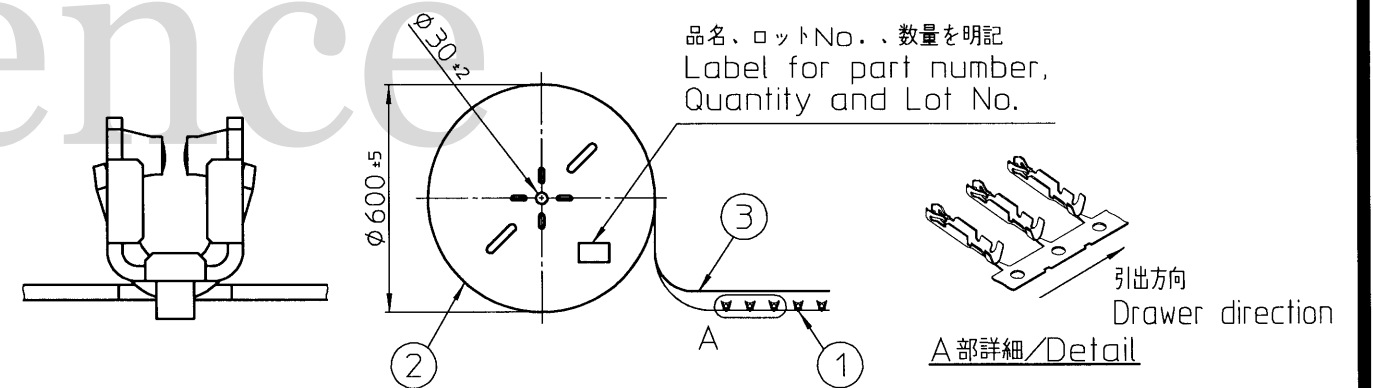

梱包形態/Packaging illustration(1:20)

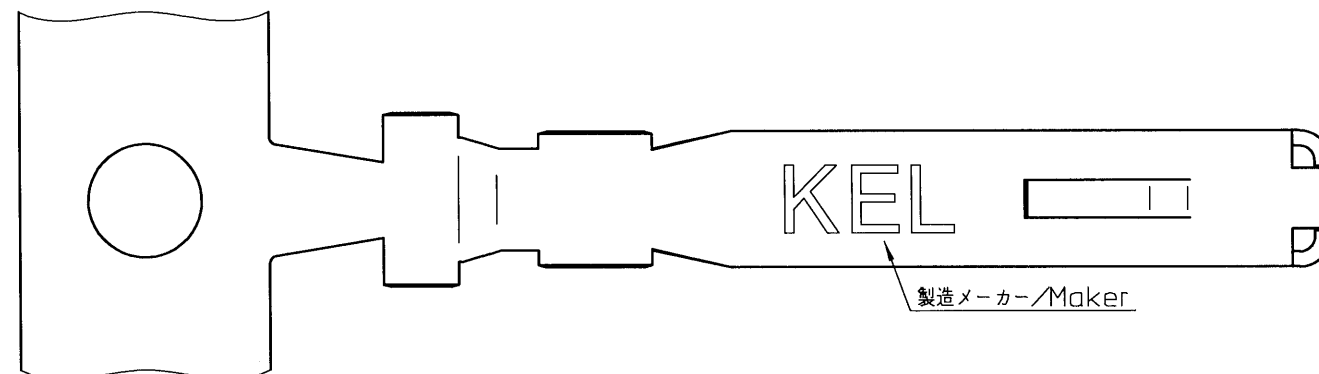

△ ×				
△ ×				
Nov.30,2020	n. Sugita	S. Takao	Y. Aoki	英文、下面図、寸法、断面追加のあり、改版./Add English, Bottom view, Size and Cross-section.
REV. DATE	APPROVED BY	CHECKED BY	DRAWN BY	DESCRIPTION
THIRD ANGLE PROJECTION	DRAWN BY S. Takao	DATE Jan.21,2011	CHECKED BY N. Sugita	DATE Jan.24,2011
MATERIAL	TITLE #566□-1			APPROVED BY A. Shimada
FINISH	KEL CORPORATION			DATE Jan.24,2011
	DRAWING No. P3C309			UNIT 10:1 mm
	REVISION 2			